


H-WHC - Wire harness Clamp

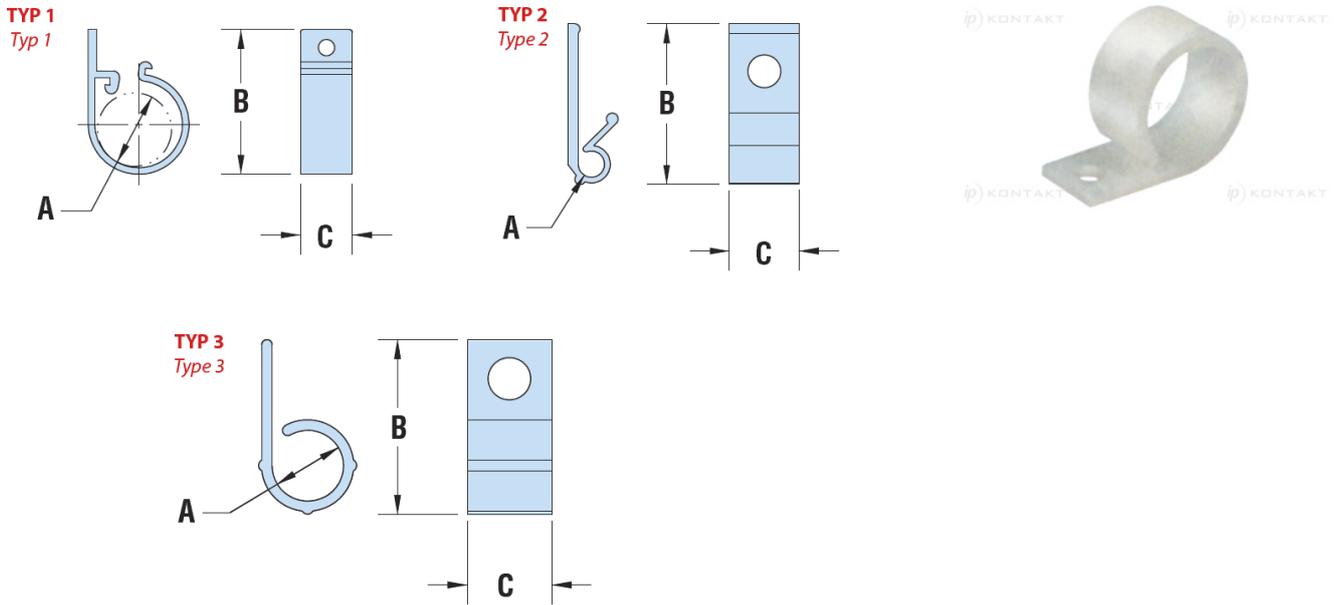

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- Temperature range: 0°C to 85°C
- Ideal for securing, insulating, and routing cable and tubing.
- Cable and wire can be installed or removed for repair without removing clamp.
- Mounts with screws, mounting buttons or rivets
- No reinforcing ribs on Part No. 4126

Symbol	Mounting hole diameter	Max. cable bundle diameter A	B	C	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]				
H-4127	4	12.7	30	10	1	PA 66	UL94 V-2	natural
H-4148	4	18	35.1	12.7	1	PA 66	UL94 V-2	natural
H-4149	4	3.2	19.5	8.5	2	PA 66	UL94 V-2	natural
H-4126	4	6.4	21	10	3	PA 66	UL94 V-2	natural
H-4150	5.2	6.4	21.8	10.4	3	PA 66	UL94 V-2	natural
H-4151	5.2	9	21	10.2	3	PA 66	UL94 V-2	natural
H-4152	5.2	12.5	29.4	10.2	3	PA 66	UL94 V-2	natural
H-4153	5.2	15.9	28.6	12.7	3	PA 66	UL94 V-2	natural
H-4154	5.2	19.1	32.5	12.7	3	PA 66	UL94 V-2	natural
H-4210	5.2	25.1	38.1	12.7	3	PA 66	UL94 V-2	natural
H-4211	5.2	38.1	53.9	12.7	3	PA 66	UL94 V-2	natural