
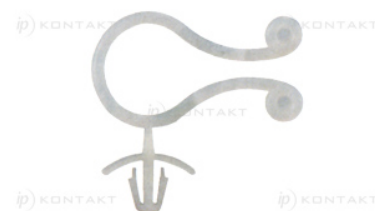


H-WLS - Wave Locks - Side Entry - Arrowhead Mount

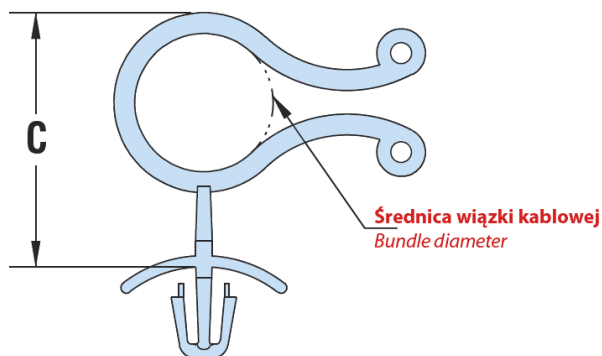

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- Temperature Range: 0°C do 85°C
- Barreled ends for greater holding power.
- Smooth rounded edges won't cut into cable's insulations - or installer's hand.
- Locking ends twist into place with fingertip pressure.
- Mounting hole diameter: 4.8 mm

Symbol	Cable diameter range	C	Mounting hole diameter	Panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-12094	12.7 - 15.2	22.8	4.8	1.6	PA 66	UL94 V-2	natural