

IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

H-WP - Window “View Port” Plugs

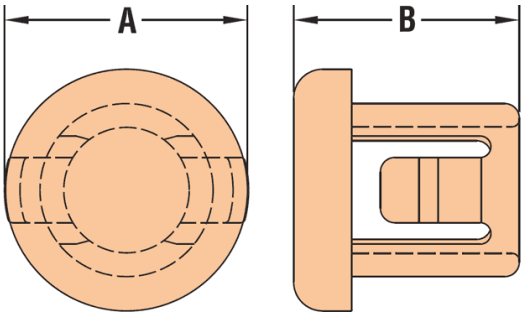

Dla pojedynczej grubości panelu
Single panel thickness design

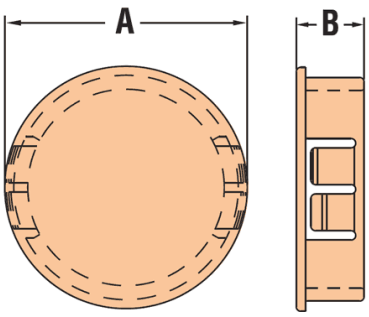

Dla wielu grubości panlu
Multiple panel thickness design





Okienko podczerwini
Infrared window plug



Okienko niebieskie
Blue transparent window plug

Details:

- **Material: Polycarbonate**
- **Flammability rating: UL94 V-2**
- **Colour: clear, other colours available on special order**
- Temperature Range: -40°C to 115°C
- Plugs for panel thickness 3.2 mm have multiple locking fingers for fractional thickness
- Molded of transparent polycarbonate for internal viewing or light transmission

Symbol	Mounting hole diameter range	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-1300	4.7	6.4	5.9	1.6 max.	PC	UL94 V-2	clear
H-1301	6.4	7.9	7.9	1.6 max.	PC	UL94 V-2	clear
H-1302	7.9	9.5	7.9	1.6 max.	PC	UL94 V-2	clear
H-1303	9.5	11.9	10.3	3.2 max.	PC	UL94 V-2	clear
H-1304	11.1	13.5	10.3	3.2 max.	PC	UL94 V-2	clear
H-1305	12.7	14.3	10.3	3.2 max.	PC	UL94 V-2	clear
H-1307	15.9	18.6	10.3	3.2 max.	PC	UL94 V-2	clear
H-1309	19.3	21.8	10.3	3.2 max.	PC	UL94 V-2	clear
H-1311	22.2	24.2	11.5	3.2 max.	PC	UL94 V-2	clear
H-1312	25.4	28.6	11.5	3.2 max.	PC	UL94 V-2	clear
H-1313	27.8 - 28.6	30.9	11.5	3.2 max.	PC	UL94 V-2	clear
H-1314	34.9	38.1	11.5	3.2 max.	PC	UL94 V-2	clear
H-1316	38.1	41.2	11.5	3.2 max.	PC	UL94 V-2	clear
H-1318	44.5	47.6	11.5	3.2 max.	PC	UL94 V-2	clear
H-1319	50.8	54.8	11.5	3.2 max.	PC	UL94 V-2	clear