


## H-WP - Window "View Port" Plugs



**Dla pojedynczej grubości panelu**  
Single panel thickness design

**Dla wielu grubości panelu**  
Multiple panel thickness design

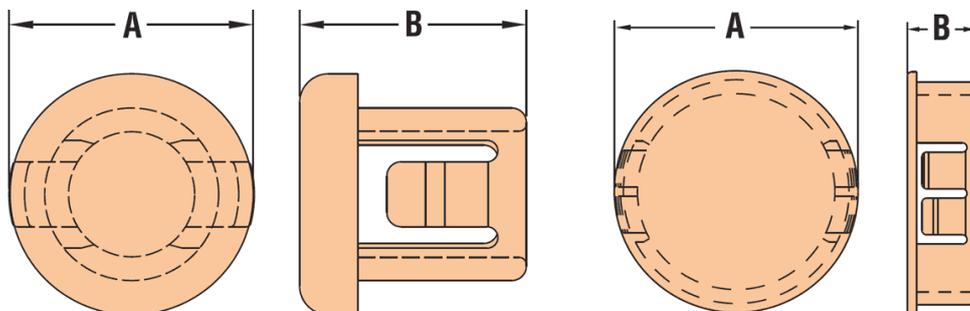

Details:

- **Material: Polycarbonate**
- **Flammability rating: UL94 V-2**
- **Colour: clear, other colours available on special order**
- Temperature Range: -40°C to 115°C
- Plugs for panel thickness 3.2 mm have multiple locking fingers for fractional thickness
- Molded of transparent polycarbonate for internal viewing or light transmission

Symbol	Mounting hole diameter range	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]						
H-1300	4.7	6.4	5.9	1.6 max.	PC	UL94 V-2	clear
H-1301	6.4	7.9	7.9	1.6 max.	PC	UL94 V-2	clear
H-1302	7.9	9.5	7.9	1.6 max.	PC	UL94 V-2	clear
H-1303	9.5	11.9	10.3	3.2 max.	PC	UL94 V-2	clear
H-1304	11.1	13.5	10.3	3.2 max.	PC	UL94 V-2	clear
H-1305	12.7	14.3	10.3	3.2 max.	PC	UL94 V-2	clear
H-1307	15.9	18.6	10.3	3.2 max.	PC	UL94 V-2	clear
H-1309	19.3	21.8	10.3	3.2 max.	PC	UL94 V-2	clear
H-1311	22.2	24.2	11.5	3.2 max.	PC	UL94 V-2	clear
H-1312	25.4	28.6	11.5	3.2 max.	PC	UL94 V-2	clear
H-1313	27.8 - 28.6	30.9	11.5	3.2 max.	PC	UL94 V-2	clear
H-1314	34.9	38.1	11.5	3.2 max.	PC	UL94 V-2	clear
H-1316	38.1	41.2	11.5	3.2 max.	PC	UL94 V-2	clear
H-1318	44.5	47.6	11.5	3.2 max.	PC	UL94 V-2	clear
H-1319	50.8	54.8	11.5	3.2 max.	PC	UL94 V-2	clear