


HLB-3 - Three cores cable breakout



Warstwa kleju:
A-50mm b-25mm

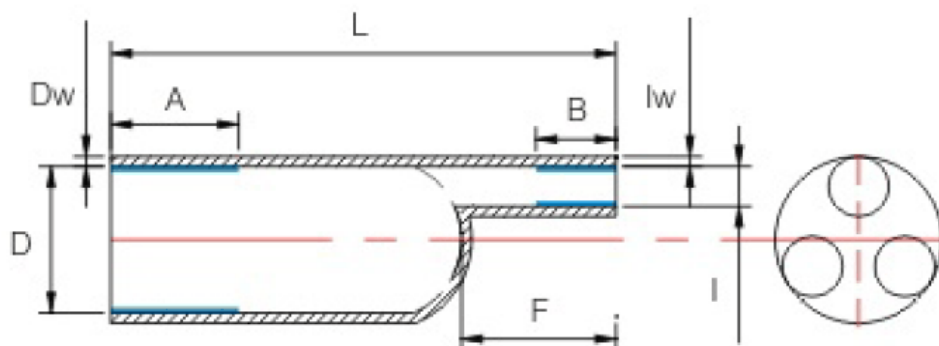

Details:

- **Material: Crosslinked polyolefin**
- **Color: black**
- **UV Resistant**
- **Min. shrink temperature: 110°C**
- **Min. full shrink temperature: 130°C**

Symbol	Min. diameter before shrink D	Min. diameter before shrink I	Max. diameter after shrink D	Max. diameter after shrink I	Length L $\pm 10\%$	F $\pm 10\%$	Wall thickness Dw $\pm 10\%$	Wall thickness lw $\pm 10\%$	A	B
	[mm]	[mm]	[mm]	[mm]	[m]	[mm]	[mm]	[mm]	[mm]	[mm]
HLB310-38-16	38	14	17	4.5	110	35	2.1	2.1	50	25
HLB320-60-25	60	25	25	8	165	50	3	2.5	50	25
HLB330-80-38	80	35	38	11	185	55	3.5	3.5	50	25
HLB340-110-50	110	46	50	17.5	250	65	4	4	50	25
HLB350-125-57	125	55	57	20	260	75	4	4	50	25
HLB360-140-70	140	62	70	26	280	75	4	4	50	25
HLB370-170-77	170	75	77	28	280	80	4	4	50	25
HLB310L-40-16L	40	15	16	4.5	125	35	2.1	2.1	50	25
HLB320L-60-24L	60	25	24	8	180	45	3.2	2.8	50	25
HLB330L-80-38L	80	35	38	11	215	57	4	4	50	25

Własności	Test	Wynik testu
Temperatura pracy	UL 224	-55°C do $\pm 110^\circ\text{C}$
Wytrzymałość	ASTM D 2671	>13MPa
Wydłużenie	ASTM D 2671	300%
Starzenie cieplne	158°C/168 hrs	>10MPa >250%
Wytrzymałość dielektryczna	IEC 243	>15kV/mm
Oporność skrośna	ASTM D 2671	>10 ¹³ Ωcm
Absorpcja wody (23°C / 14 dni)	ISO 62	<1% (max)