


HLB-4 - Four cores cable breakout



Warstwa kleju:
 A-50mm B-25mm

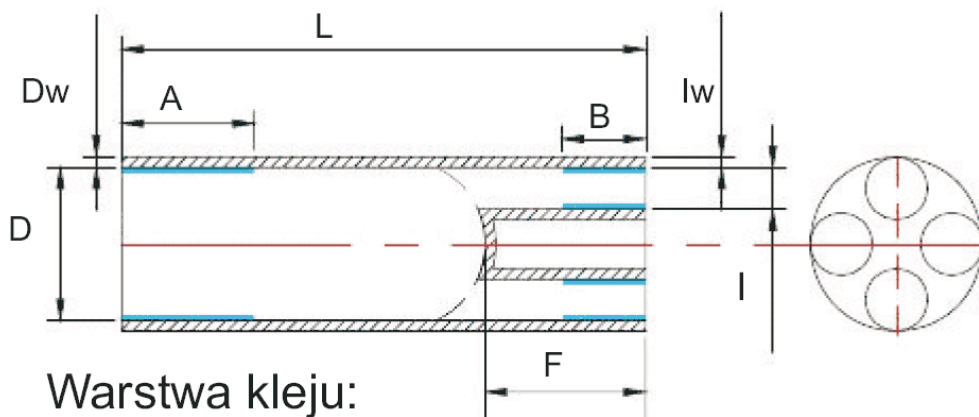

Details:

- **Material:** Crosslinked polyolefin
- **Color:** black
- **UV Resistant**
- **Min. shrink temperature:** 110°C
- **Min. full shrink temperature:** 130°C

Symbol	Min. diameter before shrink D	Min. diameter before shrink I	Max. diameter after shrink D	Max. diameter after shrink I	Length L ±10%	F ±10%	Wall thickness Dw ±10%	Wall thickness lw ±10%	A	B
	[mm]	[mm]	[mm]	[mm]	[m]	[mm]	[mm]	[mm]	[mm]	[mm]
HLB410-40-15	40	14	15	3.5	105	26	2.2	2	50	25
HLB420-55-21	55	20	21	5	150	40	3.1	2.6	50	25
HLB425-65-26	65	26	26	7	175	45	3.3	2.9	50	25
HLB430-75-26	75	28	26	7	175	45	3.3	2.9	50	25
HLB440-82-37	82	30	37	9	190	60	4	3	50	25
HLB445-90-37	90	32	37	9	190	60	4	3	50	25
HLB450-100-47	100	38	47	12	198	58	4	3	50	25
HLB460-125-52	125	52	52	15	240	75	4	4	50	25
HLB470-160-70	160	64	70	19	260	75	4	4	50	25

Własności	Test	Wynik testu
Temperatura pracy	UL 224	-55°C do ±110°C
Wytrzymałość	ASTM D 2671	>13MPa
Wydłużenie	ASTM D 2671	300%
Starzenie cieplne	158°C/168 hrs	>10MPa >250%
Wytrzymałość dielektryczna	IEC 243	>15kV/mm
Oporność skośna	ASTM D 2671	>10 ⁻¹³ Ωcm
Absorbpcja wody (23°C / 14 dni)	ISO 62	<1% (max)