


HLB-5 - Five cores cable breakout

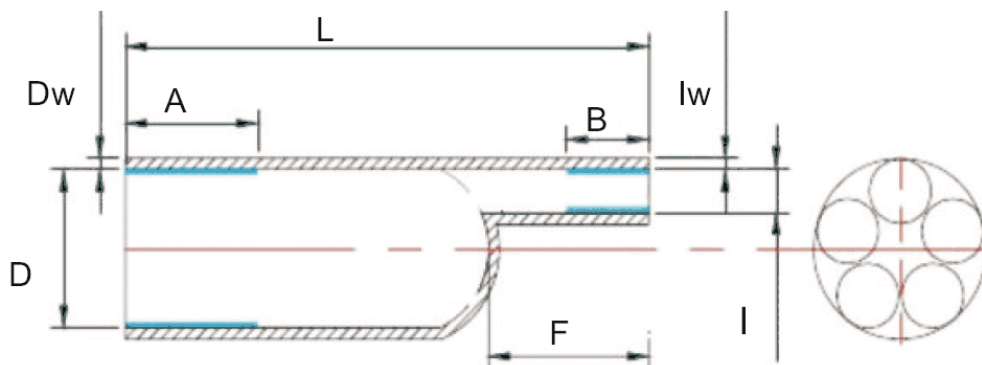

Warstwa kleju:
 A-50mm B-25mm

Details:

- **Material:** Crosslinked polyolefin
- **Color:** black
- **UV Resistant**
- **Min. shrink temperature:** 110°C
- **Min. full shrink temperature:** 130°C

Symbol	Min. diameter before shrink D	Min. diameter before shrink I	Max. diameter after shrink D	Max. diameter after shrink I	Length L $\pm 10\%$	F $\pm 10\%$	Wall thickness Dw $\pm 10\%$	Wall thickness lw $\pm 10\%$	A	B
	[mm]	[mm]	[mm]	[mm]	[m]	[mm]	[mm]	[mm]	[mm]	[mm]
HLB510-40-19	40	13	19	4	98	25	2.5	2	50	25
HLB520-55-24	55	18	24	5	155	40	3.2	2.6	50	25
HLB530-80-33	80	26	33	8	175	53	3	2.8	50	25
HLB540-100-42	100	34	42	10	190	60	3	3	50	25

Własności	Test	Wynik testu
Temperatura pracy	UL 224	-55°C do $\pm 110^\circ\text{C}$
Wytrzymałość	ASTM D 2671	>13MPa
Wydłużenie	ASTM D 2671	300%
Starzenie cieplne	158°C/168 hrs	>10MPa >250%
Wytrzymałość dielektryczna	IEC 243	>15kV/mm
Oporność skośna	ASTM D 2671	>10 ¹³ Ωcm
Absorbcja wody (23°C / 14 dni)	ISO 62	<1% (max)