

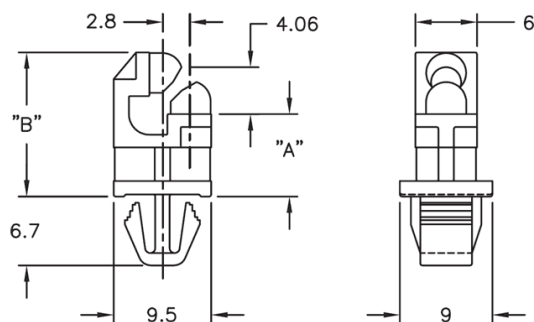



HLCBSE2 - Hinged Locking Circuit Board Support System



Top Hole: $\varnothing 4$
Panel Thickness: 1.6



Bottom Hole: See Above
Panel Thickness: 1.2 - 1.8

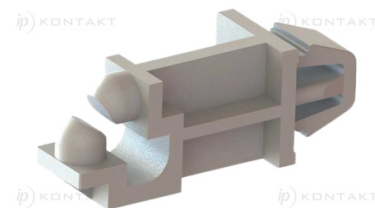

Details:

- **Material: Nylon 6/6, UL 94 V-2, RMS-01***
- **Material: Nylon 6/6, UL 94 V-0, RMS-19***
- **Colour: natural**
- **Standard pack: 1000 pcs**

Symbol	Height A	B	Top mounting hole dia. ± 0.08	Top panel thickness	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
HLCBSE2-4M-01	4	10	4	1.6	1.2 - 1.8	PA 66	UL94 V-2	natural
HLCBSE2-4M-19	4	10	4	1.6	1.2 - 1.8	PA 66	UL94 V-0	natural
HLCBSE2-6M-01	6	12	4	1.6	1.2 - 1.8	PA 66	UL94 V-2	natural
HLCBSE2-6M-19	6	12	4	1.6	1.2 - 1.8	PA 66	UL94 V-0	natural
HLCBSE2-8M-01	8	14	4	1.6	1.2 - 1.8	PA 66	UL94 V-2	natural
HLCBSE2-8M-19	8	14	4	1.6	1.2 - 1.8	PA 66	UL94 V-0	natural
HLCBSE2-10M-01	10	16	4	1.6	1.2 - 1.8	PA 66	UL94 V-2	natural
HLCBSE2-10M-19	10	16	4	1.6	1.2 - 1.8	PA 66	UL94 V-0	natural
HLCBSE2-12M-01	12	18	4	1.6	1.2 - 1.8	PA 66	UL94 V-2	natural
HLCBSE2-12M-19	12	18	4	1.6	1.2 - 1.8	PA 66	UL94 V-0	natural
HLCBSE2-14M-01	14	20	4	1.6	1.2 - 1.8	PA 66	UL94 V-2	natural
HLCBSE2-14M-19	14	20	4	1.6	1.2 - 1.8	PA 66	UL94 V-0	natural
HLCBSE2-25M-01	25	31	4	1.6	1.2 - 1.8	PA 66	UL94 V-2	natural
HLCBSE2-25M-19	25	31	4	1.6	1.2 - 1.8	PA 66	UL94 V-0	natural
HLCBSE2-30M-01	30	36	4	1.6	1.2 - 1.8	PA 66	UL94 V-2	natural
HLCBSE2-30M-19	30	36	4	1.6	1.2 - 1.8	PA 66	UL94 V-0	natural