



HW - Harness Wrap

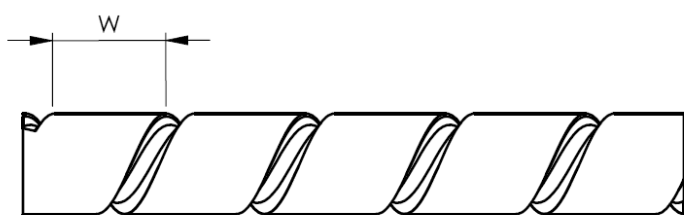

Details:

- **Material:** PE, RMS-409*
- **Colour:** natural (NAT), czarny (BLK)
- **Operating temperature:** from -50°C to 85°C
- **Standard Pack:** see table

Symbol	Ext. diameter ØOD	Int. diameter ØID	Wall thickness	Cable diameter range	W	Material	Color	Length
	[mm]	[mm]	[mm]	[mm]	[mm]			[m]
HW-3.5-5-PE	3.5	2.3	0.6	2.0 - 15.0	5	LDPE	natural	10
HW-3.5-5-PE-BK	3.5	2.3	0.6	2.0 - 15.0	5	LDPE	black	10
HW-5-7-PE	5	3.7	0.65	4.0 - 20.0	7	LDPE	natural	10
HW-5-7-PE-BK	5	3.7	0.65	4.0 - 20.0	7	LDPE	black	10
HW-8-10-PE	8	6.5	0.75	7.0 - 40.0	10	LDPE	natural	10
HW-8-10-PE-BK	8	6.5	0.75	7.0 - 40.0	10	LDPE	black	10
HW-10-12-PE	10	8.2	0.9	12.0 - 50.0	12	LDPE	natural	10
HW-10-12-PE-BK	10	8.2	0.9	12.0 - 50.0	12	LDPE	black	10
HW-12-14-PE	12	10	1	13.0 - 70.0	14	LDPE	natural	10
HW-12-14-PE-BK	12	10	1	13.0 - 70.0	14	LDPE	black	10
HW-14-16-PE	14	12	1	15.0 - 80.0	16	LDPE	natural	10
HW-14-16-PE-BK	14	12	1	15.0 - 80.0	16	LDPE	black	10
HW-20-22-PE	20	17.6	1.2	20.0 - 120.0	22	LDPE	natural	10
HW-20-22-PE-BK	20	17.6	1.2	20.0 - 120.0	22	LDPE	black	10
HW-25-27-PE	25	22.2	1.4	25.0 - 150.0	27	LDPE	natural	10
HW-25-27-PE-BK	25	22.2	1.4	25.0 - 150.0	27	LDPE	black	10