


KL - Kurly Lock

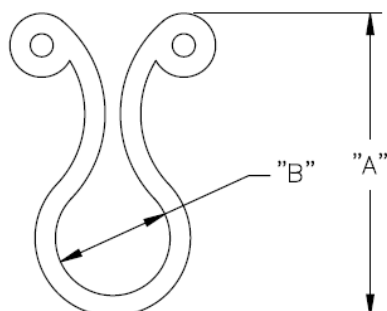

Details:

- **Other colors available on special order**
- **Maximum load: 9 kg**
- **MOQ: 1000 pcs**

Symbol	A	Cable diameter range B	Material	Flammability	Color
	[mm]	[mm]			
KL-125	12.2	3.2 - 3.8	PA 66	UL94 V-2	natural
KL-125-19	12.2	3.2 - 3.8	PA 66	UL94 V-0	natural
KL-200	20.8	4.1 - 6.1	PA 66	UL94 V-2	natural
KL-200-19	20.8	4.1 - 6.1	PA 66	UL94 V-0	natural
KL-250	23	5.1 - 7.6	PA 66	UL94 V-2	natural
KL-250-19	23	5.1 - 7.6	PA 66	UL94 V-0	natural
KL-350	26.2	7.6 - 10.2	PA 66	UL94 V-2	natural
KL-350-19	26.2	7.6 - 10.2	PA 66	UL94 V-0	natural
KL-450	30.5	10.2 - 12.7	PA 66	UL94 V-2	natural
KL-450-19	30.5	10.2 - 12.7	PA 66	UL94 V-0	natural
KL-600	31.8	14.0 - 16.5	PA 66	UL94 V-2	natural
KL-600-19	31.8	14.0 - 16.5	PA 66	UL94 V-0	natural
KL-750	38.6	17.8 - 20.3	PA 66	UL94 V-2	natural
KL-750-19	38.6	17.8 - 20.3	PA 66	UL94 V-0	natural
KL-950	44.5	22.9 - 25.4	PA 66	UL94 V-2	natural
KL-900-19	44.5	22.9 - 25.4	PA 66	UL94 V-0	natural