


LCBS-TF - Circuit Board Support

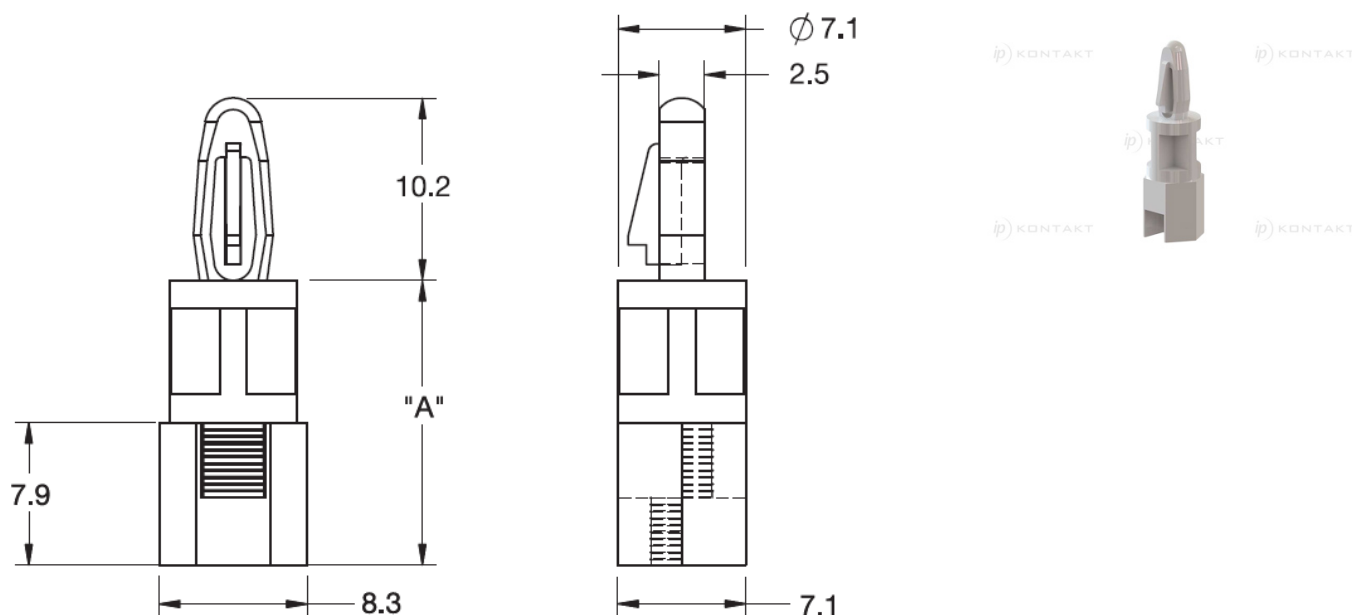

Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19*
- **Color:** natural
- Top hole: 4 ± 0.08 , panel thickness: 1.57
- Thread: UNC 6-32 or M4
- **Standard pack:** 1000 pcs

Symbol	Height A ± 0.4	Int. thread	Top mounting hole dia. ± 0.08	Top panel thickness	Material	Flammability	Color
	[mm]		[mm]	[mm]			
LCBS-TF-M4-6-01	9.5	M4	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-M4-6-19	9.5	M4	4	1.57	PA 66	UL94 V-0	natural
LCBS-TF-M4-8-01	12.7	M4	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-M4-8-19	12.7	M4	4	1.57	PA 66	UL94 V-0	natural
LCBS-TF-M4-10-01	15.9	M4	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-M4-10-19	15.9	M4	4	1.57	PA 66	UL94 V-0	natural
LCBS-TF-M4-12-01	19.1	M4	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-M4-12-19	19.1	M4	4	1.57	PA 66	UL94 V-0	natural
LCBS-TF-M4-14-01	22.2	M4	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-M4-14-19	22.2	M4	4	1.57	PA 66	UL94 V-0	natural
LCBS-TF-M4-16-01	25.4	M4	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-M4-16-19	25.4	M4	4	1.57	PA 66	UL94 V-0	natural
LCBS-TF-6-01	9.5	UNC 6-32	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-6-19	9.5	UNC 6-32	4	1.57	PA 66	UL94 V-0	natural
LCBS-TF-8-01	12.7	UNC 6-32	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-8-19	12.7	UNC 6-32	4	1.57	PA 66	UL94 V-0	natural
LCBS-TF-10-01	15.9	UNC 6-32	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-10-19	15.9	UNC 6-32	4	1.57	PA 66	UL94 V-0	natural
LCBS-TF-12-01	19.1	UNC 6-32	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-12-19	19.1	UNC 6-32	4	1.57	PA 66	UL94 V-0	natural
LCBS-TF-14-01	22.2	UNC 6-32	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-14-19	22.2	UNC 6-32	4	1.57	PA 66	UL94 V-0	natural

Symbol	Height A ± 0.4	Int. thread	Top mounting hole dia. ± 0.08	Top panel thickness	Material	Flammability	Color
	[mm]		[mm]	[mm]			
LCBS-TF-16-01	25.4	UNC 6-32	4	1.57	PA 66	UL94 V-2	natural
LCBS-TF-16-19	25.4	UNC 6-32	4	1.57	PA 66	UL94 V-0	natural