
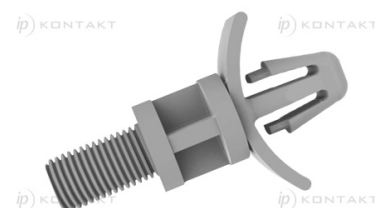


LCCBS-TM - Threaded Circuit Board Support

Otwór górny: zatrzask $\varnothing 4.7 \pm 0.08$

Grubość panelu: 1.57

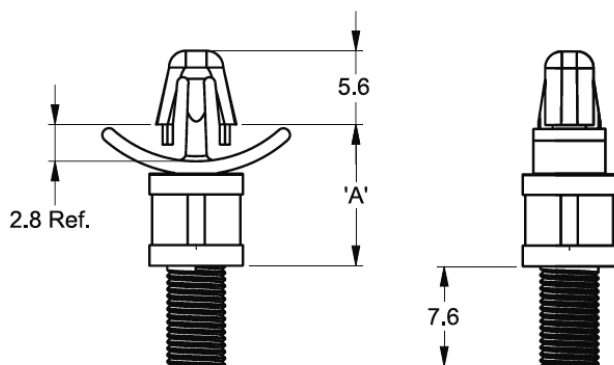

Otwór dolny: patrz tabela

Details:

- **Material:** UL94 V-2 Nylon 6/6, RMS-01*
- **Color:** Natural
- **Standard Pack:** 1000/Bag

Symbol	Height A	Top mounting hole dia. ± 0.08	Top panel thickness	Ext. thread	Ext. thread length	Material	Flammability	Color
	[mm]	[mm]	[mm]		[mm]			
LCCBSM-M4-6-01	10.7	4.7	1.57	M4	7.6	PA 66	UL94 V-2	natural
LCCBSM-M4-8-01	13.9	4.7	1.57	M4	7.6	PA 66	UL94 V-2	natural
LCCBSM-M4-10-01	17.1	4.7	1.57	M4	7.6	PA 66	UL94 V-2	natural
LCCBSM-M4-12-01	20.2	4.7	1.57	M4	7.6	PA 66	UL94 V-2	natural
LCCBSM-M4-14-01	23.4	4.7	1.57	M4	7.6	PA 66	UL94 V-2	natural
LCCBSM-M4-16-01	26.6	4.7	1.57	M4	7.6	PA 66	UL94 V-2	natural
LCCBS-TM-6-01	10.7	4.7	1.57	#6-32	7.6	PA 66	UL94 V-2	natural
LCCBS-TM-8-01	13.9	4.7	1.57	#6-32	7.6	PA 66	UL94 V-2	natural
LCCBS-TM-10-01	17.1	4.7	1.57	#6-32	7.6	PA 66	UL94 V-2	natural
LCCBS-TM-12-01	20.2	4.7	1.57	#6-32	7.6	PA 66	UL94 V-2	natural
LCCBS-TM-14-01	23.4	4.7	1.57	#6-32	7.6	PA 66	UL94 V-2	natural
LCCBS-TM-16-01	26.6	4.7	1.57	#6-32	7.6	PA 66	UL94 V-2	natural