
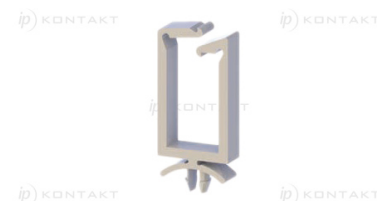


LWS - Locking Wire Saddle

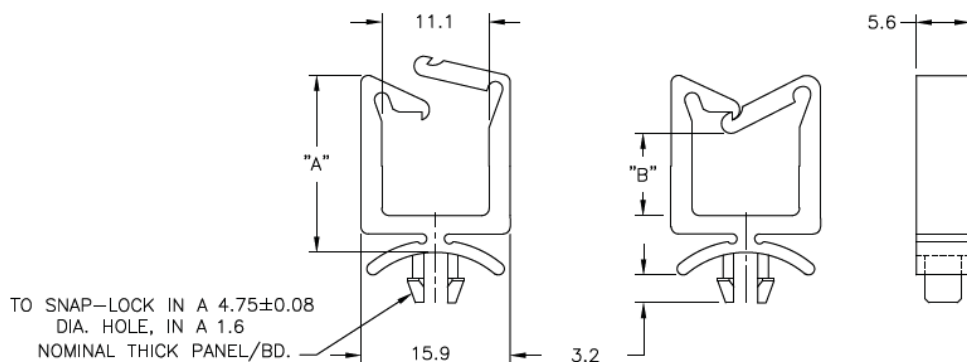

Details:

- **Material:** UL94 V2 Nylon 6/6, RMS-01* or UL94 V0 Nylon 6/6, RMS-19*
- **Color:** Natural
- Mounting hole: 4.75 mm
- Panel thickness: 1.6 mm
- Standard pack: 1000 pcs

Symbol	A	B	Material	Flammability	Color
	[mm]	[mm]			
LWS-1-01	13	3.6	PA 66	UL94 V-2	natural
LWS-1-19	13	3.6	PA 66	UL94 V-0	natural
LWS-2-01	18	8.6	PA 66	UL94 V-2	natural
LWS-2-19	18	8.6	PA 66	UL94 V-0	natural
LWS-3-01	27.2	18.3	PA 66	UL94 V-2	natural
LWS-3-19	27.2	18.3	PA 66	UL94 V-0	natural
LWS-4-01	35.1	25.9	PA 66	UL94 V-2	natural
LWS-4-19	35.1	25.9	PA 66	UL94 V-0	natural