





LWS-SR - Locking Wire Saddle

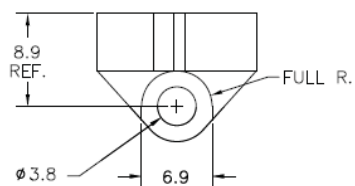

Details:

- **Material: Nylon 6/6, RMS-01***
- **Material: UL94 V0 Nylon 6/6, RMS-19***
- **Color: Natural**
- **Standard Pack: 1000/Bag**

Symbol	A	B	Mounting hole diameter range	Material	Flammability	Color
	[mm]	[mm]	[mm]			
LWS-SR-1-01	11.4	3.6	3.6 - 3.7	PA 66	UL94 V-2	natural
LWS-SR-2-01	16.3	8.6	3.6 - 3.7	PA 66	UL94 V-2	natural
LWS-SR-3-01	25.4	18.3	3.6 - 3.7	PA 66	UL94 V-2	natural
LWS-SR-4-01	33.3	25.4	3.6 - 3.7	PA 66	UL94 V-2	natural

Rivets:

Part No.	Grubość panelu
	[mm]
SR-3535	0.3 - 1.2
SR-3545	1.2 - 2.1
SR-3550	1.8 - 2.7
SR-3555	2.1 - 3.0
SR-3560	2.8 - 3.7
SR-3570	3.6 - 4.6
SR-3580	4.6 - 5.6