


M-SG - Tapered Rubber Fixed Foot

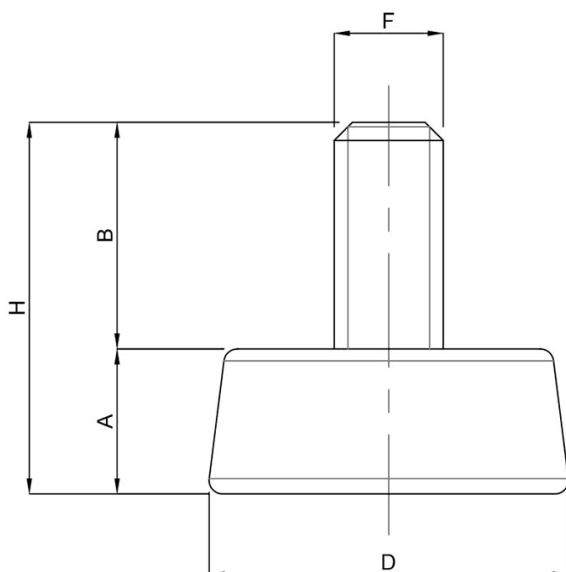

Details:

- **Base material: NBR, 70 Shore**
- **Stud material: steel or stainless steel 1.4301**
- Load values have to be considered referring to static conditions calculated at the half of the screw length. In conditions of vibrations or in presence of dynamic loads these values should be reduced.

Symbol	Stud length B	Base diameter D	Metric thread F	Base height A	Height H	Stud material	Max. load (static)
	[mm]	[mm]		[mm]	[mm]		[N]
M-SG-ST-M8-25	25	40	M8	16	41	steel	1800
M-SG-SS-M8-25	25	40	M8	16	41	stainless steel	1800
M-SG-ST-M10-25	25	40	M10	16	41	steel	2250
M-SG-SS-M10-25	25	40	M10	16	41	stainless steel	2250
M-SG-ST-M12-25	25	40	M12	16	41	steel	3150
M-SG-SS-M12-25	25	40	M12	16	41	stainless steel	3150