


M-STP - Tapered polyamide feet

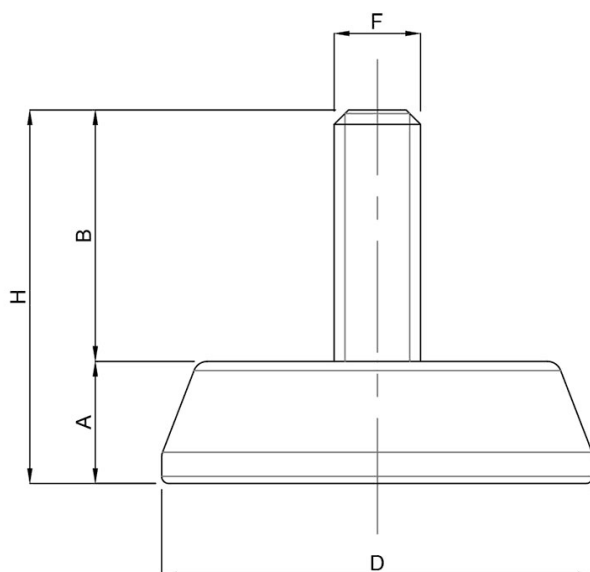

Details:

- **Base material: Polyamide**
- **Screw material: galvanized steel**
- Load values have to be considered referring to static conditions calculated at the half of the screw length. In conditions of vibrations or in presence of dynamic loads these values should be reduced.

Symbol	Stud length B	Base diameter D	Metric thread F	Base height A	Height H	Max. load (static)
	[mm]	[mm]		[mm]	[mm]	[N]
M-STP-M8-30	20	30	M8	11.5	31.5	2000
M-STP-M10-30	20	30	M10	11.5	31.5	2000
M-STP-M8-40	25	40	M8	14.5	39.5	2500
M-STP-M10-40	25	40	M10	14.5	39.5	2500
M-STP-M10-50	35	50	M10	17	52	3500
M-STP-M12-50	35	50	M12	17	52	3500
M-STP-M12-60	35	60	M12	17	52	4000