


MSCBSM - Studded Circuit Board Support Mini

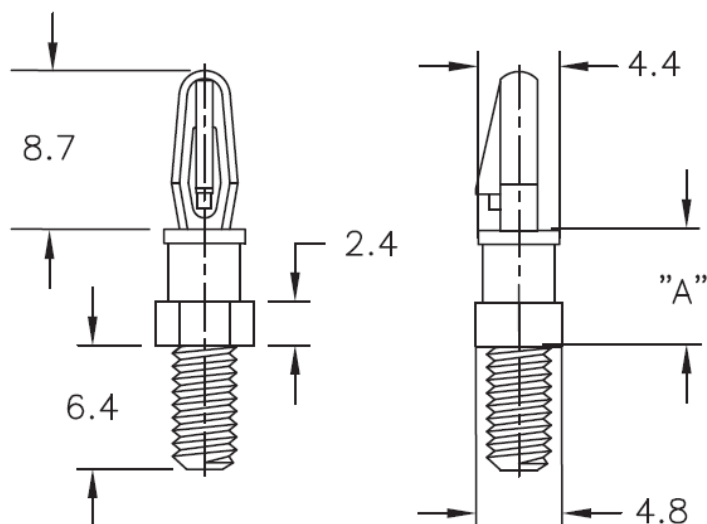

Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19*
- **Color:** natural
- **Standard pack:** 1000 pcs

Symbol	Height A ±0.4	Ext. thread	Ext. thread length	Top mounting hole dia. ±0.05	Top panel thickness	Material	Flammability	Color
	[mm]							
MSCBSM-M3-2-01	3.2	M3	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M3-2-19	3.2	M3	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M3-3-01	4.8	M3	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M3-3-19	4.8	M3	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M3-4-01	6.4	M3	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M3-4-19	6.4	M3	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M3-5-01	7.9	M3	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M3-5-19	7.9	M3	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M3-6-01	9.5	M3	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M3-6-19	9.5	M3	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M3-7-01	11.1	M3	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M3-7-19	11.1	M3	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M3-8-01	12.7	M3	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M3-8-19	12.7	M3	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M3-9-01	14.3	M3	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M3-9-19	14.3	M3	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M3-10-01	15.9	M3	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M3-10-19	15.9	M3	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M4-2-01	3.2	M4	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M4-2-19	3.2	M4	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M4-3-01	4.8	M4	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M4-3-19	4.8	M4	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M4-4-01	6.4	M4	6.4	3.18	1.57	PA 66	UL94 V-2	natural

Symbol	Height A ±0.4	Ext. thread	Ext. thread length	Top mounting hole dia. ±0.05	Top panel thickness	Material	Flammability	Color
	[mm]		[mm]	[mm]	[mm]			
MSCBSM-M4-4-19	6.4	M4	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M4-5-01	7.9	M4	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M4-5-19	7.9	M4	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M4-6-01	9.5	M4	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M4-6-19	9.5	M4	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M4-7-01	11.1	M4	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M4-7-19	11.1	M4	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M4-8-01	12.7	M4	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M4-8-19	12.7	M4	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M4-9-01	14.3	M4	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M4-9-19	14.3	M4	6.4	3.18	1.57	PA 66	UL94 V-0	natural
MSCBSM-M4-10-01	15.9	M4	6.4	3.18	1.57	PA 66	UL94 V-2	natural
MSCBSM-M4-10-19	15.9	M4	6.4	3.18	1.57	PA 66	UL94 V-0	natural