


MSCBST - Miniature Threaded Circuit Board Support

Otwór górny: $\varnothing 2.5 \pm 0.05$
 Grubość panelu: 1.6 ± 0.2

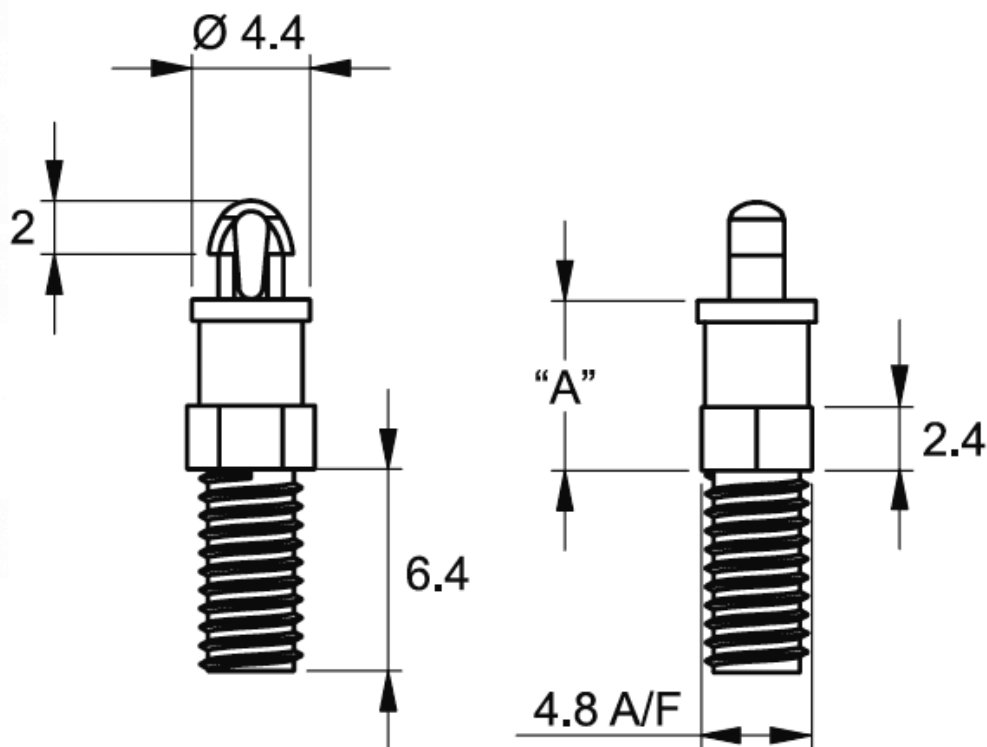

Otwór dolny: patrz tabela

Details:

- **Material:** UL94 V-2 Nylon 6/6, RMS-01*
- **Color:** Natural
- **Standard Pack:** 1000/Bag

Symbol	Height A	Top mounting hole dia. ± 0.05	Top panel thickness ± 0.2	Wrench size A/F	Ext. thread	Ext. thread length	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]		[mm]			
MSCBST-M3-2-01	3.2	2.5	1.6	4.8	M3	6.4	PA 66	UL94 V-2	natural
MSCBST-M3-3-01	4.8	2.5	1.6	4.8	M3	6.4	PA 66	UL94 V-2	natural
MSCBST-M3-4-01	6.4	2.5	1.6	4.8	M3	6.4	PA 66	UL94 V-2	natural
MSCBST-M3-5-01	7.9	2.5	1.6	4.8	M3	6.4	PA 66	UL94 V-2	natural
MSCBST-M3-6-01	9.5	2.5	1.6	4.8	M3	6.4	PA 66	UL94 V-2	natural
MSCBST-M3-7-01	11.1	2.5	1.6	4.8	M3	6.4	PA 66	UL94 V-2	natural
MSCBST-M3-8-01	12.7	2.5	1.6	4.8	M3	6.4	PA 66	UL94 V-2	natural
MSCBST-M3-9-01	14.3	2.5	1.6	4.8	M3	6.4	PA 66	UL94 V-2	natural
MSCBST-M3-10-01	15.9	2.5	1.6	4.8	M3	6.4	PA 66	UL94 V-2	natural

Symbol	Height A	Top mounting hole dia. ±0.05	Top panel thickness ±0.2	Wrench size A/F	Ext. thread	Ext. thread length	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]		[mm]			
MSCBST-M4-2-01	3.2	2.5	1.6	4.8	M4	6.4	PA 66	UL94 V-2	natural
MSCBST-M4-3-01	4.8	2.5	1.6	4.8	M4	6.4	PA 66	UL94 V-2	natural
MSCBST-M4-4-01	6.4	2.5	1.6	4.8	M4	6.4	PA 66	UL94 V-2	natural
MSCBST-M4-5-01	7.9	2.5	1.6	4.8	M4	6.4	PA 66	UL94 V-2	natural
MSCBST-M4-6-01	9.5	2.5	1.6	4.8	M4	6.4	PA 66	UL94 V-2	natural
MSCBST-M4-7-01	11.1	2.5	1.6	4.8	M4	6.4	PA 66	UL94 V-2	natural
MSCBST-M4-8-01	12.7	2.5	1.6	4.8	M4	6.4	PA 66	UL94 V-2	natural
MSCBST-M4-9-01	14.3	2.5	1.6	4.8	M4	6.4	PA 66	UL94 V-2	natural
MSCBST-M4-10-01	15.9	2.5	1.6	4.8	M4	6.4	PA 66	UL94 V-2	natural