
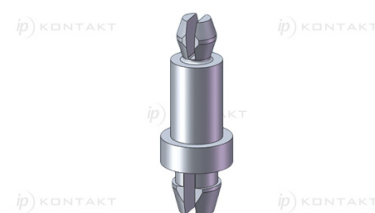


MSPE - Support Post

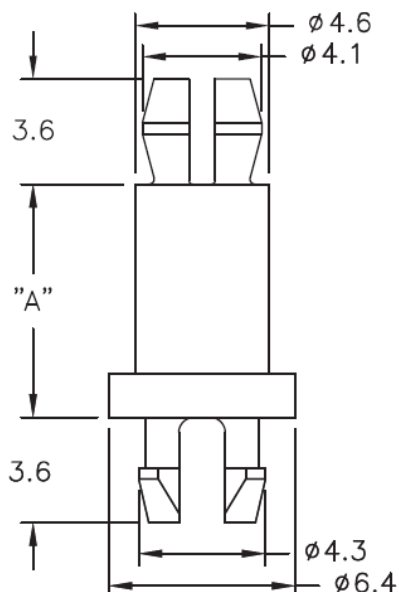

Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19*
- **Color:** natural
- **Standard pack:** 1000 pcs

Symbol	Height A ±0.4	Top mounting hole dia. ±0.05	Top panel thickness	Bottom mounting hole dia. ±0.05	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
MSPE-2-01	3.2	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-2-19	3.2	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-3-01	4.8	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-3-19	4.8	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-4-01	6.4	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-4-19	6.4	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-5-01	7.9	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-5-19	7.9	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-6-01	9.5	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-6-19	9.5	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-7-01	11.1	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-7-19	11.1	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-8-01	12.7	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-8-19	12.7	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-10-01	15.9	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-10-19	15.9	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-11-01	17.5	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-11-19	17.5	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-12-01	19.1	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-12-19	19.1	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-14-01	22.2	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-14-19	22.2	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-16-01	25.4	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural

Symbol	Height A ± 0.4	Top mounting hole dia. ± 0.05	Top panel thickness	Bottom mounting hole dia. ± 0.05	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
MSPE-16-19	25.4	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-20-01	31.8	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-20-19	31.8	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural
MSPE-22-01	34.9	3.9	1.57	3.9	1.57	PA 66	UL94 V-2	natural
MSPE-22-19	34.9	3.9	1.57	3.9	1.57	PA 66	UL94 V-0	natural