


## MSPMST - Mini Support Post Micro Self-Threading

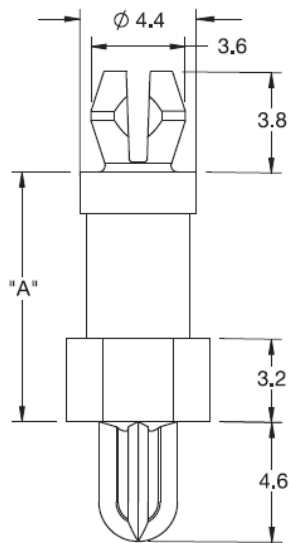

### Details:

- **Material: Nylon 6/6, UL 94 V-2, RMS-01\***
- **Color: natural**
- Top Hole: Snap-fit:  $3.18 \pm 0.05$  mm
- Panel Thickness: 1.57 mm
- **Bottom Hole: Self-Thread into a #4 or M3 Threaded Hole or Nut**
- **Standard pack: 1000 pcs**

Symbol	Height A $\pm 0.4$	Top mounting hole dia. $\pm 0.08$	Top panel thickness	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
MSPMST-2-01	3.2	3.18	1.57	min. 1.6	PA 66	UL94 V-2	natural
MSPMST-3-01	4.8	3.18	1.57	min. 1.6	PA 66	UL94 V-2	natural
MSPMST-4-01	6.4	3.18	1.57	min. 1.6	PA 66	UL94 V-2	natural
MSPMST-5-01	7.9	3.18	1.57	min. 1.6	PA 66	UL94 V-2	natural
MSPMST-6-01	9.5	3.18	1.57	min. 1.6	PA 66	UL94 V-2	natural
MSPMST-7-01	11.1	3.18	1.57	min. 1.6	PA 66	UL94 V-2	natural
MSPMST-8-01	12.7	3.18	1.57	min. 1.6	PA 66	UL94 V-2	natural
MSPMST-9-01	14.3	3.18	1.57	min. 1.6	PA 66	UL94 V-2	natural
MSPMST-10-01	15.9	3.18	1.57	min. 1.6	PA 66	UL94 V-2	natural