


MSPT - Support Post

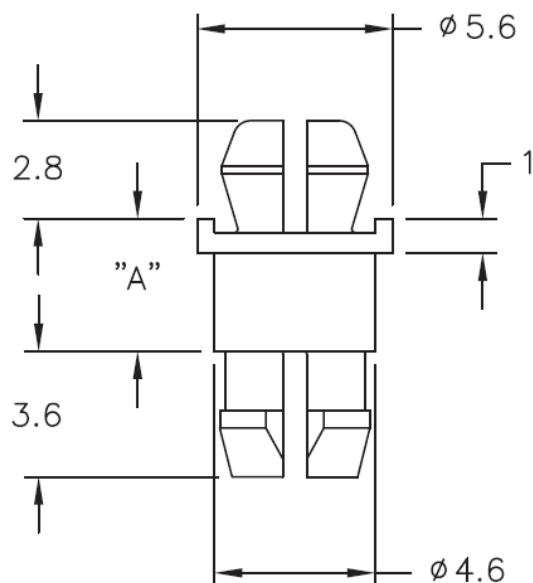

Details:

- **Material:** UL94 V-2 Nylon 6/6, RMS-01*
- **Material:** UL94 V-0 Nylon 6/6, RMS-19*
- **Color:** Natural
- **Standard Pack:** 1000/Bag

Symbol	Height A ±0.4	Top mounting hole dia. ±0.05	Top panel thickness	Bottom mounting hole dia. ±0.05	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
MSPT-3-01	4.8	3.9	1.2	3.9	1.6	PA 66	UL94 V-2	natural
MSPT-3-19	4.8	3.9	1.2	3.9	1.6	PA 66	UL94 V-0	natural
MSPT-4-01	6.4	3.9	1.2	3.9	1.6	PA 66	UL94 V-2	natural
MSPT-4-19	6.4	3.9	1.2	3.9	1.6	PA 66	UL94 V-0	natural
MSPT-5-01	7.9	3.9	1.2	3.9	1.6	PA 66	UL94 V-2	natural
MSPT-5-19	7.9	3.9	1.2	3.9	1.6	PA 66	UL94 V-0	natural
MSPT-6-01	9.5	3.9	1.2	3.9	1.6	PA 66	UL94 V-2	natural
MSPT-6-19	9.5	3.9	1.2	3.9	1.6	PA 66	UL94 V-0	natural
MSPT-7-01	11.1	3.9	1.2	3.9	1.6	PA 66	UL94 V-2	natural
MSPT-7-19	11.1	3.9	1.2	3.9	1.6	PA 66	UL94 V-0	natural
MSPT-8-01	12.7	3.9	1.2	3.9	1.6	PA 66	UL94 V-2	natural
MSPT-8-19	12.7	3.9	1.2	3.9	1.6	PA 66	UL94 V-0	natural
MSPT-10-01	15.9	3.9	1.2	3.9	1.6	PA 66	UL94 V-2	natural
MSPT-10-19	15.9	3.9	1.2	3.9	1.6	PA 66	UL94 V-0	natural
MSPT-11-01	17.5	3.9	1.2	3.9	1.6	PA 66	UL94 V-2	natural
MSPT-11-19	17.5	3.9	1.2	3.9	1.6	PA 66	UL94 V-0	natural
MSPT-12-01	19.1	3.9	1.2	3.9	1.6	PA 66	UL94 V-2	natural
MSPT-12-19	19.1	3.9	1.2	3.9	1.6	PA 66	UL94 V-0	natural
MSPT-14-01	22.2	3.9	1.2	3.9	1.6	PA 66	UL94 V-2	natural
MSPT-14-19	22.2	3.9	1.2	3.9	1.6	PA 66	UL94 V-0	natural