

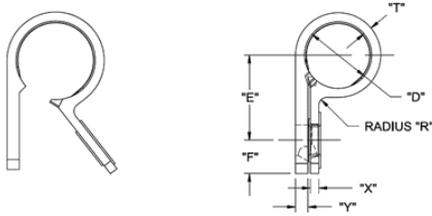





NM - Heavy Duty Loop Clamp

Rys. 1
Seria R - żebrowana



Rys. 2
Seria F - płaska

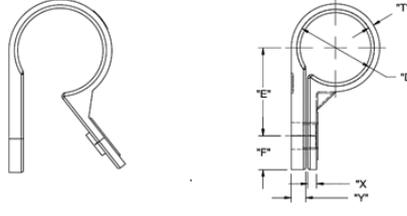

Details:

- **Material:** UL94 V2 Heat Stabilized Nylon, RMS-164* Conforms to MIL-M-20693/ASTM D-4066
- **Eyelet:** Aluminum, RMS-82* Anodized in accordance with MIL-A-8625
- **Color:** Natural
- **Standard pack:** see table

Symbol	Symbol MS	Max. cable bundle diameter D	E	F	R	T	W	X	Y	Mounting	Fig.	Material	Flammability	Color
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]					
NM-3-R3	MS25281-R3	4.8	12.3	6.4	1.57	1.4	12.8	1.7	2	M5 screw	1	PA 66	UL94 V-2	light grey
NM-4-R4	MS25281-R4	6.4	13	6.4	1.57	1.4	12.8	1.7	2	M5 screw	1	PA 66	UL94 V-2	light grey
NM-5-R5	MS25281-R5	7.9	13.9	6.4	1.57	1.4	12.8	1.7	2.4	M5 screw	1	PA 66	UL94 V-2	light grey
NM-6-R6	MS25281-R6	9.5	14.7	6.4	1.57	1.7	12.8	1.7	2.4	M5 screw	1	PA 66	UL94 V-2	light grey
NM-7-R7	MS25281-R7	11.1	15.4	6.4	1.57	1.7	12.8	1.7	2.4	M5 screw	1	PA 66	UL94 V-2	light grey
NM-8-R8	MS25281-R8	12.7	16.2	6.4	1.57	1.7	12.8	1.7	2.4	M5 screw	1	PA 66	UL94 V-2	light grey
NM-10-R10	MS25281-R10	15.9	17.9	7.2	1.57	1.7	12.8	1.7	2.74	M5 screw	1	PA 66	UL94 V-2	light grey
NM-11-R11	MS25281-R11	17.5	19.9	7.2	1.57	1.7	12.8	1.7	2.74	M5 screw	1	PA 66	UL94 V-2	light grey
NM-12-R12	MS25281-R12	19.1	20.7	7.2	2.77	1.7	12.8	1.7	2.74	M5 screw	1	PA 66	UL94 V-2	light grey
NM-13-R13	MS25281-R13	20.6	21	7.2	2.77	1.7	12.8	1.7	2.74	M5 screw	1	PA 66	UL94 V-2	light grey
NM-14-R14	MS25281-R14	22.2	22.3	7.2	2.77	1.7	12.8	1.7	2.74	M5 screw	1	PA 66	UL94 V-2	light grey
NM-16-R16	MS25281-R16	25.4	23.9	7.2	2.77	1.7	12.8	1.7	2.74	M5 screw	1	PA 66	UL94 V-2	light grey
NM-18-R18	MS25281-R18	28.6	25	7.2	2.77	1.7	12.8	1.7	2.74	M5 screw	1	PA 66	UL94 V-2	light grey

Symbol	Symbol MS	Max. cable bundle diameter D	E	F	R	T	W	X	Y	Mounting	Fig.	Material	Flammability	Color
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]					
NM-20-R20	MS25281-R20	31.75	27.1	7.2	2.77	3	14.05	2.3	3.2	M5 screw	1	PA 66	UL94 V-2	light grey
NM-22-R22	MS25281-R22	34.9	28.2	7.2	2.77	3	14.05	2.3	3.2	M5 screw	1	PA 66	UL94 V-2	light grey
NM-24-R24	MS25281-R24	38.1	29.7	7.2	2.77	3	14.05	2.3	3.2	M5 screw	1	PA 66	UL94 V-2	light grey
NM-26-R26	MS25281-R26	41.3	31.75	7.2	2.77	3	14.05	2.3	3.2	M5 screw	1	PA 66	UL94 V-2	light grey
NM-28-R28	MS25281-R28	44.5	33	7.2	2.77	3	14.05	2.3	3.2	M5 screw	1	PA 66	UL94 V-2	light grey
NM-3-F3	MS25281-F3	4.8	12.6	6.4	-	1.02	12.7	1.65	1.65	M5 screw	2	PA 66	UL94 V-2	light grey
NM-4-F4	MS25281-F4	6.4	13.4	6.4	-	1.02	12.7	1.65	1.65	M5 screw	2	PA 66	UL94 V-2	light grey
NM-5-F5	MS25281-F5	7.9	14.2	6.4	-	1.3	12.7	1.65	2.4	M5 screw	2	PA 66	UL94 V-2	light grey
NM-6-F6	MS25281-F6	9.5	15	6.4	-	1.3	12.7	1.65	2.4	M5 screw	2	PA 66	UL94 V-2	light grey
NM-7-F7	MS25281-F7	11.1	15.8	6.4	-	1.6	12.7	1.65	2.4	M5 screw	2	PA 66	UL94 V-2	light grey
NM-8-F8	MS25281-F8	12.7	16.6	6.4	-	1.6	12.7	1.65	2.4	M5 screw	2	PA 66	UL94 V-2	light grey
NM-10-F10	MS25281-F10	15.9	19.9	7.6	-	1.85	15.2	1.9	3.2	M5 screw	2	PA 66	UL94 V-2	light grey
NM-13-F13	MS25281-F13	20.6	22.3	7.6	-	1.85	15.2	1.9	3.2	M5 screw	2	PA 66	UL94 V-2	light grey