


NSE-1580 - Slotted Screw

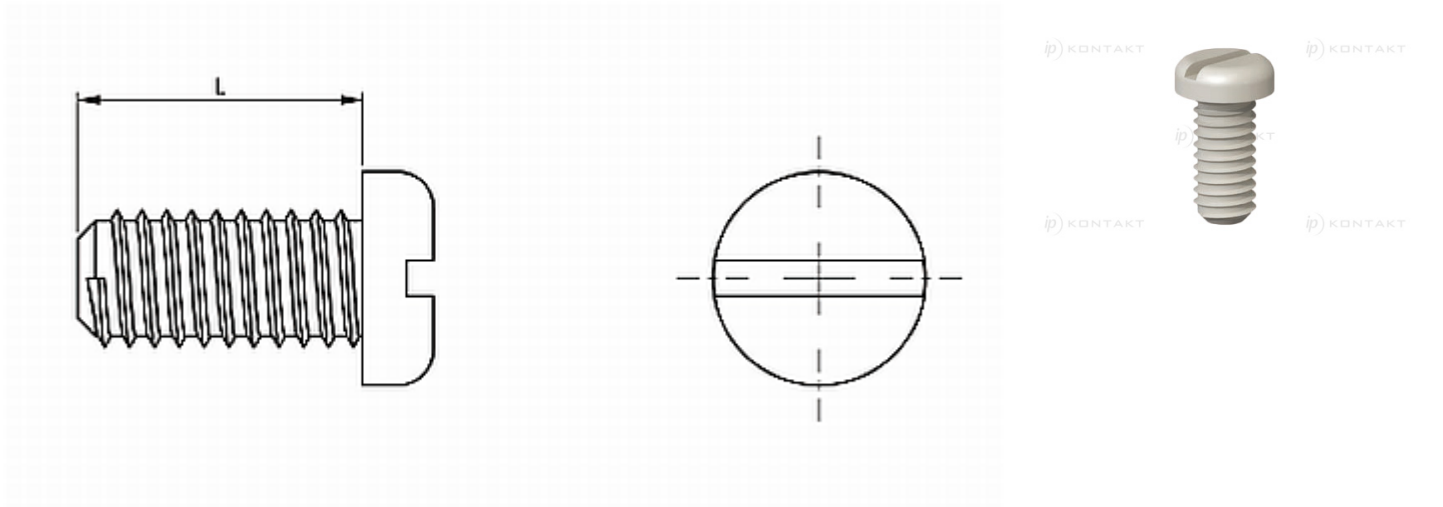

Details:

- **Material: Nylon 6/6, RMS-179***
- **Color: Natural**
- **Standard Pack: 1000/Bag**

Symbol	Thread	Thread length L	Head diameter	Head height	Material	Flammability	Color
		[mm]	[mm]	[mm]			
NSE-1580-M2-4	M2	4	4	1.3	PA 66	UL94 HB	natural
NSE-1580-M2-5	M2	5	4	1.3	PA 66	UL94 HB	natural
NSE-1580-M2-6	M2	6	4	1.3	PA 66	UL94 HB	natural
NSE-1580-M2-8	M2	8	4	1.3	PA 66	UL94 HB	natural
NSE-1580-M2-10	M2	10	4	1.3	PA 66	UL94 HB	natural
NSE-1580-M2-12	M2	12	4	1.3	PA 66	UL94 HB	natural
NSE-1580-M2-16	M2	16	4	1.3	PA 66	UL94 HB	natural
NSE-1580-M2-20	M2	20	4	1.3	PA 66	UL94 HB	natural
NSE-1580-M2-25	M2	25	4	1.3	PA 66	UL94 HB	natural
NSE-1580-M2.5-6	M2.5	6	5	1.5	PA 66	UL94 HB	natural
NSE-1580-M2.5-8	M2.5	8	5	1.5	PA 66	UL94 HB	natural
NSE-1580-M2.5-10	M2.5	10	5	1.5	PA 66	UL94 HB	natural
NSE-1580-M2.5-12	M2.5	12	5	1.5	PA 66	UL94 HB	natural
NSE-1580-M2.5-16	M2.5	16	5	1.5	PA 66	UL94 HB	natural
NSE-1580-M2.5-20	M2.5	20	5	1.5	PA 66	UL94 HB	natural
NSE-1580-M2.5-25	M2.5	25	5	1.5	PA 66	UL94 HB	natural
NSE-1580-M3-4	M3	4	5.6	1.8	PA 66	UL94 HB	natural
NSE-1580-M3-5	M3	5	5.6	1.8	PA 66	UL94 HB	natural
NSE-1580-M3-6	M3	6	5.6	1.8	PA 66	UL94 HB	natural
NSE-1580-M3-8	M3	8	5.6	1.8	PA 66	UL94 HB	natural
NSE-1580-M3-10	M3	10	5.6	1.8	PA 66	UL94 HB	natural
NSE-1580-M3-12	M3	12	5.6	1.8	PA 66	UL94 HB	natural
NSE-1580-M3-16	M3	16	5.6	1.8	PA 66	UL94 HB	natural
NSE-1580-M3-20	M3	20	5.6	1.8	PA 66	UL94 HB	natural
NSE-1580-M3-25	M3	25	5.6	1.8	PA 66	UL94 HB	natural
NSE-1580-M3-30	M3	30	5.6	1.8	PA 66	UL94 HB	natural
NSE-1580-M4-6	M4	6	8	2.4	PA 66	UL94 HB	natural
NSE-1580-M4-8	M4	8	8	2.4	PA 66	UL94 HB	natural

Symbol	Thread	Thread length L	Head diameter	Head height	Material	Flammability	Color
		[mm]	[mm]	[mm]			
NSE-1580-M4-10	M4	10	8	2.4	PA 66	UL94 HB	natural
NSE-1580-M4-12	M4	12	8	2.4	PA 66	UL94 HB	natural
NSE-1580-M4-16	M4	16	8	2.4	PA 66	UL94 HB	natural
NSE-1580-M4-20	M4	20	8	2.4	PA 66	UL94 HB	natural
NSE-1580-M4-25	M4	25	8	2.4	PA 66	UL94 HB	natural
NSE-1580-M4-30	M4	30	8	2.4	PA 66	UL94 HB	natural
NSE-1580-M4-40	M4	40	8	2.4	PA 66	UL94 HB	natural
NSE-1580-M5-6	M5	6	9.5	3	PA 66	UL94 HB	natural
NSE-1580-M5-8	M5	8	9.5	3	PA 66	UL94 HB	natural
NSE-1580-M5-10	M5	10	9.5	3	PA 66	UL94 HB	natural
NSE-1580-M5-12	M5	12	9.5	3	PA 66	UL94 HB	natural
NSE-1580-M5-16	M5	16	9.5	3	PA 66	UL94 HB	natural
NSE-1580-M5-20	M5	20	9.5	3	PA 66	UL94 HB	natural
NSE-1580-M5-25	M5	25	9.5	3	PA 66	UL94 HB	natural
NSE-1580-M5-30	M5	30	9.5	3	PA 66	UL94 HB	natural
NSE-1580-M5-40	M5	40	9.5	3	PA 66	UL94 HB	natural
NSE-1580-M6-6	M6	6	12	3.6	PA 66	UL94 HB	natural
NSE-1580-M6-8	M6	8	12	3.6	PA 66	UL94 HB	natural
NSE-1580-M6-10	M6	10	12	3.6	PA 66	UL94 HB	natural
NSE-1580-M6-12	M6	12	12	3.6	PA 66	UL94 HB	natural
NSE-1580-M6-16	M6	16	12	3.6	PA 66	UL94 HB	natural
NSE-1580-M6-20	M6	20	12	3.6	PA 66	UL94 HB	natural
NSE-1580-M6-25	M6	25	12	3.6	PA 66	UL94 HB	natural
NSE-1580-M6-30	M6	30	12	3.6	PA 66	UL94 HB	natural
NSE-1580-M6-40	M6	40	12	3.6	PA 66	UL94 HB	natural
NSE-1580-M6-50	M6	50	12	3.6	PA 66	UL94 HB	natural