


NSE-2010 - Slotted Screw

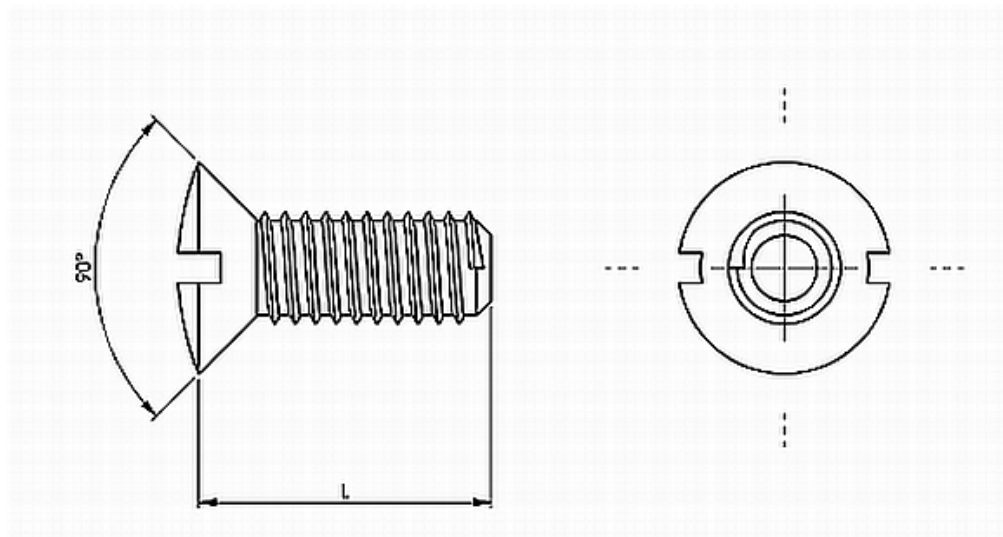

Details:

- **Material:** Nylon 6/6, RMS-179*
- **Color:** Natural
- **Standard Pack:** 1000/Bag

Symbol	Thread	L	Head diameter	Head height	Material	Flammability	Color
		[mm]	[mm]	[mm]			
NSE-2010-M3-5	M3	5	5.5	1.65	PA 66	UL94 HB	natural
NSE-2010-M3-6	M3	6	5.5	1.65	PA 66	UL94 HB	natural
NSE-2010-M3-8	M3	8	5.5	1.65	PA 66	UL94 HB	natural
NSE-2010-M3-10	M3	10	5.5	1.65	PA 66	UL94 HB	natural
NSE-2010-M3-12	M3	12	5.5	1.65	PA 66	UL94 HB	natural
NSE-2010-M3-16	M3	16	5.5	1.65	PA 66	UL94 HB	natural
NSE-2010-M3-20	M3	20	5.5	1.65	PA 66	UL94 HB	natural
NSE-2010-M3-25	M3	25	5.5	1.65	PA 66	UL94 HB	natural
NSE-2010-M4-6	M4	6	8.4	2.7	PA 66	UL94 HB	natural
NSE-2010-M4-8	M4	8	8.4	2.7	PA 66	UL94 HB	natural
NSE-2010-M4-10	M4	10	8.4	2.7	PA 66	UL94 HB	natural
NSE-2010-M4-12	M4	12	8.4	2.7	PA 66	UL94 HB	natural
NSE-2010-M4-15	M4	15	8.4	2.7	PA 66	UL94 HB	natural
NSE-2010-M4-20	M4	20	8.4	2.7	PA 66	UL94 HB	natural
NSE-2010-M4-25	M4	25	8.4	2.7	PA 66	UL94 HB	natural
NSE-2010-M4-30	M4	30	8.4	2.7	PA 66	UL94 HB	natural
NSE-2010-M5-10	M5	10	9.3	2.7	PA 66	UL94 HB	natural
NSE-2010-M5-12	M5	12	9.3	2.7	PA 66	UL94 HB	natural
NSE-2010-M5-15	M5	15	9.3	2.7	PA 66	UL94 HB	natural
NSE-2010-M5-18	M5	18	9.3	2.7	PA 66	UL94 HB	natural
NSE-2010-M5-20	M5	20	9.3	2.7	PA 66	UL94 HB	natural
NSE-2010-M5-25	M5	25	9.3	2.7	PA 66	UL94 HB	natural
NSE-2010-M5-30	M5	30	9.3	2.7	PA 66	UL94 HB	natural
NSE-2010-M6-8	M6	8	11.3	3.3	PA 66	UL94 HB	natural
NSE-2010-M6-10	M6	10	11.3	3.3	PA 66	UL94 HB	natural
NSE-2010-M6-12	M6	12	11.3	3.3	PA 66	UL94 HB	natural
NSE-2010-M6-15	M6	15	11.3	3.3	PA 66	UL94 HB	natural
NSE-2010-M6-20	M6	20	11.3	3.3	PA 66	UL94 HB	natural

Symbol	Thread	L	Head diameter	Head height	Material	Flammability	Color
		[mm]	[mm]	[mm]			
NSE-2010-M6-22	M6	22	11.3	3.3	PA 66	UL94 HB	natural
NSE-2010-M6-25	M6	25	11.3	3.3	PA 66	UL94 HB	natural
NSE-2010-M6-30	M6	30	11.3	3.3	PA 66	UL94 HB	natural
NSE-2010-M6-40	M6	40	11.3	3.3	PA 66	UL94 HB	natural
NSE-2010-M6-50	M6	50	11.3	3.3	PA 66	UL94 HB	natural