


NSS/NSP - Slotted and Phillips Pan Head Screws

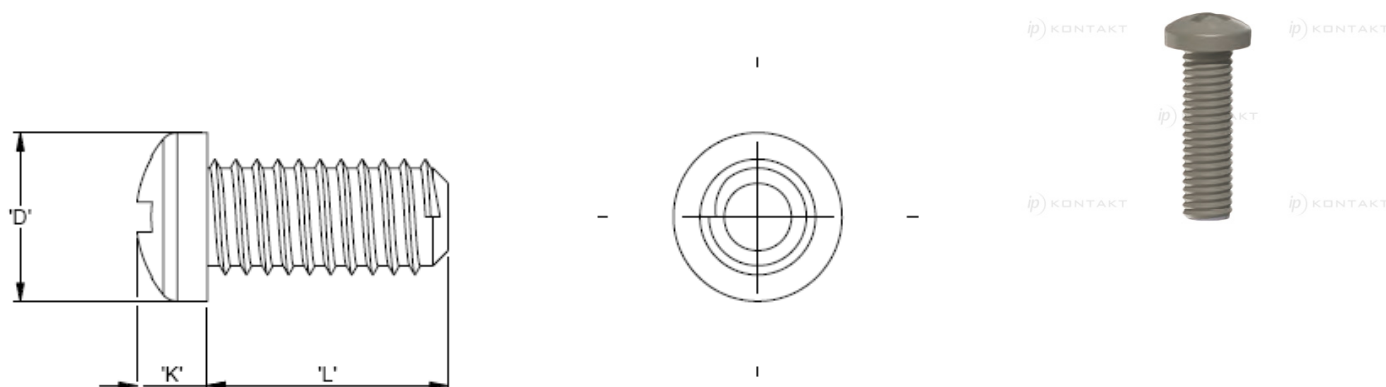

Details:

- **Material:** Nylon 6/6, RMS-179*
- **Color:** Natural
- **Standard Pack:** 1000/Bag

Symbol	Thread	Head height K	Head diameter D	Thread length L	Material	Flammability	Color	Notes
		[mm]	[mm]	[mm]				
NSS-4-2-01	UNC 4-40	1.8	5.3	3.2	PA 66	UL94 V-2	natural	slotted
NSS-4-3-01	UNC 4-40	1.8	5.3	4.8	PA 66	UL94 V-2	natural	slotted
NSS-4-4-01	UNC 4-40	1.8	5.3	6.4	PA 66	UL94 V-2	natural	slotted
NSS-4-5-01	UNC 4-40	1.8	5.3	7.9	PA 66	UL94 V-2	natural	slotted
NSS-4-6-01	UNC 4-40	1.8	5.3	9.5	PA 66	UL94 V-2	natural	slotted
NSS-4-7-01	UNC 4-40	1.8	5.3	11.1	PA 66	UL94 V-2	natural	slotted
NSS-4-8-01	UNC 4-40	1.8	5.3	12.7	PA 66	UL94 V-2	natural	slotted
NSS-6-2-01	UNC 6-32	2	6.9	3.2	PA 66	UL94 V-2	natural	slotted
NSS-6-3-01	UNC 6-32	2	6.9	4.8	PA 66	UL94 V-2	natural	slotted
NSS-6-4-01	UNC 6-32	2	6.9	6.4	PA 66	UL94 V-2	natural	slotted
NSS-6-5-01	UNC 6-32	2	6.9	7.9	PA 66	UL94 V-2	natural	slotted
NSS-6-6-01	UNC 6-32	2	6.9	9.5	PA 66	UL94 V-2	natural	slotted
NSS-6-7-01	UNC 6-32	2	6.9	11.1	PA 66	UL94 V-2	natural	slotted
NSS-6-8-01	UNC 6-32	2	6.9	12.7	PA 66	UL94 V-2	natural	slotted
NSS-8-2-01	UNC 8-32	2	8.1	3.2	PA 66	UL94 V-2	natural	slotted
NSS-8-3-01	UNC 8-32	2	8.1	4.8	PA 66	UL94 V-2	natural	slotted
NSS-8-4-01	UNC 8-32	2	8.1	6.4	PA 66	UL94 V-2	natural	slotted
NSS-8-5-01	UNC 8-32	2	8.1	7.9	PA 66	UL94 V-2	natural	slotted
NSS-8-6-01	UNC 8-32	2	8.1	9.5	PA 66	UL94 V-2	natural	slotted
NSS-8-7-01	UNC 8-32	2	8.1	11.1	PA 66	UL94 V-2	natural	slotted
NSS-8-8-01	UNC 8-32	2	8.1	12.7	PA 66	UL94 V-2	natural	slotted
NSP-4-2-01	UNC 4-40	2	5.3	3.2	PA 66	UL94 V-2	natural	Philips socket
NSP-4-3-01	UNC 4-40	2	5.3	4.8	PA 66	UL94 V-2	natural	Philips socket
NSP-4-4-01	UNC 4-40	2	5.3	6.4	PA 66	UL94 V-2	natural	Philips socket
NSP-4-5-01	UNC 4-40	2	5.3	7.9	PA 66	UL94 V-2	natural	Philips socket
NSP-4-6-01	UNC 4-40	2	5.3	9.5	PA 66	UL94 V-2	natural	Philips socket

Symbol	Thread	Head height K	Head diameter D	Thread length L	Material	Flammability	Color	Notes
		[mm]	[mm]	[mm]				
NSP-4-7-01	UNC 4-40	2	5.3	11.1	PA 66	UL94 V-2	natural	Philips socket
NSP-4-8-01	UNC 4-40	2	5.3	12.7	PA 66	UL94 V-2	natural	Philips socket
NSP-6-2-01	UNC 6-32	2.3	6.6	3.2	PA 66	UL94 V-2	natural	Philips socket
NSP-6-3-01	UNC 6-32	2.3	6.6	4.8	PA 66	UL94 V-2	natural	Philips socket
NSP-6-4-01	UNC 6-32	2.3	6.6	6.4	PA 66	UL94 V-2	natural	Philips socket
NSP-6-5-01	UNC 6-32	2.3	6.6	7.9	PA 66	UL94 V-2	natural	Philips socket
NSP-6-6-01	UNC 6-32	2.3	6.6	9.5	PA 66	UL94 V-2	natural	Philips socket
NSP-6-7-01	UNC 6-32	2.3	6.6	11.1	PA 66	UL94 V-2	natural	Philips socket
NSP-6-8-01	UNC 6-32	2.3	6.6	12.7	PA 66	UL94 V-2	natural	Philips socket
NSP-8-2-01	UNC 8-32	2.8	8.1	3.2	PA 66	UL94 V-2	natural	Philips socket
NSP-8-3-01	UNC 8-32	2.8	8.1	4.8	PA 66	UL94 V-2	natural	Philips socket
NSP-8-4-01	UNC 8-32	2.8	8.1	6.4	PA 66	UL94 V-2	natural	Philips socket
NSP-8-5-01	UNC 8-32	2.8	8.1	7.9	PA 66	UL94 V-2	natural	Philips socket
NSP-8-6-01	UNC 8-32	2.8	8.1	9.5	PA 66	UL94 V-2	natural	Philips socket
NSP-8-7-01	UNC 8-32	2.8	8.1	11.1	PA 66	UL94 V-2	natural	Philips socket
NSP-8-8-01	UNC 8-32	2.8	8.1	12.7	PA 66	UL94 V-2	natural	Philips socket