
IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

O-MAGC -



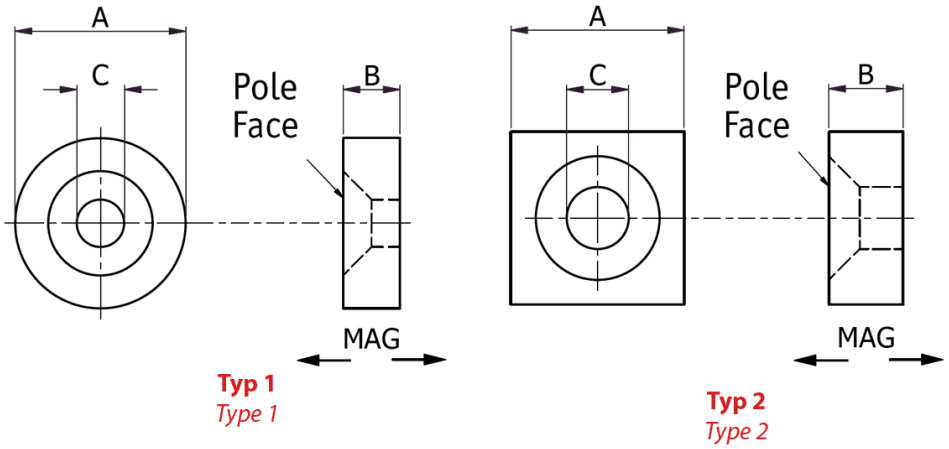

Details:

- These countersunk magnets are extremely versatile and the neodymium magnet is easily fixed using a simple countersunk screw
- They are triple coated (NiCuNi) for maximum protection against corrosion
- Maximum operating temperature: 100°C
- These magnets are available in both North and South facing polarities
- Type 1 is a round disc design
- Type 2 is a square design with a length and width of 10mm

Symbol	Type	Facing polarity	A	B	C	Pull	Standard pack
			[mm]	[mm]	[mm]		[szt./pcs]
O-MAGC-1-021-N	1	N	10	5	3.2	2.1 kg	10
O-MAGC-1-021-S	1	S	10	5	3.2	2.1 kg	10
O-MAGC-2-024-N	2	N	10	5	5	2.4 kg	10
O-MAGC-2-024-S	2	S	10	5	5	2.4 kg	10
O-MAGC-1-022-N	1	N	20	2	3	2.2 kg	5
O-MAGC-1-022-S	1	S	20	2	3	2.2 kg	5
O-MAGC-1-047-N	1	N	20	5	5	4.7 kg	2
O-MAGC-1-047-S	1	S	20	5	5	4.7 kg	2
O-MAGC-1-094-N	1	N	20	10	6	9.4 kg	1
O-MAGC-1-094-S	1	S	20	10	6	9.4 kg	1
O-MAGC-1-232-N	1	N	23	20	6	23.2 kg	1
O-MAGC-1-232-S	1	S	23	20	6	23.2 kg	1
O-MAGC-1-060-N	1	N	25	5	6	6 kg	1
O-MAGC-1-060-S	1	S	25	5	6	6 kg	1