


O-NC - Nylon conduit

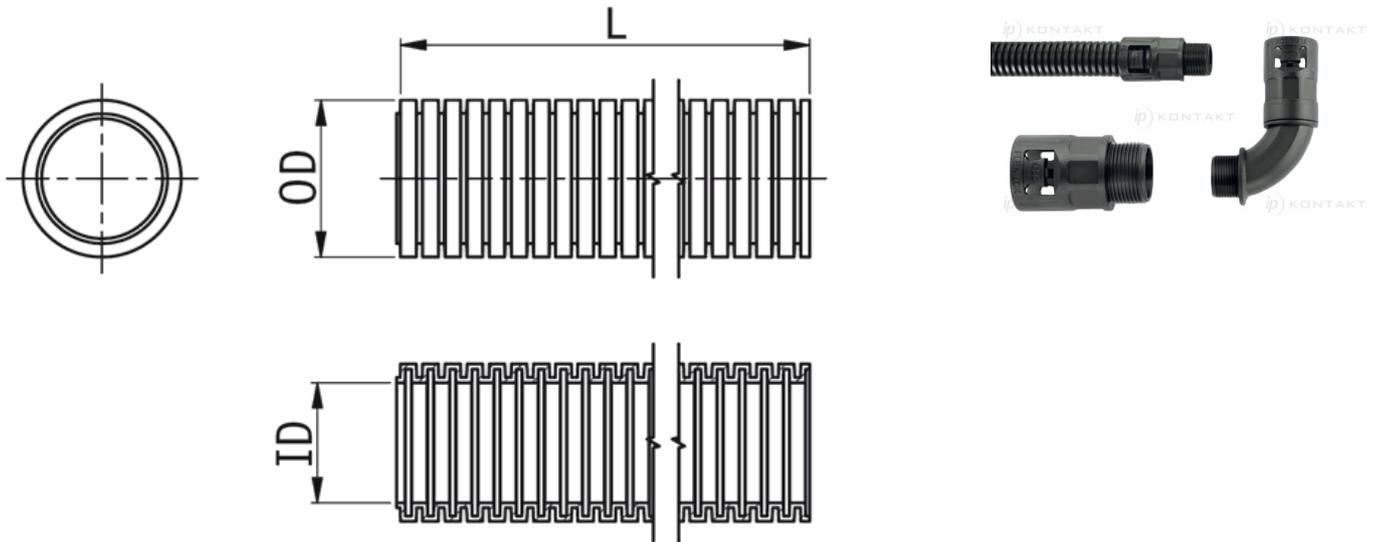

Details:

- **Material: Nylon UL94V2**
- **Color: black**
- Halogen, sulphur and phosphorus free
- Temperature range: -40 to 120°C (-20 to 100°C for moving applications)
- Highly flexible and high fatigue life
- High impact strength and recovers if crushed
- Self-extinguishing
- IP66 when used with standard fittings
- High abrasion resistant
- High UV resistance
- UL94 V2 flame retardancy
- Highly resistant to solvents and oils
- Typical applications include: usage with all types of machinery and in public buildings

Symbol	Type	Thread	Nominal diameter	Length	Ext. diameter OD	Int. diameter ID	Min. bending radius	Material	Flammability	Color	Standard pack
			[mm]								[m]
O-NC-20-50	conduit reel	-	20	50	20	14.8	45	PA	UL94 V-2	black	1
O-NC-21-25	conduit reel	-	21	25	21.2	16.7	45	PA	UL94 V-2	black	1
O-NC-21-50	conduit reel	-	21	50	21.2	16.7	45	PA	UL94 V-2	black	1
O-NC-25-25	conduit reel	-	25	25	25	19.1	50	PA	UL94 V-2	black	1
O-NC-25-50	conduit reel	-	25	50	25	19.1	50	PA	UL94 V-2	black	1
O-NC-28-25	conduit reel	-	28	25	28.5	22.8	50	PA	UL94 V-2	black	1
O-NC-28-50	conduit reel	-	28	50	28.5	22.8	50	PA	UL94 V-2	black	1
O-NC-1-M20	straight fitting	M20	-	-	-	-	-	PA	UL94 V-2	black	10
O-NC-1-M21	straight fitting	M21	-	-	-	-	-	PA	UL94 V-2	black	10
O-NC-1-M25	straight fitting	M25	-	-	-	-	-	PA	UL94 V-2	black	10
O-NC-1-M28	straight fitting	M28	-	-	-	-	-	PA	UL94 V-2	black	10
O-NC-2-M20	angle fitting 90°	M20	-	-	-	-	-	PA	UL94 V-2	black	10

Symbol	Type	Thread	Nominal diameter	Length	Ext. diameter OD	Int. diameter ID	Min. bending radius	Material	Flammability	Color	Standard pack
			[mm]	[m]	[mm]	[mm]	[mm]				[szt./pcs]
O-NC-2-M21	angle fitting 90°	M21	-	-	-	-	-	PA	UL94 V-2	black	10
O-NC-2-M25	angle fitting 90°	M25	-	-	-	-	-	PA	UL94 V-2	black	10
O-NC-2-M28	angle fitting 90°	M28	-	-	-	-	-	PA	UL94 V-2	black	10