


O-SLS - Slotted Countersunk Screws

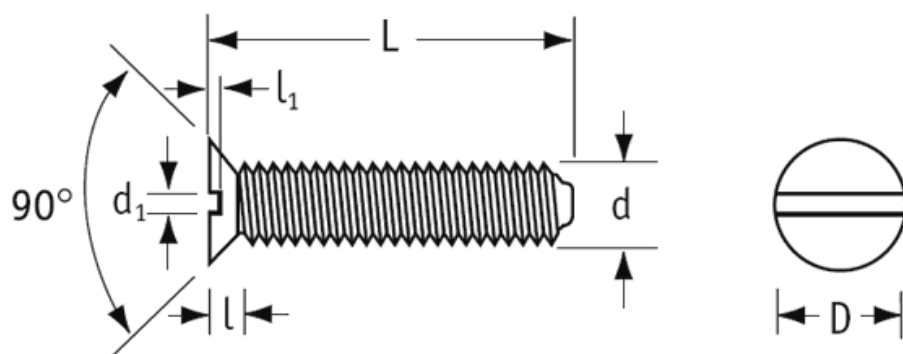

Details:

- **Material:** Nylon 6.6
- **Color:** see table
- Refer to standard ISO 2009, NF E 25-123, DIN 963 for guidance purposes only
- O-SLS-M5-100-NAT niezgodny z normą DIN 963

Symbol	Thread d	L	Head diameter D	Head height l	d ₁	l ₁	Material	Color	Standard pack
		[mm]	[mm]	[mm]	[mm]	[mm]			[szt./pcs]
O-SLS-M2-040-NAT	M2	4	4	1.2	0.6	0.5	PA 66	natural	1000
O-SLS-M2-050-NAT	M2	5	4	1.2	0.6	0.5	PA 66	natural	1000
O-SLS-M2-060-NAT	M2	6	4	1.2	0.6	0.5	PA 66	natural	1000
O-SLS-M2-080-NAT	M2	8	4	1.2	0.6	0.5	PA 66	natural	1000
O-SLS-M2-100-NAT	M2	10	4	1.2	0.6	0.5	PA 66	natural	1000
O-SLS-M2-120-NAT	M2	12	4	1.2	0.6	0.5	PA 66	natural	1000
O-SLS-M2-160-NAT	M2	16	4	1.2	0.6	0.5	PA 66	natural	1000
O-SLS-M2-250-NAT	M2	25	4	1.2	0.6	0.5	PA 66	natural	1000
O-SLS-M2.5-040-NAT	M2.5	4	4.7	1.5	0.7	0.6	PA 66	natural	1000
O-SLS-M2.5-050-NAT	M2.5	5	4.7	1.5	0.7	0.6	PA 66	natural	1000
O-SLS-M2.5-060-NAT	M2.5	6	4.7	1.5	0.7	0.6	PA 66	natural	1000
O-SLS-M2.5-080-NAT	M2.5	8	4.7	1.5	0.7	0.6	PA 66	natural	1000
O-SLS-M2.5-100-NAT	M2.5	10	4.7	1.5	0.7	0.6	PA 66	natural	1000
O-SLS-M2.5-160-NAT	M2.5	16	4.7	1.5	0.7	0.6	PA 66	natural	1000
O-SLS-M2.5-200-NAT	M2.5	20	4.7	1.5	0.7	0.6	PA 66	natural	1000
O-SLS-M2.5-250-NAT	M2.5	25	4.7	1.5	0.7	0.6	PA 66	natural	1000
O-SLS-M3-040-NAT	M3	4	6	1.7	0.8	0.9	PA 66	natural	1000
O-SLS-M3-060-NAT	M3	6	6	1.7	0.8	0.9	PA 66	natural	1000
O-SLS-M3-080-BLK	M3	8	6	1.7	0.8	0.9	PA 66	black	100
O-SLS-M3-080-NAT	M3	8	6	1.7	0.8	0.9	PA 66	natural	1000
O-SLS-M3-100-BLK	M3	10	6	1.7	0.8	0.9	PA 66	black	100
O-SLS-M3-100-NAT	M3	10	6	1.7	0.8	0.9	PA 66	natural	1000
O-SLS-M3-120-BLK	M3	12	6.3	1.7	0.8	0.9	PA 66	black	100
O-SLS-M3-120-NAT	M3	12	6.3	1.7	0.8	0.9	PA 66	natural	1000
O-SLS-M3-160-BLK	M3	16	6	1.7	0.8	0.9	PA 66	black	100

Symbol	Thread d	L	Head diameter D	Head height l	d ₁	l ₁	Material	Color	Standard pack
		[mm]	[mm]	[mm]	[mm]	[mm]			[szt./pcs]
O-SLS-M3-160-NAT	M3	16	6	1.7	0.8	0.9	PA 66	natural	1000
O-SLS-M3-200-BLK	M3	20	6	1.7	0.8	0.9	PA 66	black	100
O-SLS-M3-200-NAT	M3	20	6	1.7	0.8	0.9	PA 66	natural	1000
O-SLS-M3-250-NAT	M3	25	6.3	1.7	0.8	0.9	PA 66	natural	1000
O-SLS-M3-300-NAT	M3	30	5.6	1.7	0.9	0.7	PA 66	natural	1000
O-SLS-M3-400-NAT	M3	40	5.6	1.7	0.9	0.7	PA 66	natural	1000
O-SLS-M4-060-NAT	M4	6	7.8	2.7	1.2	1.3	PA 66	natural	1000
O-SLS-M4-080-NAT	M4	8	7.8	2.7	1.2	1.3	PA 66	natural	1000
O-SLS-M4-100-BLK	M4	10	7.8	2.7	1.2	1.3	PA 66	black	100
O-SLS-M4-100-NAT	M4	10	7.8	2.7	1.2	1.3	PA 66	natural	1000
O-SLS-M4-120-BLK	M4	12	7.8	2.7	1.2	1.3	PA 66	black	100
O-SLS-M4-120-NAT	M4	12	7.8	2.7	1.2	1.3	PA 66	natural	1000
O-SLS-M4-160-BLK	M4	16	7.8	2.7	1.2	1.3	PA 66	black	100
O-SLS-M4-160-NAT	M4	16	7.8	2.7	1.2	1.3	PA 66	natural	1000
O-SLS-M4-180-NAT	M4	18	7.8	2.7	1.2	1.3	PA 66	natural	1000
O-SLS-M4-200-BLK	M4	20	7.8	2.7	1.2	1.3	PA 66	black	100
O-SLS-M4-200-NAT	M4	20	7.8	2.7	1.2	1.3	PA 66	natural	1000
O-SLS-M4-250-NAT	M4	25	7.8	2.7	1.2	1.3	PA 66	natural	1000
O-SLS-M4-300-BLK	M4	30	7.8	2.7	1.2	1.3	PA 66	black	100
O-SLS-M4-300-NAT	M4	30	7.8	2.7	1.2	1.3	PA 66	natural	1000
O-SLS-M4-350-NAT	M4	35	7.8	2.7	1.2	1.3	PA 66	natural	1000
O-SLS-M4-400-NAT	M4	40	7.8	2.7	1.2	1.3	PA 66	natural	1000
O-SLS-M5-060-NAT	M5	6	10.3	2.5	1.4	1.2	PA 66	natural	1000
O-SLS-M5-080-NAT	M5	8	10.3	2.5	1.4	1.2	PA 66	natural	1000
O-SLS-M5-100-BLK	M5	10	10	2.7	1.2	1.4	PA 66	black	100
O-SLS-M5-100-NAT1	M5	10	10	2.7	1.2	1.4	PA 66	natural	1000
O-SLS-M5-120-NAT	M5	12	9	2.7	1.2	1.4	PA 66	natural	1000
O-SLS-M5-160-BLK	M5	16	10	2.7	1.2	1.4	PA 66	black	100
O-SLS-M5-160-NAT	M5	16	10	2.7	1.2	1.4	PA 66	natural	1000
O-SLS-M5-180-NAT	M5	18	10.4	2.7	1.2	1.4	PA 66	natural	1000
O-SLS-M5-200-BLK	M5	20	10	2.7	1.2	1.4	PA 66	black	100
O-SLS-M5-200-NAT	M5	20	10	2.7	1.2	1.4	PA 66	natural	1000
O-SLS-M5-250-NAT	M5	25	10	2.7	1.2	1.4	PA 66	natural	1000
O-SLS-M5-300-BLK	M5	30	9.2	2.7	1.2	1.4	PA 66	black	100
O-SLS-M5-300-NAT	M5	30	9.2	2.7	1.2	1.4	PA 66	natural	1000
O-SLS-M5-350-NAT	M5	35	10.4	2.7	1.2	1.4	PA 66	natural	1000
O-SLS-M5-400-BLK	M5	40	9.2	2.7	1.2	1.4	PA 66	black	100
O-SLS-M5-400-NAT	M5	40	9.2	2.7	1.2	1.4	PA 66	natural	1000
O-SLS-M5-600-NAT	M5	60	9.2	2.7	1.2	1.4	PA 66	natural	500
O-SLS-M6-080-NAT	M6	8	11	3.3	1.6	1.6	PA 66	natural	1000
O-SLS-M6-100-BLK	M6	10	11	3.3	1.6	1.6	PA 66	black	100
O-SLS-M6-100-NAT	M6	10	11	3.3	1.6	1.6	PA 66	natural	1000
O-SLS-M6-120-BLK	M6	12	11	3.3	1.6	1.6	PA 66	black	100
O-SLS-M6-120-NAT	M6	12	11	3.3	1.6	1.6	PA 66	natural	1000
O-SLS-M6-160-BLK	M6	16	11	3.3	1.6	1.6	PA 66	black	100
O-SLS-M6-160-NAT	M6	16	11	3.3	1.6	1.6	PA 66	natural	1000
O-SLS-M6-200-BLK	M6	20	11	3.3	1.6	1.6	PA 66	black	100
O-SLS-M6-200-NAT	M6	20	11	3.3	1.6	1.6	PA 66	natural	1000
O-SLS-M6-250-NAT	M6	25	11	3.3	1.6	1.6	PA 66	natural	1000
O-SLS-M6-300-BLK	M6	30	11	3.3	1.6	1.6	PA 66	black	100
O-SLS-M6-300-NAT	M6	30	11	3.3	1.6	1.6	PA 66	natural	1000
O-SLS-M6-400-BLK	M6	40	11	3.3	1.6	1.6	PA 66	black	100
O-SLS-M6-400-NAT	M6	40	11	3.3	1.6	1.6	PA 66	natural	1000
O-SLS-M6-500-NAT	M6	50	11	3.3	1.6	1.6	PA 66	natural	500

Symbol	Thread d	L	Head diameter D	Head height l	d ₁	l ₁	Material	Color	Standard pack
		[mm]	[mm]	[mm]	[mm]	[mm]			[szt./pcs]
O-SLS-M6-600-BLK	M6	60	11	3.3	1.6	1.6	PA 66	black	100
O-SLS-M6-600-NAT	M6	60	11	3.3	1.6	1.6	PA 66	natural	500
O-SLS-M8-160-BLK	M8	16	14.5	4.7	2	2.3	PA 66	black	100
O-SLS-M8-160-NAT	M8	16	14.5	4.7	2	2.3	PA 66	natural	1000
O-SLS-M8-200-BLK	M8	20	14.5	4.7	2	2.3	PA 66	black	100
O-SLS-M8-200-NAT	M8	20	14.5	4.7	2	2.3	PA 66	natural	1000
O-SLS-M8-250-NAT	M8	25	14.5	4.7	2	2.3	PA 66	natural	1000
O-SLS-M8-300-BLK	M8	30	14.5	4.7	2	2.3	PA 66	black	100
O-SLS-M8-300-NAT	M8	30	14.5	4.7	2	2.3	PA 66	natural	1000
O-SLS-M8-400-NAT	M8	40	14.5	4.7	2	2.3	PA 66	natural	1000
O-SLS-M8-500-BLK	M8	50	14.5	4.7	2	2.3	PA 66	black	100
O-SLS-M8-500-NAT	M8	50	14.5	4.7	2	2.3	PA 66	natural	500
O-SLS-M8-600-NAT	M8	60	14.5	4.7	2	2.3	PA 66	natural	500
O-SLS-M10-200-NAT	M10	20	18	5	2.6	2.3	PA 66	natural	500
O-SLS-M10-250-NAT	M10	25	18	5	2.6	2.3	PA 66	natural	500
O-SLS-M10-300-NAT	M10	30	18	5	2.6	2.3	PA 66	natural	500
O-SLS-M10-350-NAT	M10	35	18	5	2.6	2.3	PA 66	natural	500
O-SLS-M10-400-NAT	M10	40	17.5	5	2.6	2.3	PA 66	natural	500
O-SLS-M10-600-NAT	M10	60	18	5	2.6	2.3	PA 66	natural	250