



O-SOFG - Screw-On Feet

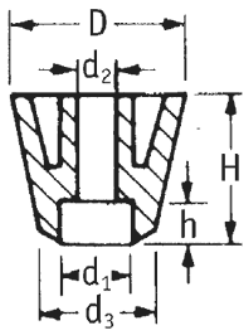

Rys. 1
Fig. 1

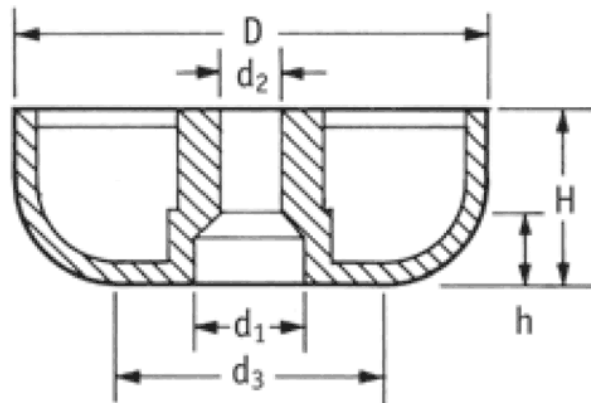

Rys. 2
Fig. 2

Details:

- **Material: LDPE, TPR or Natural Rubber**
- **Colour: black**
- TPR is recommended for excellent slip resistance
- Fit with screws (not supplied)
- Standard pack: see table

Symbol	Fig.	Height H	Ext. diameter D	d ₃	d ₂	d ₁	h	Material	Color	Standard pack
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			[szt./pcs]
O-SOFG-1-071-159-1	1	7.1	15.9	13.5	7.9	3.2	4	LDPE	black	10000
O-SOFG-1-071-159-2	1	7.1	15.9	13.5	7.9	3.2	4	TPR	black	10000
O-SOFG-1-095-164-1	1	9.5	16.4	16.4	6.4	4	5.6	LDPE	black	10000
O-SOFG-1-095-164-2	1	9.5	16.4	16.4	6.4	4	5.6	TPR	black	10000
O-SOFG-1-113-193-1	1	11.3	19.3	18	7.5	3.2	7.9	LDPE	black	5000
O-SOFG-1-113-193-2	1	11.3	19.3	18	7.5	3.2	7.9	TPR	black	5000
O-SOFG-1-119-198-1	1	11.9	19.8	18.2	9.5	4.7	6.3	LDPE	black	5000
O-SOFG-1-119-198-2	1	11.9	19.8	18.2	9.5	4.7	6.3	TPR	black	5000
O-SOFG-1-159-190-1	1	15.9	19	12.7	7.9	4	4.8	LDPE	black	5000
O-SOFG-1-159-190-2	1	15.9	19	12.7	7.9	4	4.8	TPR	black	5000
O-SOFG-1-182-185-1	1	18.2	18.5	17.5	8.5	4.8	7.9	LDPE	black	2000
O-SOFG-1-182-185-2	1	18.2	18.5	17.5	8.5	4.8	7.9	TPR	black	2000
O-SOFG-1-254-222-1	1	25.4	22.2	12.7	8.7	4	14.3	LDPE	black	3000

Symbol	Fig.	Height H	Ext. diameter D	d ₃	d ₂	d ₁	h	Material	Color	Standard pack
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			[szt./pcs]
O-SOFG-1-254-222-2	1	25.4	22.2	12.7	8.7	4	14.3	TPR	black	3000
O-SOFG-2-080-190-3	2	8	19	16	7	3	6	natural rubber	black	425
O-SOFG-2-080-220-3	2	8	22	19	10	3	6	natural rubber	black	300
O-SOFG-2-090-160-3	2	9	16	13	7	3	4	natural rubber	black	425
O-SOFG-2-090-250-3	2	9	25	20	13.5	5	6	natural rubber	black	250
O-SOFG-2-095-175-1	2	9.5	17.5	17.5	7.9	4	5.2	LDPE	black	3500
O-SOFG-2-095-175-2	2	9.5	17.5	17.5	7.9	4	5.2	TPR	black	3500
O-SOFG-2-150-270-3	2	15	27	20	10	6	10	natural rubber	black	250
O-SOFG-2-160-450-1	2	16	45	30	10.5	5	10	LDPE	black	3000
O-SOFG-2-190-550-1	2	19	55	40	10.5	5	12	LDPE	black	750
O-SOFG-2-230-350-3	2	23	35	30	9	6	5	natural rubber	black	450