


O-SSP - Pressed Steel Bolt Down Feet

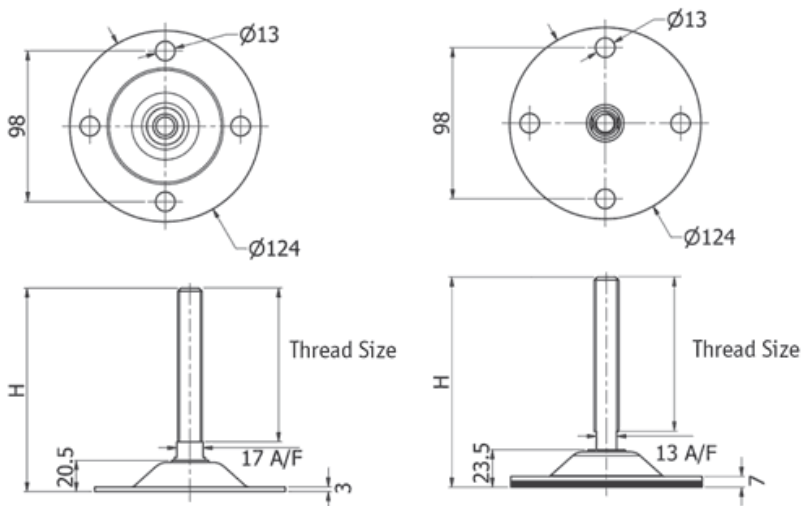

Details:

- **Material: Galvanised Steel, NBR 80 Rubber**
- High load capacity
- 8° articulation
- 4 x 12.5mm fixing holes
- With or without rubber pad for base
- Ideal for conveyors and machines

Symbol	Base diameter	Metric thread	Stud length	Rubber pad	Height H	Max. load (static)	Standard pack
	[mm]		[mm]		[mm]	[N]	[szt./pcs]
O-SSP-W-M16-134	124	M16	100	No	134	20000	2
O-SSP-W-M16-184	124	M16	150	No	184	20000	2
O-SSP-W-M20-134	124	M20	100	No	134	20000	2
O-SSP-W-M20-184	124	M20	150	No	184	20000	2
O-SSP-P-M16-134	124	M16	100	Yes	134	20000	2
O-SSP-P-M16-184	124	M16	150	Yes	184	20000	2
O-SSP-P-M20-134	124	M20	100	Yes	134	20000	2
O-SSP-P-M20-184	124	M20	150	Yes	184	20000	2