


O-UKAB - P clips

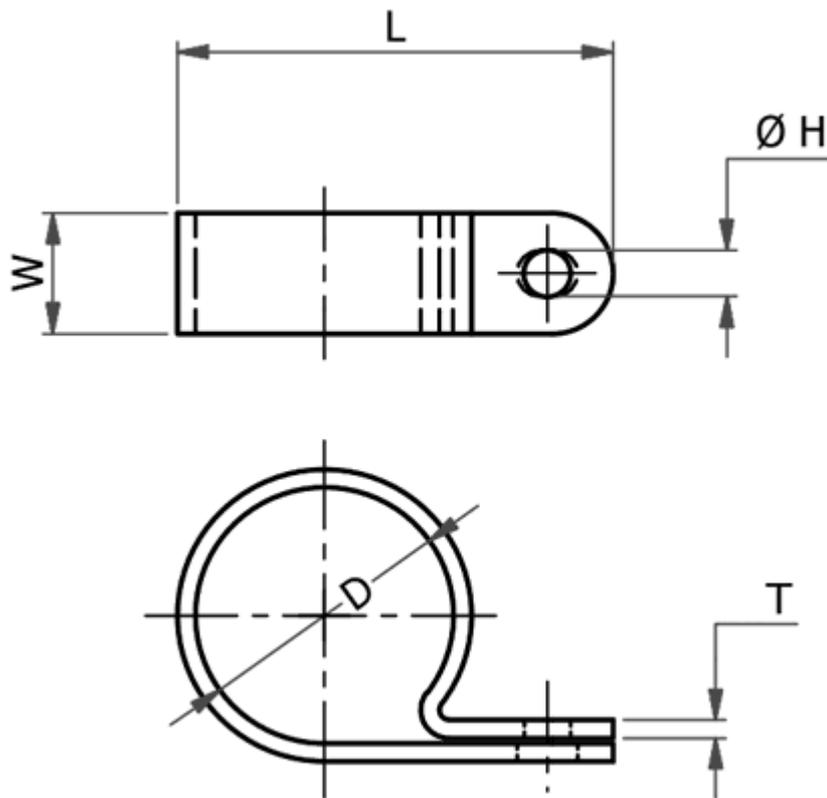

Details:

- **Material: Nylon 6.6**
- **Color: natural (NAT) or black (BLK)**
- Easy to install
- Ideal for holding cables, tubes and pipes
- Flammability rating UL94 V2
- Screw fixing hole diameter 4.6 mm
- Standard pack: 100 pcs

Symbol	Max. cable bundle diameter d	L	W	Material	Flammability	Color
	[mm]	[mm]	[mm]			
O-UKAB-032-NAT	3.2	19.8	9.6	PA 66	UL94 V-2	natural
O-UKAB-032-BLK	3.2	19.8	9.6	PA 66	UL94 V-2	black
O-UKAB-048-NAT	4.8	19.8	9.6	PA 66	UL94 V-2	natural
O-UKAB-048-BLK	4.8	19.8	9.6	PA 66	UL94 V-2	black
O-UKAB-064-NAT	6.4	22	10	PA 66	UL94 V-2	natural
O-UKAB-064-BLK	6.4	22	10	PA 66	UL94 V-2	black
O-UKAB-079-NAT	7.9	20	10	PA 66	UL94 V-2	natural
O-UKAB-079-BLK	7.9	20	10	PA 66	UL94 V-2	black
O-UKAB-095-NAT	9.5	24	12	PA 66	UL94 V-2	natural
O-UKAB-095-BLK	9.5	24	12	PA 66	UL94 V-2	black
O-UKAB-127-NAT	12.7	31	12	PA 66	UL94 V-2	natural
O-UKAB-127-BLK	12.7	31	12	PA 66	UL94 V-2	black
O-UKAB-158-NAT	15.8	34.3	12	PA 66	UL94 V-2	natural
O-UKAB-158-BLK	15.8	34.3	12	PA 66	UL94 V-2	black

Symbol	Max. cable bundle diameter d	L	W	Material	Flammability	Color
	[mm]	[mm]	[mm]			
O-UKAB-194-NAT	19.4	35	12	PA 66	UL94 V-2	natural
O-UKAB-194-BLK	19.4	35	12	PA 66	UL94 V-2	black
O-UKAB-254-NAT	25.4	43	12	PA 66	UL94 V-2	natural
O-UKAB-254-BLK	25.4	43	12	PA 66	UL94 V-2	black
O-UKAB-275-NAT	27.5	50	12	PA 66	UL94 V-2	natural
O-UKAB-275-BLK	27.5	50	12	PA 66	UL94 V-2	black
O-UKAB-318-NAT	31.8	46.2	12	PA 66	UL94 V-2	natural
O-UKAB-318-BLK	31.8	46.2	12	PA 66	UL94 V-2	black
O-UKAB-367-NAT	36.7	50	12	PA 66	UL94 V-2	natural
O-UKAB-367-BLK	36.7	50	12	PA 66	UL94 V-2	black