
IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

O-USTD - Standard Pull Handles



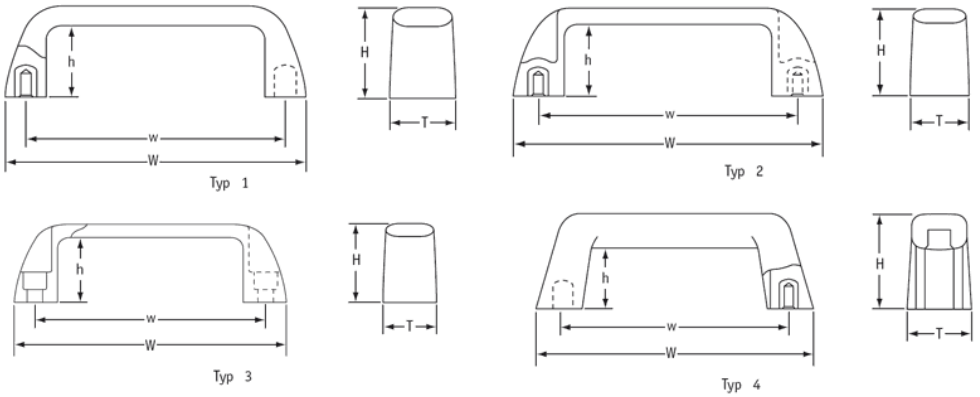

Details:

- **Material: 1 - Glass Filled Thermoplastic; 2 - Duroplast**
- Economical strong handles
- Type 1, 2 & 4 with brass female threaded blind bush
- Type 3 with plain through-hole and recess for screw
- Type 4 with gloss finish

Symbol	Type	Material	Mounting holes spacing w	W	T	H	h	Int. thread	Thread length	Mounting hole diameter	Standard pack
			[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]	[szt./pcs]
O-USTD-1-M5-28	1	1	105	121	26	37	29	M5	9	-	100
O-USTD-1-M6-29	1	1	105	121	26	37	29	M6	9	-	100
O-USTD-1-M5-30	1	1	110	133	26	40	32	M5	9	-	100
O-USTD-1-M6-31	1	1	110	133	26	40	32	M6	9	-	100
O-USTD-1-M5-32	1	1	117	133	26	40	32	M5	9	-	100
O-USTD-1-M6-33	1	1	117	133	26	40	32	M6	9	-	100
O-USTD-1-M8-34	1	1	117	133	26	40	32	M8	9	-	100
O-USTD-2-M6-35	2	1	93.5	112	21	36	30	M6	9	-	100
O-USTD-2-M8-36	2	1	117	139	26	41	34	M8	9	-	100
O-USTD-2-M6-37	2	1	132	156	27	45	37	M6	9	-	100
O-USTD-2-M8-38	2	1	132	156	27	45	37	M8	9	-	100
O-USTD-2-M8-39	2	1	179	204	28	50	42	M8	9	-	100
O-USTD-3-H-40	3	1	93.5	112	21	36	30	-	-	10.5	100
O-USTD-3-H-41	3	1	117	139	26	41	34	-	-	10.5	100
O-USTD-3-H-42	3	1	117	139	26	41	34	-	-	13	100
O-USTD-3-H-43	3	1	132	156	27	45	37	-	-	10.5	100
O-USTD-3-H-44	3	1	132	156	27	45	37	-	-	13	100
O-USTD-3-H-45	3	1	179	204	28	50	42	-	-	13	100
O-USTD-4-M6-46	4	2	105	140	30	48	30	M6	13	-	100
O-USTD-4-M6-47	4	2	110	140	30	48	30	M6	9	-	100
O-USTD-4-M8-48	4	2	117	140	30	48	30	M8	15	-	100
O-USTD-4-M6-49	4	2	120	140	30	48	30	M6	9	-	100
O-USTD-4-M8-50	4	2	120	140	30	48	30	M8	9	-	100
O-USTD-4-M8-51	4	2	132	160	36	56	36	M8	15	-	50
O-USTD-4-M10-52	4	2	132	160	36	56	36	M10	16	-	50