


## O-WRGK - Threaded Inserts

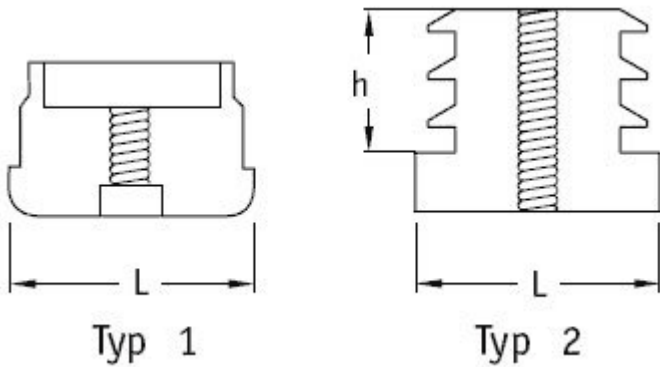

### Details:

- Material: see table
- Can be used with either adjustable feet (O-SWNP, O-SWOP, O-SWP, O-SNNP, O-SOP ) or adjustable tilt glides (O-SNP)
- Suitable for wall thickness of 1.0 - 2.0mm
- Standard pack: see table

Symbol	Type	Shape	Gauge	Thread	L		h	Material	Color	Standard pack
			[mm]		[in]	[mm]				[mm]
O-WRGK1-16-254	1 - imperial	square	16	M8	1	25.4	-	PA	black	1500
O-WRGK1-16-317	1 - imperial	square	16	M8	1.1/4	31.7	-	HIPS	black	500
O-WRGK1-16-381	1 - imperial	square	16	M10	1.1/2	38.1	-	HIPS	black	250
O-WRGK1-18-190	1 - imperial	square	18	M8	3/4	19	-	HIPS	black	4000
O-WRGK1-18-254	1 - imperial	square	18	M8	1	25.4	-	PA	black	1500
O-WRGK1-18-317	1 - imperial	square	18	M8	1.1/4	31.7	-	HIPS	black	600
O-WRGK1-18-381	1 - imperial	square	18	M10	1.1/2	38.1	-	HIPS	black	250
O-WRGO1-14-444	1 - imperial	round	14	M10	1.3/4	44.4	-	PA	black	250
O-WRGO1-16-190	1 - imperial	round	16	M8	3/4	19	-	PA	black	1000
O-WRGO1-16-317	1 - imperial	round	16	M8	1.1/4	31.7	-	PA	black	1000
O-WRGO1-16-381	1 - imperial	round	16	M8	1.1/2	38.1	-	PA	black	1500
O-WRGO1-18-190	1 - imperial	round	18	M8	3/4	19	-	PA	black	1000
O-WRGO1-18-317	1 - imperial	round	18	M8	1.1/4	31.7	-	PA	black	1000
O-WRGP2-20x60-M10	2 - metric	rectangular	-	M10	-	20 x 60	19	HDPE	black	500
O-WRGP2-60x30-M10 ^1	2 - metric	rectangular	-	M10	-	60 x 30	16	LDPE	black	250
O-WRGO2-16-M6	2 - metric	round	-	M6	-	16	34	PA	black	3500
O-WRGO2-16-M8	2 - metric	round	-	M8	-	16	34	PA	black	3500
O-WRGO2-20-M10	2 - metric	round	-	M10	-	20	19	PP	black	2000
O-WRGO2-25-M6	2 - metric	round	-	M6	-	25	33	PA	black	750
O-WRGO2-38-M10	2 - metric	round	-	M10	-	38	25	PA	black	650
O-WRGO2-40-M10	2 - metric	round	-	M10	-	40	19	PP	black	500