


## OR-DL-MH-M - Multihole and flathole metric cable glands

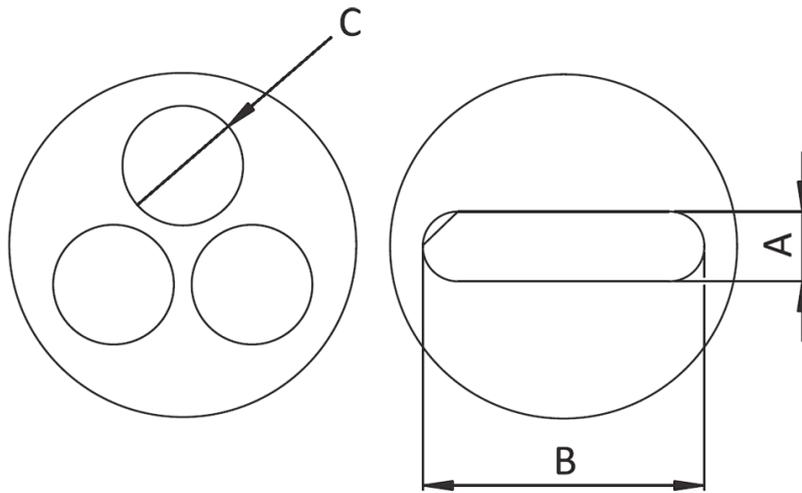

### OR-DL-MH

### OR-DL-FH

#### Details:

- **Body material: PA 66 V2**
- Colour: grey (RAL 7001), Light grey (RAL 7035), black (RAL 9005)
- Thread: metryczny (EN60423)
- Protection class: IP 65
- Working temperature: -30°C to +80°C (150°C short-term)
- Antivibration protection
- UV resistance
- Halogen free

Symbol	Metric thread	Number of wires	Cable shape	Wire height A	Wire width B	Cable diameter C	Material	Flammability	Color
				[mm]	[mm]	[mm]			
OR-DL-MH-M16x1.5-2-3-DGR	M16x1.5	2	round	-	-	3	PA 66	UL94 V-2	dark grey
OR-DL-MH-M16x1.5-2-3-GR	M16x1.5	2	round	-	-	3	PA 66	UL94 V-2	light grey
OR-DL-MH-M16x1.5-2-3-BLK	M16x1.5	2	round	-	-	3	PA 66	UL94 V-2	black
OR-DL-MH-M16x1.5-3-3-DGR	M16x1.5	3	round	-	-	3	PA 66	UL94 V-2	dark grey
OR-DL-MH-M16x1.5-3-3-GR	M16x1.5	3	round	-	-	3	PA 66	UL94 V-2	light grey
OR-DL-MH-M16x1.5-3-3-BLK	M16x1.5	3	round	-	-	3	PA 66	UL94 V-2	black
OR-DL-MH-M16x1.5-4-3-DGR	M16x1.5	4	round	-	-	3	PA 66	UL94 V-2	dark grey
OR-DL-MH-M16x1.5-4-3-GR	M16x1.5	4	round	-	-	3	PA 66	UL94 V-2	light grey
OR-DL-MH-M16x1.5-4-3-BLK	M16x1.5	4	round	-	-	3	PA 66	UL94 V-2	black
OR-DL-MH-M16x1.5-2-4-DGR	M16x1.5	2	round	-	-	4	PA 66	UL94 V-2	dark grey
OR-DL-MH-M16x1.5-2-4-GR	M16x1.5	2	round	-	-	4	PA 66	UL94 V-2	light grey
OR-DL-MH-M16x1.5-2-4-BLK	M16x1.5	2	round	-	-	4	PA 66	UL94 V-2	black
OR-DL-MH-M16x1.5-2-5-DGR	M16x1.5	2	round	-	-	5	PA 66	UL94 V-2	dark grey
OR-DL-MH-M16x1.5-2-5-GR	M16x1.5	2	round	-	-	5	PA 66	UL94 V-2	light grey
OR-DL-MH-M16x1.5-2-5-BLK	M16x1.5	2	round	-	-	5	PA 66	UL94 V-2	black
OR-DL-MH-M16x1.5-3-4-DGR	M16x1.5	3	round	-	-	4	PA 66	UL94 V-2	dark grey
OR-DL-MH-M16x1.5-3-4-GR	M16x1.5	3	round	-	-	4	PA 66	UL94 V-2	light grey
OR-DL-MH-M16x1.5-3-4-BLK	M16x1.5	3	round	-	-	4	PA 66	UL94 V-2	black

Symbol	Metric thread	Number of wires	Cable shape	Wire height A	Wire width B	Cable diameter C	Material	Flammability	Color
				[mm]	[mm]	[mm]			
OR-DL-MH-M16x1.5-3-5-DGR	M16x1.5	3	round	-	-	5	PA 66	UL94 V-2	dark grey
OR-DL-MH-M16x1.5-3-5-GR	M16x1.5	3	round	-	-	5	PA 66	UL94 V-2	light grey
OR-DL-MH-M16x1.5-3-5-BLK	M16x1.5	3	round	-	-	5	PA 66	UL94 V-2	black
OR-DL-MH-M20x1.5-2-5-DGR	M20x1.5	2	round	-	-	5	PA 66	UL94 V-2	dark grey
OR-DL-MH-M20x1.5-2-5-GR	M20x1.5	2	round	-	-	5	PA 66	UL94 V-2	light grey
OR-DL-MH-M20x1.5-2-5-BLK	M20x1.5	2	round	-	-	5	PA 66	UL94 V-2	black
OR-DL-MH-M20x1.5-2-6-DGR	M20x1.5	2	round	-	-	6	PA 66	UL94 V-2	dark grey
OR-DL-MH-M20x1.5-2-6-GR	M20x1.5	2	round	-	-	6	PA 66	UL94 V-2	light grey
OR-DL-MH-M20x1.5-2-6-BLK	M20x1.5	2	round	-	-	6	PA 66	UL94 V-2	black
OR-DL-MH-M20x1.5-3-4-DGR	M20x1.5	3	round	-	-	4	PA 66	UL94 V-2	dark grey
OR-DL-MH-M20x1.5-3-4-GR	M20x1.5	3	round	-	-	4	PA 66	UL94 V-2	light grey
OR-DL-MH-M20x1.5-3-4-BLK	M20x1.5	3	round	-	-	4	PA 66	UL94 V-2	black
OR-DL-MH-M20x1.5-3-5-DGR	M20x1.5	3	round	-	-	5	PA 66	UL94 V-2	dark grey
OR-DL-MH-M20x1.5-3-5-GR	M20x1.5	3	round	-	-	5	PA 66	UL94 V-2	light grey
OR-DL-MH-M20x1.5-3-5-BLK	M20x1.5	3	round	-	-	5	PA 66	UL94 V-2	black
OR-DL-MH-M20x1.5-2-4-DGR	M20x1.5	2	round	-	-	4	PA 66	UL94 V-2	dark grey
OR-DL-MH-M20x1.5-2-4-GR	M20x1.5	2	round	-	-	4	PA 66	UL94 V-2	light grey
OR-DL-MH-M20x1.5-2-4-BLK	M20x1.5	2	round	-	-	4	PA 66	UL94 V-2	black
OR-DL-MH-M20x1.5-2-7-DGR	M20x1.5	2	round	-	-	7	PA 66	UL94 V-2	dark grey
OR-DL-MH-M20x1.5-2-7-GR	M20x1.5	2	round	-	-	7	PA 66	UL94 V-2	light grey
OR-DL-MH-M20x1.5-2-7-BLK	M20x1.5	2	round	-	-	7	PA 66	UL94 V-2	black
OR-DL-MH-M20x1.5-3-4-2-DGR	M20x1.5	3	round	-	-	4	PA 66	UL94 V-2	dark grey
OR-DL-MH-M20x1.5-3-4-2-GR	M20x1.5	3	round	-	-	4	PA 66	UL94 V-2	light grey
OR-DL-MH-M20x1.5-3-4-2-BLK	M20x1.5	3	round	-	-	4	PA 66	UL94 V-2	black
OR-DL-MH-M20x1.5-3-6-DGR	M20x1.5	3	round	-	-	6	PA 66	UL94 V-2	dark grey
OR-DL-MH-M20x1.5-3-6-GR	M20x1.5	3	round	-	-	6	PA 66	UL94 V-2	light grey
OR-DL-MH-M20x1.5-3-6-BLK	M20x1.5	3	round	-	-	6	PA 66	UL94 V-2	black
OR-DL-MH-M20x1.5-4-5-DGR	M20x1.5	4	round	-	-	5	PA 66	UL94 V-2	dark grey
OR-DL-MH-M20x1.5-4-5-GR	M20x1.5	4	round	-	-	5	PA 66	UL94 V-2	light grey
OR-DL-MH-M20x1.5-4-5-BLK	M20x1.5	4	round	-	-	5	PA 66	UL94 V-2	black
OR-DL-MH-M25x1.5-2-8-DGR	M25x1.5	2	round	-	-	8	PA 66	UL94 V-2	dark grey
OR-DL-MH-M25x1.5-2-8-GR	M25x1.5	2	round	-	-	8	PA 66	UL94 V-2	light grey
OR-DL-MH-M25x1.5-2-8-BLK	M25x1.5	2	round	-	-	8	PA 66	UL94 V-2	black
OR-DL-MH-M25x1.5-2-9-DGR	M25x1.5	2	round	-	-	9	PA 66	UL94 V-2	dark grey
OR-DL-MH-M25x1.5-2-9-GR	M25x1.5	2	round	-	-	9	PA 66	UL94 V-2	light grey
OR-DL-MH-M25x1.5-2-9-BLK	M25x1.5	2	round	-	-	9	PA 66	UL94 V-2	black
OR-DL-MH-M25x1.5-5-6-DGR	M25x1.5	5	round	-	-	6	PA 66	UL94 V-2	dark grey
OR-DL-MH-M25x1.5-5-6-GR	M25x1.5	5	round	-	-	6	PA 66	UL94 V-2	light grey
OR-DL-MH-M25x1.5-5-6-BLK	M25x1.5	5	round	-	-	6	PA 66	UL94 V-2	black
OR-DL-MH-M25x1.5-3-7-DGR	M25x1.5	3	round	-	-	7	PA 66	UL94 V-2	dark grey
OR-DL-MH-M25x1.5-3-7-GR	M25x1.5	3	round	-	-	7	PA 66	UL94 V-2	light grey
OR-DL-MH-M25x1.5-3-7-BLK	M25x1.5	3	round	-	-	7	PA 66	UL94 V-2	black
OR-DL-MH-M25x1.5-3-8-DGR	M25x1.5	3	round	-	-	8	PA 66	UL94 V-2	dark grey
OR-DL-MH-M25x1.5-3-8-GR	M25x1.5	3	round	-	-	8	PA 66	UL94 V-2	light grey
OR-DL-MH-M25x1.5-3-8-BLK	M25x1.5	3	round	-	-	8	PA 66	UL94 V-2	black
OR-DL-MH-M25x1.5-4-7-DGR	M25x1.5	4	round	-	-	7	PA 66	UL94 V-2	dark grey
OR-DL-MH-M25x1.5-4-7-GR	M25x1.5	4	round	-	-	7	PA 66	UL94 V-2	light grey
OR-DL-MH-M25x1.5-4-7-BLK	M25x1.5	4	round	-	-	7	PA 66	UL94 V-2	black
OR-DL-MH-M25x1.5-8-3-DGR	M25x1.5	8	round	-	-	3	PA 66	UL94 V-2	dark grey
OR-DL-MH-M25x1.5-8-3-GR	M25x1.5	8	round	-	-	3	PA 66	UL94 V-2	light grey
OR-DL-MH-M25x1.5-8-3-BLK	M25x1.5	8	round	-	-	3	PA 66	UL94 V-2	black
OR-DL-MH-M25x1.5-8-4-DGR	M25x1.5	8	round	-	-	4	PA 66	UL94 V-2	dark grey
OR-DL-MH-M25x1.5-8-4-GR	M25x1.5	8	round	-	-	4	PA 66	UL94 V-2	light grey

Symbol	Metric thread	Number of wires	Cable shape	Wire height A	Wire width B	Cable diameter C	Material	Flammability	Color
				[mm]	[mm]	[mm]			
OR-DL-MH-M25x1.5-8-4-BLK	M25x1.5	8	round	-	-	4	PA 66	UL94 V-2	black
OR-DL-MH-M32x1.5-4-9-DGR	M32x1.5	4	round	-	-	9	PA 66	UL94 V-2	dark grey
OR-DL-MH-M32x1.5-4-9-GR	M32x1.5	4	round	-	-	9	PA 66	UL94 V-2	light grey
OR-DL-MH-M32x1.5-4-9-BLK	M32x1.5	4	round	-	-	9	PA 66	UL94 V-2	black
OR-DL-MH-M32x1.5-16-3-DGR	M32x1.5	16	round	-	-	3	PA 66	UL94 V-2	dark grey
OR-DL-MH-M32x1.5-16-3-GR	M32x1.5	16	round	-	-	3	PA 66	UL94 V-2	light grey
OR-DL-MH-M32x1.5-16-3-BLK	M32x1.5	16	round	-	-	3	PA 66	UL94 V-2	black
OR-DL-MH-M40x1.5-6-8-DGR	M40x1.5	6	round	-	-	8	PA 66	UL94 V-2	dark grey
OR-DL-MH-M40x1.5-6-8-GR	M40x1.5	6	round	-	-	8	PA 66	UL94 V-2	light grey
OR-DL-MH-M40x1.5-6-8-BLK	M40x1.5	6	round	-	-	8	PA 66	UL94 V-2	black
OR-DL-FH-M20x1.5-DGR	M20x1.5	1	flat	7	13	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-M20x1.5-GR	M20x1.5	1	flat	7	13	-	PA 66	UL94 V-2	light grey
OR-DL-FH-M20x1.5-BLK	M20x1.5	1	flat	7	13	-	PA 66	UL94 V-2	black
OR-DL-FH-M25x1.5-DGR	M25x1.5	1	flat	7	15	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-M25x1.5-GR	M25x1.5	1	flat	7	15	-	PA 66	UL94 V-2	light grey
OR-DL-FH-M25x1.5-BLK	M25x1.5	1	flat	7	15	-	PA 66	UL94 V-2	black
OR-DL-FH-M32x1.5-DGR	M32x1.5	1	flat	8	22	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-M32x1.5-GR	M32x1.5	1	flat	8	22	-	PA 66	UL94 V-2	light grey
OR-DL-FH-M32x1.5-BLK	M32x1.5	1	flat	8	22	-	PA 66	UL94 V-2	black
OR-DL-FH-M40x1.5-DGR	M40x1.5	1	flat	10	28	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-M40x1.5-GR	M40x1.5	1	flat	10	28	-	PA 66	UL94 V-2	light grey
OR-DL-FH-M40x1.5-BLK	M40x1.5	1	flat	10	28	-	PA 66	UL94 V-2	black
OR-DL-FH-M50x1.5-DGR	M50x1.5	1	flat	12	33	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-M50x1.5-GR	M50x1.5	1	flat	12	33	-	PA 66	UL94 V-2	light grey
OR-DL-FH-M50x1.5-BLK	M50x1.5	1	flat	12	33	-	PA 66	UL94 V-2	black
OR-DL-FH-M63x1.5-DGR	M63x1.5	1	flat	14	45	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-M63x1.5-GR	M63x1.5	1	flat	14	45	-	PA 66	UL94 V-2	light grey
OR-DL-FH-M63x1.5-BLK	M63x1.5	1	flat	14	45	-	PA 66	UL94 V-2	black