


## OR-DL-MH-PG - Multihole and flathole cable glands

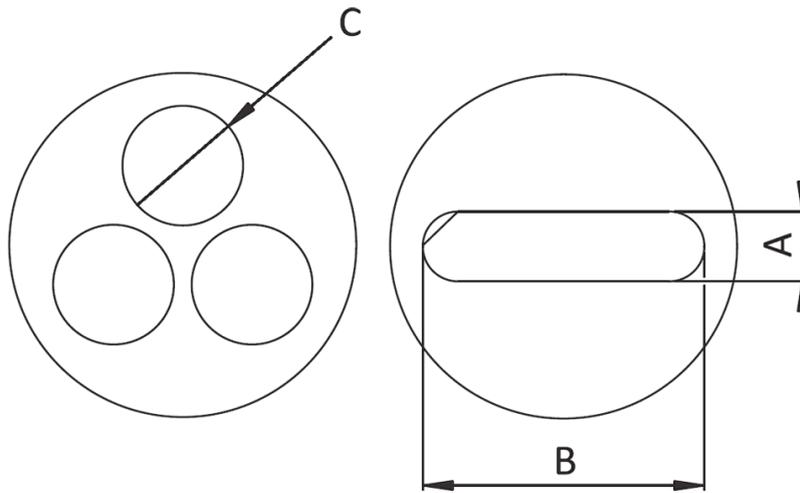

### OR-DL-MH

### OR-DL-FH

Details:

- **Body material: PA 66 V2**
- Colour: grey (RAL 7001), Light grey (RAL 7035), black (RAL 9005)
- Thread: PG (DIN 40430)
- Protection class: IP 65
- Working temperature: -30°C to +80°C (150°C short-term)
- Antivibration protection
- UV resistance
- Halogen free

Symbol	PG thread	Number of wires	Cable shape	Wire height A	Wire width B	Cable diameter C	Material	Flammability	Color
				[mm]	[mm]	[mm]			
OR-DL-MH-PG9-2-3-DGR	PG9	2	round	-	-	3	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG9-3-3-DGR	PG9	3	round	-	-	3	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG9-4-3-DGR	PG9	4	round	-	-	3	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG11-2-5-DGR	PG11	2	round	-	-	5	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG11-3-5-DGR	PG11	3	round	-	-	5	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG13.5-2-6-DGR	PG13.5	2	round	-	-	6	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG13.5-3-5-DGR	PG13.5	3	round	-	-	5	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG16-2-7-DGR	PG16	2	round	-	-	7	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG16-3-6-DGR	PG16	3	round	-	-	6	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG16-4-5-DGR	PG16	4	round	-	-	5	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG21-2-5-DGR	PG21	2	round	-	-	5	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG21-2-9-DGR	PG21	2	round	-	-	9	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG21-3-5-DGR	PG21	3	round	-	-	5	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG21-3-8-DGR	PG21	3	round	-	-	8	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG21-4-7-DGR	PG21	4	round	-	-	7	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG21-8-4-DGR	PG21	8	round	-	-	4	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG29-4-9-DGR	PG29	4	round	-	-	9	PA 66	UL94 V-2	dark grey
OR-DL-MH-PG29-16-3-DGR	PG29	16	round	-	-	3	PA 66	UL94 V-2	dark grey

Symbol	PG thread	Number of wires	Cable shape	Wire height A	Wire width B	Cable diameter C	Material	Flammability	Color
				[mm]	[mm]	[mm]			
OR-DL-MH-PG9-2-3-BLK	PG9	2	round	-	-	3	PA 66	UL94 V-2	black
OR-DL-MH-PG9-3-3-BLK	PG9	3	round	-	-	3	PA 66	UL94 V-2	black
OR-DL-MH-PG9-4-3-BLK	PG9	4	round	-	-	3	PA 66	UL94 V-2	black
OR-DL-MH-PG11-2-5-BLK	PG11	2	round	-	-	5	PA 66	UL94 V-2	black
OR-DL-MH-PG11-3-5-BLK	PG11	3	round	-	-	5	PA 66	UL94 V-2	black
OR-DL-MH-PG13.5-2-6-BLK	PG13.5	2	round	-	-	6	PA 66	UL94 V-2	black
OR-DL-MH-PG13.5-3-5-BLK	PG13.5	3	round	-	-	5	PA 66	UL94 V-2	black
OR-DL-MH-PG16-2-7-BLK	PG16	2	round	-	-	7	PA 66	UL94 V-2	black
OR-DL-MH-PG16-3-6-BLK	PG16	3	round	-	-	6	PA 66	UL94 V-2	black
OR-DL-MH-PG16-4-5-BLK	PG16	4	round	-	-	5	PA 66	UL94 V-2	black
OR-DL-MH-PG21-2-5-BLK	PG21	2	round	-	-	5	PA 66	UL94 V-2	black
OR-DL-MH-PG21-2-9-BLK	PG21	2	round	-	-	9	PA 66	UL94 V-2	black
OR-DL-MH-PG21-3-5-BLK	PG21	3	round	-	-	5	PA 66	UL94 V-2	black
OR-DL-MH-PG21-3-8-BLK	PG21	3	round	-	-	8	PA 66	UL94 V-2	black
OR-DL-MH-PG21-4-7-BLK	PG21	4	round	-	-	7	PA 66	UL94 V-2	black
OR-DL-MH-PG21-8-4-BLK	PG21	8	round	-	-	4	PA 66	UL94 V-2	black
OR-DL-MH-PG29-4-9-BLK	PG29	4	round	-	-	9	PA 66	UL94 V-2	black
OR-DL-MH-PG29-16-3-BLK	PG29	16	round	-	-	3	PA 66	UL94 V-2	black
OR-DL-MH-PG9-2-3-GR	PG9	2	round	-	-	3	PA 66	UL94 V-2	light grey
OR-DL-MH-PG9-3-3-GR	PG9	3	round	-	-	3	PA 66	UL94 V-2	light grey
OR-DL-MH-PG9-4-3-GR	PG9	4	round	-	-	3	PA 66	UL94 V-2	light grey
OR-DL-MH-PG11-2-5-GR	PG11	2	round	-	-	5	PA 66	UL94 V-2	light grey
OR-DL-MH-PG11-3-5-GR	PG11	3	round	-	-	5	PA 66	UL94 V-2	light grey
OR-DL-MH-PG13.5-2-6-GR	PG13.5	2	round	-	-	6	PA 66	UL94 V-2	light grey
OR-DL-MH-PG13.5-3-5-GR	PG13.5	3	round	-	-	5	PA 66	UL94 V-2	light grey
OR-DL-MH-PG16-2-7-GR	PG16	2	round	-	-	7	PA 66	UL94 V-2	light grey
OR-DL-MH-PG16-3-6-GR	PG16	3	round	-	-	6	PA 66	UL94 V-2	light grey
OR-DL-MH-PG16-4-5-GR	PG16	4	round	-	-	5	PA 66	UL94 V-2	light grey
OR-DL-MH-PG21-2-5-GR	PG21	2	round	-	-	5	PA 66	UL94 V-2	light grey
OR-DL-MH-PG21-2-9-GR	PG21	2	round	-	-	9	PA 66	UL94 V-2	light grey
OR-DL-MH-PG21-3-5-GR	PG21	3	round	-	-	5	PA 66	UL94 V-2	light grey
OR-DL-MH-PG21-3-8-GR	PG21	3	round	-	-	8	PA 66	UL94 V-2	light grey
OR-DL-MH-PG21-4-7-GR	PG21	4	round	-	-	7	PA 66	UL94 V-2	light grey
OR-DL-MH-PG21-8-4-GR	PG21	8	round	-	-	4	PA 66	UL94 V-2	light grey
OR-DL-MH-PG29-4-9-GR	PG29	4	round	-	-	9	PA 66	UL94 V-2	light grey
OR-DL-MH-PG29-16-3-GR	PG29	16	round	-	-	3	PA 66	UL94 V-2	light grey
OR-DL-FH-PG16-DGR	PG16	1	flat	7	13	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-PG21-DGR	PG21	1	flat	5	17	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-PG29-DGR	PG29	1	flat	8	22	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-PG36-DGR	PG36	1	flat	10	28	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-PG36A-DGR	PG36	1	flat	5.5	28	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-PG42-DGR	PG42	1	flat	12	33	-	PA 66	UL94 V-2	dark grey
OR-DL-FH-PG16-BLK	PG16	1	flat	7	13	-	PA 66	UL94 V-2	black
OR-DL-FH-PG21-BLK	PG21	1	flat	5	17	-	PA 66	UL94 V-2	black
OR-DL-FH-PG29-BLK	PG29	1	flat	8	22	-	PA 66	UL94 V-2	black
OR-DL-FH-PG36-BLK	PG36	1	flat	10	28	-	PA 66	UL94 V-2	black
OR-DL-FH-PG36A-BLK	PG36	1	flat	5.5	28	-	PA 66	UL94 V-2	black
OR-DL-FH-PG42-BLK	PG42	1	flat	12	33	-	PA 66	UL94 V-2	black
OR-DL-FH-PG16-GR	PG16	1	flat	7	13	-	PA 66	UL94 V-2	light grey
OR-DL-FH-PG21-GR	PG21	1	flat	5	17	-	PA 66	UL94 V-2	light grey
OR-DL-FH-PG29-GR	PG29	1	flat	8	22	-	PA 66	UL94 V-2	light grey
OR-DL-FH-PG36-GR	PG36	1	flat	10	28	-	PA 66	UL94 V-2	light grey
OR-DL-FH-PG36A-GR	PG36	1	flat	5.5	28	-	PA 66	UL94 V-2	light grey

Symbol	PG thread	Number of wires	Cable shape	Wire height A	Wire width B	Cable diameter C	Material	Flammability	Color
				[mm]	[mm]	[mm]			
OR-DL-FH-PG42-GR	PG42	1	flat	12	33	-	PA 66	UL94 V-2	light grey