
**IP Kontakt**
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

# OR-DL-WM-M - Metal cable glands, ventilated, metric thread



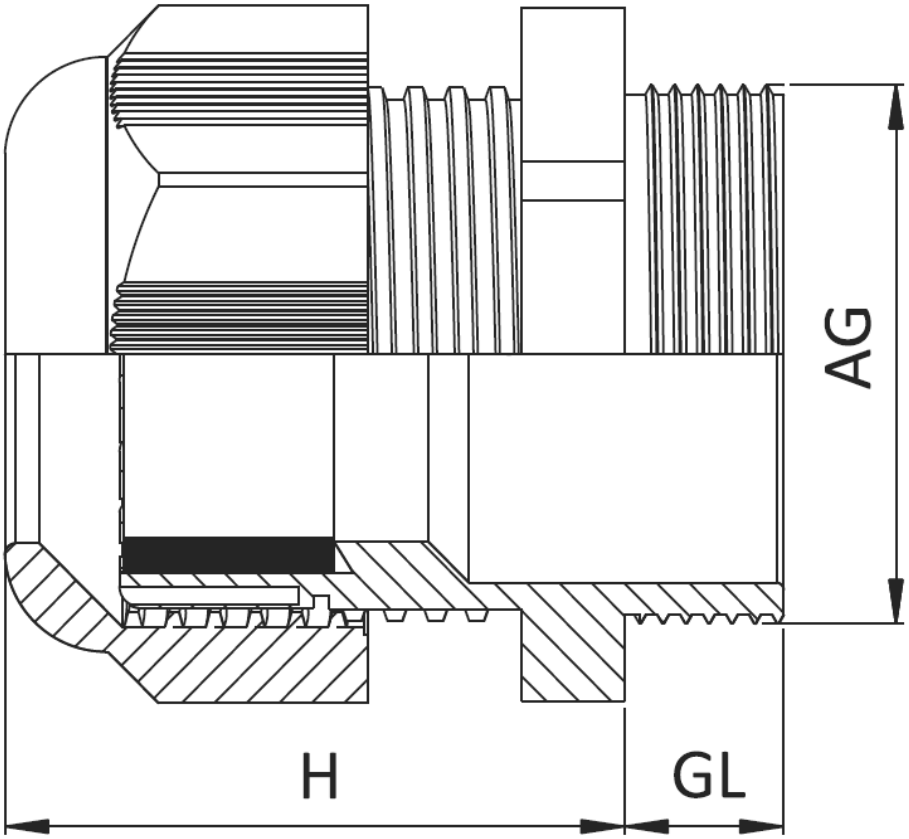


Details:

- **Body material: brass with/without nickel plated / AISI303/316L Stainless Steel**
- **Plastic part: PA6 V2 / V0**
- **Sealing: TPV / Silicone**
- **O-ring: NBR / EPDM / Silicone**
- **Vent part: Acrylic Co-Polymer on Nylon Support (Hydrophobic-Oleophobic)**
- **Protection class: IP68**
- **Temperature Range: -40 ºC +105 ºC**
- Prevents the pressure inside the device to increase
- Prevents heat rise by providing air circulation
- Minimizes or even eliminates negative effects due to humidity in the environment
- Minimizes periodic cleaning costs by eliminating condensation and evaporation problems due to relative humidity in LED fittings and connection boxes
- Extends the life of the device

| Symbol | Metric thread | H | Thread length GL | Wrench size SW | Mounting hole diameter | Cable diameter range | Material |
|---|---|---|---|---|---|---|---|
| | | [mm] | [mm] | [mm] | [mm] | [mm] | |
| OR-DL-WMB-M12x1.5 | M12×1.5 | 31.5 | 6 | 17 | 12.3 | 4 - 8 | brass |
| OR-DL-WMS-M12x1.5 | M12×1.5 | 31.5 | 6 | 17 | 12.3 | 4 - 8 | stainless steel |
| OR-DL-WMB-M12x1.5-L | M12×1.5 | 31.5 | 8 | 17 | 12.3 | 4 - 8 | brass |
| OR-DL-WMS-M12x1.5-L | M12×1.5 | 31.5 | 8 | 17 | 12.3 | 4 - 8 | stainless steel |
| OR-DL-WMB-M16x1.5-R | M16×1.5 | 31.5 | 6 | 17 | 16.3 | 4 - 8 | brass |

| Symbol | Metric thread | H | Thread length GL | Wrench size SW | Mounting hole diameter | Cable diameter range | Material |
|---|---|---|---|---|---|---|---|
| | | [mm] | [mm] | [mm] | [mm] | [mm] | |
| OR-DL-WMS-M16x1.5-R | M16×1.5 | 31.5 | 6 | 17 | 16.3 | 4 - 8 | stainless steel |
| OR-DL-WMB-M16x1.5-RL | M16×1.5 | 31.5 | 8 | 17 | 16.3 | 4 - 8 | brass |
| OR-DL-WMS-M16x1.5-RL | M16×1.5 | 31.5 | 8 | 17 | 16.3 | 4 - 8 | stainless steel |
| OR-DL-WMB-M16x1.5 | M16×1.5 | 31.5 | 6 | 20 | 16.3 | 5 - 10 | brass |
| OR-DL-WMS-M16x1.5 | M16×1.5 | 31.5 | 6 | 20 | 16.3 | 5 - 10 | stainless steel |
| OR-DL-WMB-M16x1.5-L | M16×1.5 | 31.5 | 8 | 20 | 16.3 | 5 - 10 | brass |
| OR-DL-WMS-M16x1.5-L | M16×1.5 | 31.5 | 8 | 20 | 16.3 | 5 - 10 | stainless steel |
| OR-DL-WMB-M20x1.5 | M20×1.5 | 35 | 8 | 22 | 20.3 | 6 - 12 | brass |
| OR-DL-WMS-M20x1.5 | M20×1.5 | 35 | 8 | 22 | 20.3 | 6 - 12 | stainless steel |