


OR-DL-WP-M - Plastic cable glands, ventilated, metric

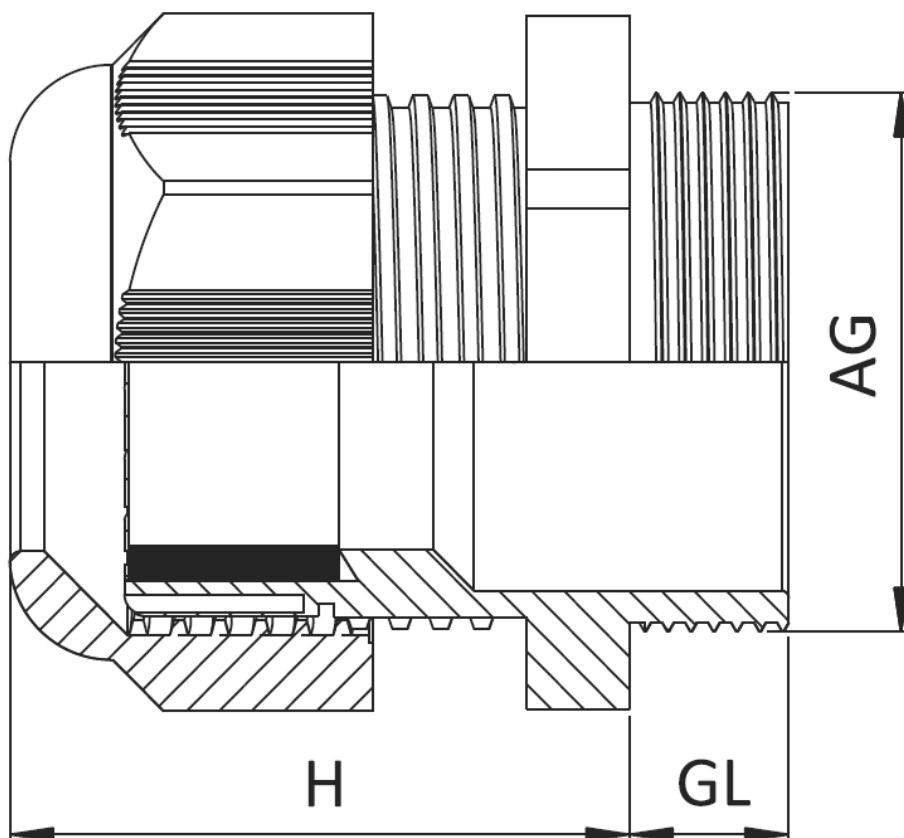

Details:

- **Body material: PA6**
- **Membrane material: Hydrophobic - Oleophobic**
- **O-ring material: NBR / EPDM**
- **Gasket material: thermoplastic vulcanized TPV**
- **Colour: RAL 7001 (Gray), RAL 7035 (Light Gray) or RAL 9005 (Black)**
- Thread: metric EN 60423
- Protection: IP68
- Continuous heat resistance: -30°C to +80°C
- Short term heat resistance: +150 ° C
- Prevents the pressure inside the device to increase
- Prevents heat rise by providing air circulation
- Minimizes or even eliminates negative effects due to humidity in the environment
- Minimizes periodic cleaning costs by eliminating condensation and evaporation problems due to relative humidity in LED fittings and connection boxes
- Extends the life of the device
- Average air flow: 70 l/h
- Water intrusion: 0.1 bar

Symbol	Metric thread AG	H	Thread length GL	Wrench size	Cable diameter range	Mounting hole diameter	Material	Color
		[mm]	[mm]					
OR-DL-WP-M12x1.5-LGR	M12X1.5	29	8	15	4 - 6.5	12.3	PA 6	light grey

Symbol	Metric thread AG	H	Thread length GL	Wrench size	Cable diameter range	Mounting hole diameter	Material	Color
		[mm]	[mm]	[mm]	[mm]	[mm]		
OR-DL-WP-M12x1.5-BLK	M12×1.5	29	8	15	4 - 6.5	12.3	PA 6	black
OR-DL-WP-M16x1.5-LGR	M16×1.5	33	8	19	4 - 8	16.3	PA 6	light grey
OR-DL-WP-M16x1.5-BLK	M16×1.5	33	8	19	4 - 8	16.3	PA 6	black
OR-DL-WP-M16x1.5-W-LGR	M16×1.5	34	10	22	5 - 10	16.3	PA 6	light grey
OR-DL-WP-M16x1.5-W-BLK	M16×1.5	34	10	22	5 - 10	16.3	PA 6	black
OR-DL-WP-M20x1.5-LGR	M20×1.5	40.5	10	24	4 - 10	20.3	PA 6	light grey
OR-DL-WP-M20x1.5-BLK	M20×1.5	40.5	10	24	4 - 10	20.3	PA 6	black
OR-DL-WP-M20x1.5-L-LGR	M20×1.5	40.5	10	24	6 - 12	20.3	PA 6	light grey
OR-DL-WP-M20x1.5-L-BLK	M20×1.5	40.5	10	24	6 - 12	20.3	PA 6	black