


OR-DL-WP-PG - Plastic cable glands, ventilated, PG thread

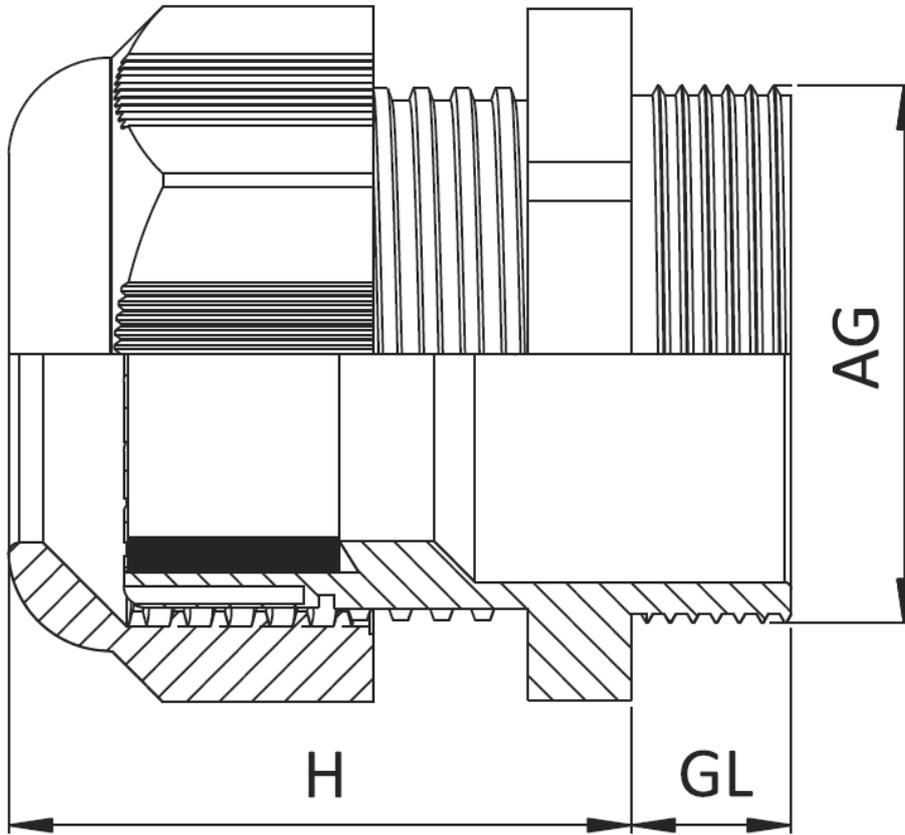

Details:

- **Body material: PA6**
- **Membrane material: Hydrophobic - Oleophobic**
- **O-ring material: NBR / EPDM**
- **Gasket material: thermoplastic vulcanized TPV**
- **Colour: RAL 7001 (Gray), RAL 7035 (Light Gray) or RAL 9005 (Black)**
- Thread: PG, DIN 40430
- Protection: IP68
- Continuous heat resistance: -30°C to +80°C
- Short term heat resistance: +150 ° C
- Prevents the pressure inside the device to increase
- Prevents heat rise by providing air circulation
- Minimizes or even eliminates negative effects due to humidity in the environment
- Minimizes periodic cleaning costs by eliminating condensation and evaporation problems due to relative humidity in LED fittings and connection boxes
- Extends the life of the device
- Average air flow: 70 l/h
- Water intrusion: 0.1 mbar

Symbol	PG thread AG	H	Thread length GL	Wrench size	Cable diameter range	Mounting hole diameter	Material	Color
		[mm]	[mm]	[mm]	[mm]	[mm]		
OR-DL-WP-PG7-LGR	PG7	29	8	15	4 - 8	13	PA 6	light grey
OR-DL-WP-PG7-BLK	PG7	29	8	15	4 - 8	13	PA 6	black

Symbol	PG thread AG	H	Thread length GL	Wrench size	Cable diameter range	Mounting hole diameter	Material	Color
		[mm]	[mm]	[mm]	[mm]	[mm]		
OR-DL-WP-PG9-LGR	PG9	33	8	19	4 - 8	13	PA 6	light grey
OR-DL-WP-PG9-BLK	PG9	33	8	19	4 - 8	13	PA 6	black
OR-DL-WP-PG11-LGR	PG11	34	10	22	5 - 10	19	PA 6	light grey
OR-DL-WP-PG11-BLK	PG11	34	10	22	5 - 10	19	PA 6	black
OR-DL-WP-PG13.5-LGR	PG13.5	34	10	24	4 - 10	21	PA 6	light grey
OR-DL-WP-PG13.5-BLK	PG13.5	34	10	24	4 - 10	21	PA 6	black
OR-DL-WP-PG13.5-L-LGR	PG13.5	34	10	24	6 - 12	21	PA 6	light grey
OR-DL-WP-PG13.5-L-BLK	PG13.5	34	10	24	6 - 12	21	PA 6	black