
**IP Kontakt**
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

# OR-DL-WP-PG - Plastic cable glands, ventilated, PG thread



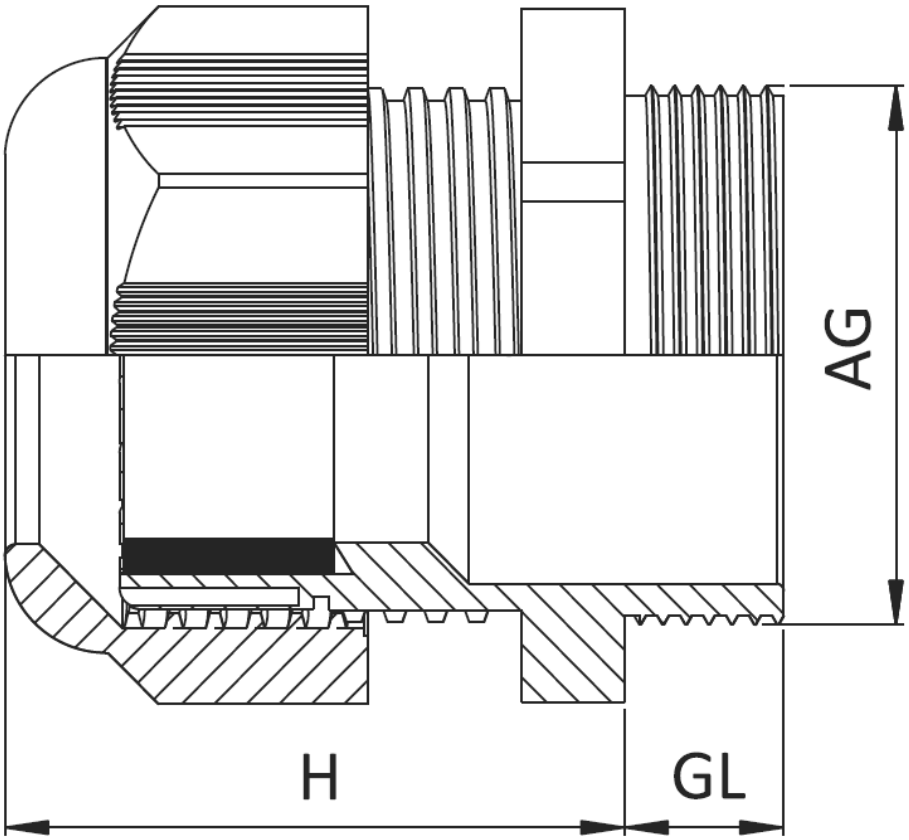


Details:

- **Body material: PA6**
- **Membrane material: Hydrophobic - Oleophobic**
- **O-ring material: NBR / EPDM**
- **Gasket material: thermoplastic vulcanized TPV**
- **Colour: RAL 7001 (Gray), RAL 7035 (Light Gray) or RAL 9005 (Black)**
- Thread: PG, DIN 40430
- Protection: IP68
- Continuous heat resistance: -30°C to +80°C
- Short term heat resistance: +150 ° C
- Prevents the pressure inside the device to increase
- Prevents heat rise by providing air circulation
- Minimizes or even eliminates negative effects due to humidity in the environment
- Minimizes periodic cleaning costs by eliminating condensation and evaporation problems due to relative humidity in LED fittings and connection boxes
- Extends the life of the device
- Average air flow: 70 l/h
- Water intrusion: 0.1 mbar

| Symbol | PG thread AG | H | Thread length GL | Wrench size | Cable diameter range | Mounting hole diameter | Material | Color |
|---|---|---|---|---|---|---|---|---|
| | | [mm] | [mm] | [mm] | [mm] | [mm] | | |
| OR-DL-WP-PG7-LGR | PG7 | 29 | 8 | 15 | 4 - 8 | 13 | PA 6 | light grey |
| OR-DL-WP-PG7-BLK | PG7 | 29 | 8 | 15 | 4 - 8 | 13 | PA 6 | black |

| Symbol | PG thread AG | H | Thread length GL | Wrench size | Cable diameter range | Mounting hole diameter | Material | Color |
|---|---|---|---|---|---|---|---|---|
| | | [mm] | [mm] | [mm] | [mm] | [mm] | | |
| OR-DL-WP-PG9-LGR | PG9 | 33 | 8 | 19 | 4 - 8 | 13 | PA 6 | light grey |
| OR-DL-WP-PG9-BLK | PG9 | 33 | 8 | 19 | 4 - 8 | 13 | PA 6 | black |
| OR-DL-WP-PG11-LGR | PG11 | 34 | 10 | 22 | 5 - 10 | 19 | PA 6 | light grey |
| OR-DL-WP-PG11-BLK | PG11 | 34 | 10 | 22 | 5 - 10 | 19 | PA 6 | black |
| OR-DL-WP-PG13.5-LGR | PG13.5 | 34 | 10 | 24 | 4 - 10 | 21 | PA 6 | light grey |
| OR-DL-WP-PG13.5-BLK | PG13.5 | 34 | 10 | 24 | 4 - 10 | 21 | PA 6 | black |
| OR-DL-WP-PG13.5-L-LGR | PG13.5 | 34 | 10 | 24 | 6 - 12 | 21 | PA 6 | light grey |
| OR-DL-WP-PG13.5-L-BLK | PG13.5 | 34 | 10 | 24 | 6 - 12 | 21 | PA 6 | black |