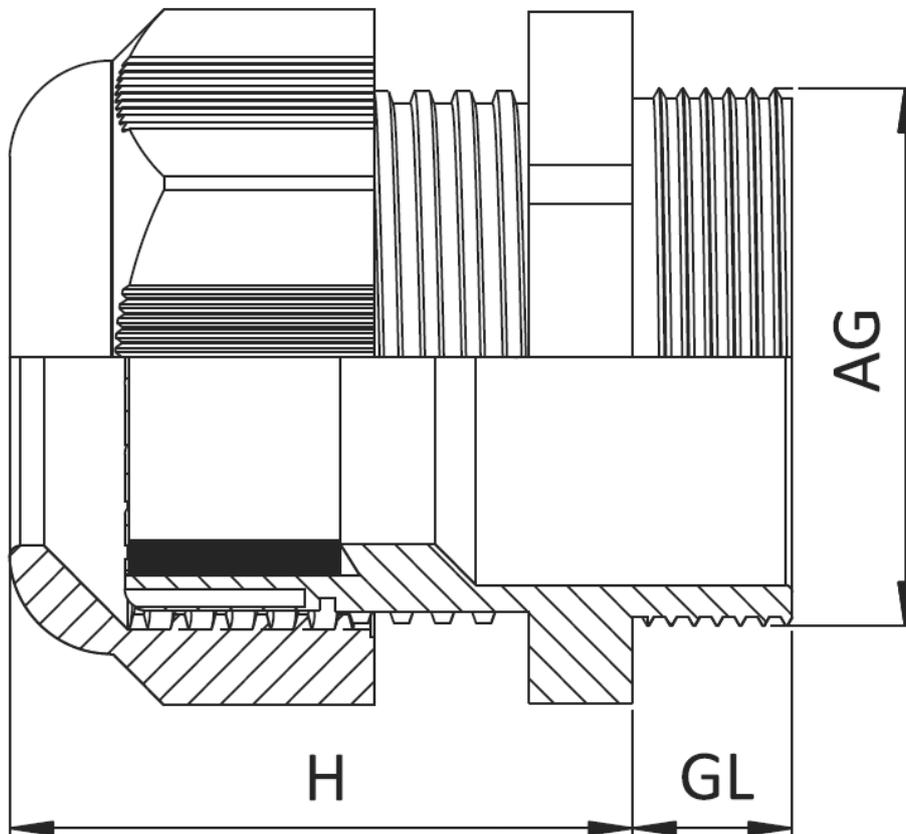


**OR-DLA-M - Nylon cable gland with metric thread****Details:**

- **Body material:** PA 6
- **Flammability:** UL94 V-2
- **Colour:**
  - dark grey (RAL 7001)
  - light grey (RAL 7035)
  - black (RAL 9005)
- **Thread:** metric (EN 60423)
- **Protection class:** IP 68 5 bar
- **Working temperature:** -30°C to +80°C (150°C short-term)
- EN 50262 VDE
- Antivibration protection
- UV resistance
- Halogen free
- Type 1: standard version
- Type 2: long version

Symbol	Type	Metric thread AG	H	Thread length GL	Wrench size	Cable diameter range	Material	Flammability	Color
			[mm]	[mm]	[mm]	[mm]			
OR-DLA-M12-BLK	1	M12×1.5	24	8	15	3 - 6.5	PA 6	UL94 V-2	black
OR-DLA-M12-DGR	1	M12×1.5	24	8	15	3 - 6.5	PA 6	UL94 V-2	dark grey
OR-DLA-M12-GR	1	M12×1.5	24	8	15	3 - 6.5	PA 6	UL94 V-2	light grey
OR-DLA-M16-2-BLK	1	M16×1.5	28	8	19	4 - 8	PA 6	UL94 V-2	black
OR-DLA-M16-2-DGR	1	M16×1.5	28	8	19	4 - 8	PA 6	UL94 V-2	dark grey
OR-DLA-M16-2-GR	1	M16×1.5	28	8	19	4 - 8	PA 6	UL94 V-2	light grey
OR-DLA-M16-BLK	1	M16×1.5	29	10	22	5 - 10	PA 6	UL94 V-2	black
OR-DLA-M16-DGR	1	M16×1.5	29	10	22	5 - 10	PA 6	UL94 V-2	dark grey
OR-DLA-M16-GR	1	M16×1.5	29	10	22	5 - 10	PA 6	UL94 V-2	light grey
OR-DLA-M20-2-BLK	1	M20×1.5	29	10	24	4 - 10	PA 6	UL94 V-2	black
OR-DLA-M20-BLK	1	M20×1.5	29	10	24	6 - 12	PA 6	UL94 V-2	black
OR-DLA-M20-2-DGR	1	M20×1.5	29	10	24	4 - 10	PA 6	UL94 V-2	dark grey
OR-DLA-M20-DGR	1	M20×1.5	29	10	24	6 - 12	PA 6	UL94 V-2	dark grey
OR-DLA-M20-2-GR	1	M20×1.5	29	10	24	4 - 10	PA 6	UL94 V-2	light grey
OR-DLA-M20-GR	1	M20×1.5	29	10	24	6 - 12	PA 6	UL94 V-2	light grey
OR-DLA-M20-3-BLK	1	M20×1.5	33	10	27	10 - 14	PA 6	UL94 V-2	black
OR-DLA-M20-3-DGR	1	M20×1.5	33	10	27	10 - 14	PA 6	UL94 V-2	dark grey
OR-DLA-M20-3-GR	1	M20×1.5	33	10	27	10 - 14	PA 6	UL94 V-2	light grey
OR-DLA-M25-BLK	1	M25×1.5	38	10	33	13 - 18	PA 6	UL94 V-2	black
OR-DLA-M25-2-BLK	1	M25×1.5	38	10	33	9 - 17	PA 6	UL94 V-2	black
OR-DLA-M25-DGR	1	M25×1.5	38	10	33	13 - 18	PA 6	UL94 V-2	dark grey
OR-DLA-M25-2-DGR	1	M25×1.5	38	10	33	9 - 17	PA 6	UL94 V-2	dark grey
OR-DLA-M25-GR	1	M25×1.5	38	10	33	13 - 18	PA 6	UL94 V-2	light grey
OR-DLA-M25-2-GR	1	M25×1.5	38	10	33	9 - 17	PA 6	UL94 V-2	light grey
OR-DLA-M32-BLK	1	M32×1.5	41	10	42	18 - 25	PA 6	UL94 V-2	black
OR-DLA-M32-DGR	1	M32×1.5	41	10	42	18 - 25	PA 6	UL94 V-2	dark grey
OR-DLA-M32-GR	1	M32×1.5	41	10	42	18 - 25	PA 6	UL94 V-2	light grey
OR-DLA-M40-BLK	1	M40×1.5	51	10	53	22 - 32	PA 6	UL94 V-2	black
OR-DLA-M40-DGR	1	M40×1.5	51	10	53	22 - 32	PA 6	UL94 V-2	dark grey
OR-DLA-M40-GR	1	M40×1.5	51	10	53	22 - 32	PA 6	UL94 V-2	light grey
OR-DLA-M50-BLK	1	M50×1.5	53	18	60	30 - 38	PA 6	UL94 V-2	black
OR-DLA-M50-DGR	1	M50×1.5	53	18	60	30 - 38	PA 6	UL94 V-2	dark grey
OR-DLA-M50-GR	1	M50×1.5	53	18	60	30 - 38	PA 6	UL94 V-2	light grey
OR-DLA-M63-BLK	1	M63×1.5	55	18	70	34 - 44	PA 6	UL94 V-2	black
OR-DLA-M63-DGR	1	M63×1.5	55	18	70	34 - 44	PA 6	UL94 V-2	dark grey
OR-DLA-M63-GR	1	M63×1.5	55	18	70	34 - 44	PA 6	UL94 V-2	light grey
OR-DLA-M12L-BLK	2	M12×1.5	24	15	15	3 - 6.5	PA 6	UL94 V-2	black
OR-DLA-M12L-DGR	2	M12×1.5	24	15	15	3 - 6.5	PA 6	UL94 V-2	dark grey
OR-DLA-M12L-GR	2	M12×1.5	24	15	15	3 - 6.5	PA 6	UL94 V-2	light grey
OR-DLA-M16L-2-BLK	2	M16×1.5	28	15	19	4 - 8	PA 6	UL94 V-2	black
OR-DLA-M16L-2-DGR	2	M16×1.5	28	15	19	4 - 8	PA 6	UL94 V-2	dark grey
OR-DLA-M16L-2-GR	2	M16×1.5	28	15	19	4 - 8	PA 6	UL94 V-2	light grey
OR-DLA-M16L-BLK	2	M16×1.5	29	15	22	5 - 10	PA 6	UL94 V-2	black
OR-DLA-M16L-DGR	2	M16×1.5	29	15	22	5 - 10	PA 6	UL94 V-2	dark grey
OR-DLA-M16L-GR	2	M16×1.5	29	15	22	5 - 10	PA 6	UL94 V-2	light grey
OR-DLA-M20L-BLK	2	M20×1.5	29	15	24	4 - 10	PA 6	UL94 V-2	black
OR-DLA-M20L-2-BLK	2	M20×1.5	29	15	24	6 - 12	PA 6	UL94 V-2	black
OR-DLA-M20L-DGR	2	M20×1.5	29	15	24	4 - 10	PA 6	UL94 V-2	dark grey
OR-DLA-M20L-2-DGR	2	M20×1.5	29	15	24	6 - 12	PA 6	UL94 V-2	dark grey
OR-DLA-M20L-GR	2	M20×1.5	29	15	24	4 - 10	PA 6	UL94 V-2	light grey
OR-DLA-M20L-2-GR	2	M20×1.5	29	15	24	6 - 12	PA 6	UL94 V-2	light grey
OR-DLA-M20L-3-BLK	2	M20×1.5	33	15	27	10 - 14	PA 6	UL94 V-2	black
OR-DLA-M20L-3-DGR	2	M20×1.5	33	15	27	10 - 14	PA 6	UL94 V-2	dark grey

Symbol	Type	Metric thread AG	H	Thread length GL	Wrench size	Cable diameter range	Material	Flammability	Color
			[mm]	[mm]	[mm]	[mm]			
OR-DLA-M20L-3-GR	2	M20×1.5	33	15	27	10 - 14	PA 6	UL94 V-2	light grey
OR-DLA-M25L-BLK	2	M25×1.5	38	15	33	13 - 18	PA 6	UL94 V-2	black
OR-DLA-M25L-DGR	2	M25×1.5	38	15	33	13 - 18	PA 6	UL94 V-2	dark grey
OR-DLA-M25L-GR	2	M25×1.5	38	15	33	13 - 18	PA 6	UL94 V-2	light grey
OR-DLA-M32L-BLK	2	M32×1.5	41	18	42	18 - 25	PA 6	UL94 V-2	black
OR-DLA-M32L-DGR	2	M32×1.5	41	18	42	18 - 25	PA 6	UL94 V-2	dark grey
OR-DLA-M32L-GR	2	M32×1.5	41	18	42	18 - 25	PA 6	UL94 V-2	light grey
OR-DLA-M40L-BLK	2	M40×1.5	51	18	53	22 - 32	PA 6	UL94 V-2	black
OR-DLA-M40L-DGR	2	M40×1.5	51	18	53	22 - 32	PA 6	UL94 V-2	dark grey
OR-DLA-M40L-GR	2	M40×1.5	51	18	53	22 - 32	PA 6	UL94 V-2	light grey