


OR-DLA-PG - Nylon cable gland with PG thread

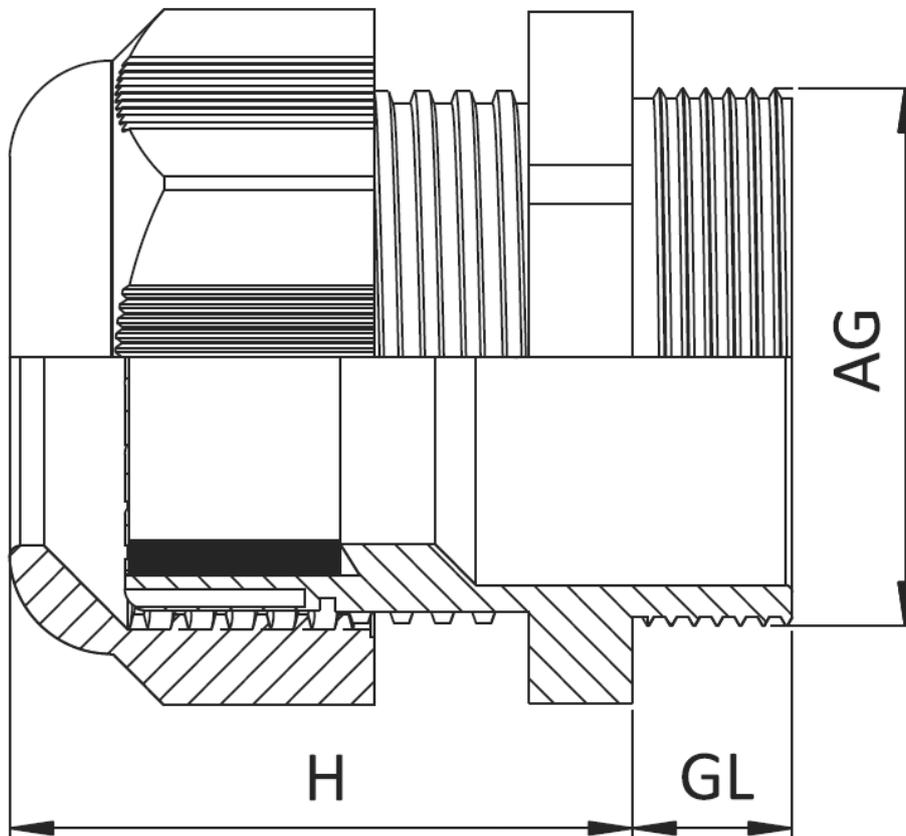

Details:

- **Body material: PA 6 V2**
- Colour:
 - grey (RAL 7001)
 - light grey (RAL 7035)
 - black (RAL 9005)
- Thread: PG (DIN 40430)
- Protection class: IP 68 5 bar
- Working temperature: -30°C to +80°C (150°C short-term)
- Antivibration protection
- UV resistance
- Halogen free
- Type 1: standard version
- Type 2: long version

Symbol	Type	PG thread AG	H	Thread length GL	Wrench size	Cable diameter range	Material	Flammability	Color
			[mm]	[mm]	[mm]	[mm]			
OR-DLA-PG7-DGR	1	PG7	24	8	15	3 - 6.5	PA 6	UL94 V-2	dark grey
OR-DLA-PG9-DGR	1	PG9	28	8	19	4 - 8	PA 6	UL94 V-2	dark grey
OR-DLA-PG11-DGR	1	PG11	29	8	22	5 - 10	PA 6	UL94 V-2	dark grey
OR-DLA-PG13.5-2-DGR	1	PG13.5	29	9	24	4 - 10	PA 6	UL94 V-2	dark grey
OR-DLA-PG13.5-DGR	1	PG13.5	29	9	24	6 - 12	PA 6	UL94 V-2	dark grey
OR-DLA-PG16-DGR	1	PG16	33	9	27	10 - 14	PA 6	UL94 V-2	dark grey
OR-DLA-PG21-DGR	1	PG21	38	11	33	13 - 18	PA 6	UL94 V-2	dark grey
OR-DLA-PG29-DGR	1	PG29	41	11	42	18 - 25	PA 6	UL94 V-2	dark grey
OR-DLA-PG36-DGR	1	PG36	51	13	53	22 - 32	PA 6	UL94 V-2	dark grey
OR-DLA-PG42-DGR	1	PG42	53	13	60	30 - 38	PA 6	UL94 V-2	dark grey
OR-DLA-PG48-DGR	1	PG48	55	14	65	34 - 44	PA 6	UL94 V-2	dark grey
OR-DLA-PG7-GR	1	PG7	24	8	15	3 - 6.5	PA 6	UL94 V-2	light grey
OR-DLA-PG9-GR	1	PG9	28	8	19	4 - 8	PA 6	UL94 V-2	light grey
OR-DLA-PG11-GR	1	PG11	29	8	22	5 - 10	PA 6	UL94 V-2	light grey
OR-DLA-PG13.5-2-GR	1	PG13.5	29	9	24	4 - 10	PA 6	UL94 V-2	light grey
OR-DLA-PG13.5-GR	1	PG13.5	29	9	24	6 - 12	PA 6	UL94 V-2	light grey
OR-DLA-PG16-GR	1	PG16	33	9	27	10 - 14	PA 6	UL94 V-2	light grey
OR-DLA-PG21-GR	1	PG21	38	11	33	13 - 18	PA 6	UL94 V-2	light grey
OR-DLA-PG29-GR	1	PG29	41	11	42	18 - 25	PA 6	UL94 V-2	light grey
OR-DLA-PG36-GR	1	PG36	51	13	53	22 - 32	PA 6	UL94 V-2	light grey
OR-DLA-PG42-GR	1	PG42	53	13	60	30 - 38	PA 6	UL94 V-2	light grey
OR-DLA-PG48-GR	1	PG48	55	14	65	34 - 44	PA 6	UL94 V-2	light grey
OR-DLA-PG7-BLK	1	PG7	24	8	15	3 - 6.5	PA 6	UL94 V-2	black
OR-DLA-PG9-BLK	1	PG9	28	8	19	4 - 8	PA 6	UL94 V-2	black
OR-DLA-PG11-BLK	1	PG11	29	8	22	5 - 10	PA 6	UL94 V-2	black
OR-DLA-PG13.5-2-BLK	1	PG13.5	29	9	24	4 - 10	PA 6	UL94 V-2	black
OR-DLA-PG13.5-BLK	1	PG13.5	29	9	24	6 - 12	PA 6	UL94 V-2	black
OR-DLA-PG16-BLK	1	PG16	33	9	27	10 - 14	PA 6	UL94 V-2	black
OR-DLA-PG21-BLK	1	PG21	38	11	33	13 - 18	PA 6	UL94 V-2	black
OR-DLA-PG29-BLK	1	PG29	41	11	42	18 - 25	PA 6	UL94 V-2	black
OR-DLA-PG36-BLK	1	PG36	51	13	53	22 - 32	PA 6	UL94 V-2	black
OR-DLA-PG42-BLK	1	PG42	53	13	60	30 - 38	PA 6	UL94 V-2	black
OR-DLA-PG48-BLK	1	PG48	55	14	65	34 - 44	PA 6	UL94 V-2	black
OR-DLA-PG7L-DGR	2	PG7	24	15	15	3 - 6.5	PA 6	UL94 V-2	dark grey
OR-DLA-PG9L-DGR	2	PG9	28	15	19	4 - 8	PA 6	UL94 V-2	dark grey
OR-DLA-PG11L-2-DGR	2	PG11	29	11	22	5 - 10	PA 6	UL94 V-2	dark grey
OR-DLA-PG11L-DGR	2	PG11	29	15	22	5 - 10	PA 6	UL94 V-2	dark grey
OR-DLA-PG13.5L-2-DGR	2	PG13.5	29	15	24	4 - 10	PA 6	UL94 V-2	dark grey
OR-DLA-PG13.5L-DGR	2	PG13.5	29	15	24	6 - 12	PA 6	UL94 V-2	dark grey
OR-DLA-PG16L-DGR	2	PG16	33	15	27	10 - 14	PA 6	UL94 V-2	dark grey
OR-DLA-PG21L-DGR	2	PG21	38	15	33	13 - 18	PA 6	UL94 V-2	dark grey
OR-DLA-PG7L-GR	2	PG7	24	15	15	3 - 6.5	PA 6	UL94 V-2	light grey
OR-DLA-PG9L-GR	2	PG9	28	15	19	4 - 8	PA 6	UL94 V-2	light grey
OR-DLA-PG11L-2-GR	2	PG11	29	11	22	5 - 10	PA 6	UL94 V-2	light grey
OR-DLA-PG11L-GR	2	PG11	29	15	22	5 - 10	PA 6	UL94 V-2	light grey
OR-DLA-PG13.5L-2-GR	2	PG13.5	29	15	24	4 - 10	PA 6	UL94 V-2	light grey
OR-DLA-PG13.5L-GR	2	PG13.5	29	15	24	6 - 12	PA 6	UL94 V-2	light grey
OR-DLA-PG16L-GR	2	PG16	33	15	27	10 - 14	PA 6	UL94 V-2	light grey
OR-DLA-PG21L-GR	2	PG21	38	15	33	13 - 18	PA 6	UL94 V-2	light grey
OR-DLA-PG7L-BLK	2	PG7	24	15	15	3 - 6.5	PA 6	UL94 V-2	black
OR-DLA-PG9L-BLK	2	PG9	28	15	19	4 - 8	PA 6	UL94 V-2	black
OR-DLA-PG11L-2-BLK	2	PG11	29	11	22	5 - 10	PA 6	UL94 V-2	black
OR-DLA-PG11L-BLK	2	PG11	29	15	22	5 - 10	PA 6	UL94 V-2	black

Symbol	Type	PG thread AG	H	Thread length GL	Wrench size	Cable diameter range	Material	Flammability	Color
			[mm]	[mm]	[mm]	[mm]			
OR-DLA-PG13.5L-2-BLK	2	PG13.5	29	15	24	4 - 10	PA 6	UL94 V-2	black
OR-DLA-PG13.5L-BLK	2	PG13.5	29	15	24	6 - 12	PA 6	UL94 V-2	black
OR-DLA-PG16L-BLK	2	PG16	33	15	27	10 - 14	PA 6	UL94 V-2	black
OR-DLA-PG21L-BLK	2	PG21	38	15	33	13 - 18	PA 6	UL94 V-2	black