


**OR-MDLA-M - Brass cable gland with metric thread, nickel plated**

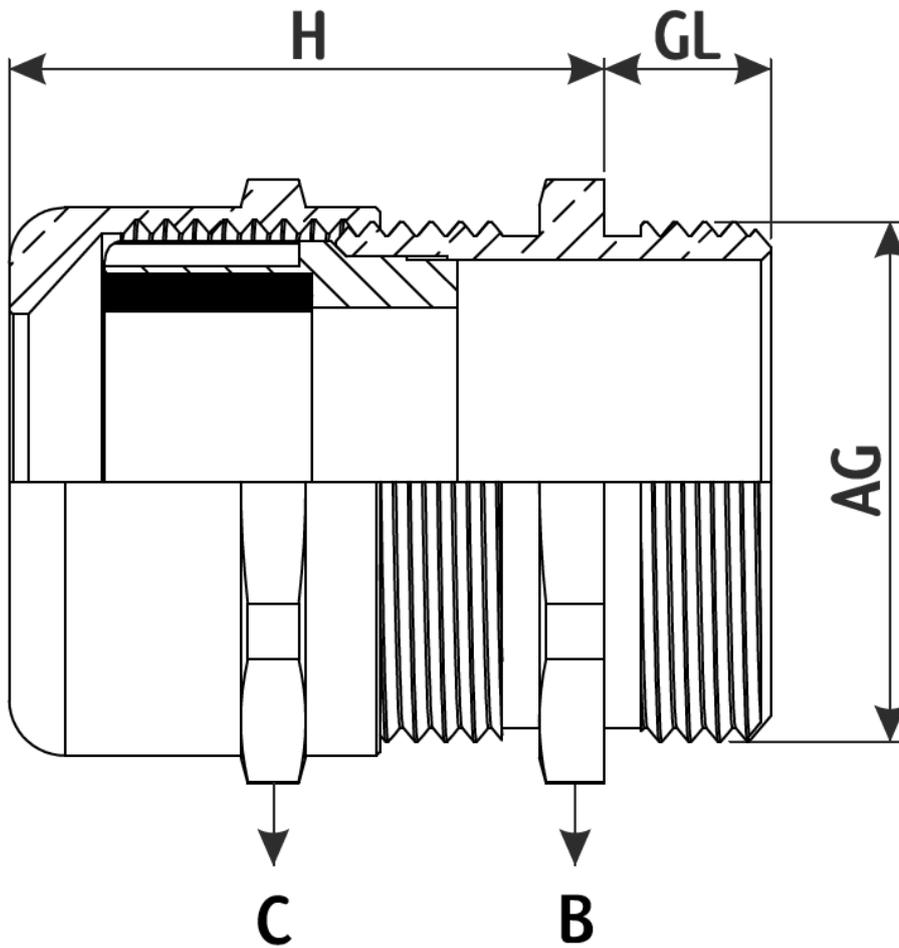

**Details:**

- **Material:**
  - Body: brass, nickel plated
  - Clamping insert: PA6 UL94 V2
  - Sealing ring: TPV
  - O-Ring: NBR
- Thread: metric (EN 60423)
- Protection class: IP68 (5 bar)
- Temperature range: -40°C to +100°C
- Easy to assemble
- Halogen free

Symbol	Metric thread AG	H	Thread length GL	B	C	Cable diameter range [mm]	Material
		[mm]	[mm]	[mm]	[mm]		
OR-MDLA-M12	M12×1.5	22	6	14	14	3 - 6.5	brass, nickel plated
OR-MDLA-M16	M16×1.5	23	7	18	17	4 - 8	brass, nickel plated

Symbol	Metric thread AG	H	Thread length GL	B	C	Cable diameter range	Material
		[mm]	[mm]	[mm]	[mm]	[mm]	
OR-MDLA-M20B	M20×1.5	26.5	8	22	22	4 - 10	brass, nickel plated
OR-MDLA-M20	M20×1.5	26.5	8	22	22	6 - 12	brass, nickel plated
OR-MDLA-M25	M25×1.5	28	8	27	24	10 - 14	brass, nickel plated
OR-MDLA-M32	M32×1.5	31.5	9	34	30	13 - 18	brass, nickel plated
OR-MDLA-M40	M40×1.5	38	9	43	40	18 - 25	brass, nickel plated
OR-MDLA-M50	M50×1.5	43	9	55	50	22 - 32	brass, nickel plated
OR-MDLA-M63	M63×1.5	48	14	68	64	33 - 44	brass, nickel plated
OR-MDLA-L-M12	M12×1.5	22	12	14	14	3 - 6.5	brass, nickel plated
OR-MDLA-L-M16	M16×1.5	23	12	18	17	4 - 8	brass, nickel plated
OR-MDLA-L-M20B	M20×1.5	26.5	12	22	22	4 - 10	brass, nickel plated
OR-MDLA-L-M20	M20×1.5	26.5	12	22	22	6 - 12	brass, nickel plated
OR-MDLA-L-M25	M25×1.5	28	12	27	24	10 - 14	brass, nickel plated
OR-MDLA-L-M32	M32×1.5	31.5	14	34	30	13 - 18	brass, nickel plated
OR-MDLA-L-M40	M40×1.5	38	14	43	40	18 - 25	brass, nickel plated
OR-MDLA-L-M50	M50×1.5	43	14	55	50	22 - 32	brass, nickel plated
OR-MDLA-L-M63	M63×1.5	48	18	70	64	33 - 4	brass, nickel plated