


OR-NDLA-M - Cable Gland Nuts with metric thread

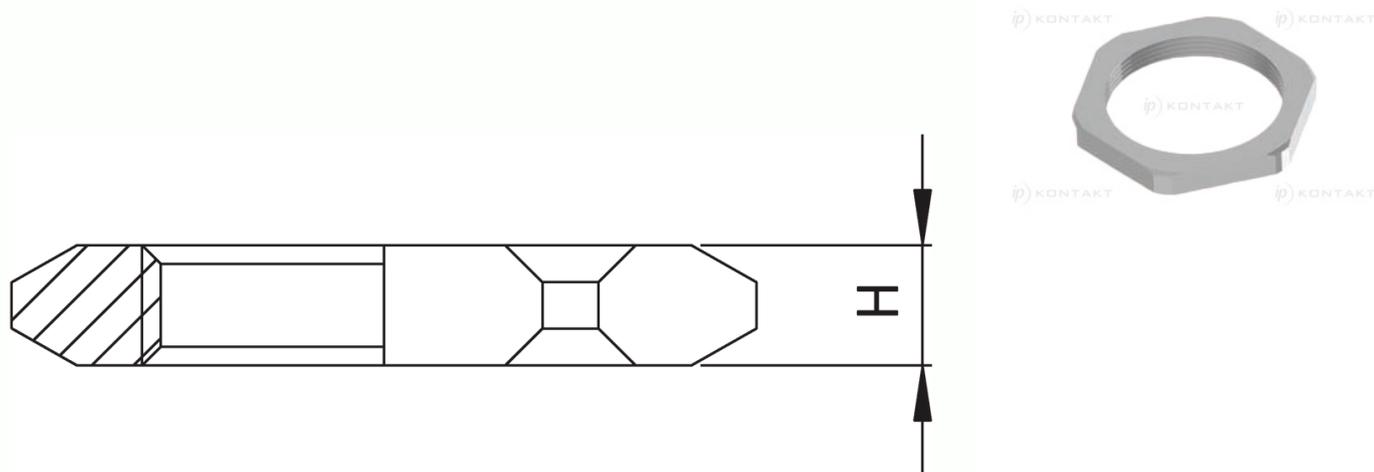

Details:

- **Material: PA 66 V2**
- Colour: grey (RAL 7001), Light grey (RAL 7035), black (RAL 9005)
- Thread: metric (EN 60423)
- Working temperature: -30°C to +80°C (150°C short-term)
- UV resistance
- Halogen free

| Symbol | Metric thread | H | Wrench size | Material | Flammability | Color |
|-----------------|---------------|------|-------------|----------|--------------|------------|
| | | [mm] | [mm] | | | |
| OR-NDLA-M12-BLK | M12×1.5 | 5 | 18 | PA 66 | UL94 V-2 | black |
| OR-NDLA-M12-DGR | M12×1.5 | 5 | 18 | PA 66 | UL94 V-2 | dark grey |
| OR-NDLA-M12-GR | M12×1.5 | 5 | 18 | PA 66 | UL94 V-2 | light grey |
| OR-NDLA-M16-BLK | M16×1.5 | 5 | 22 | PA 66 | UL94 V-2 | black |
| OR-NDLA-M16-DGR | M16×1.5 | 5 | 22 | PA 66 | UL94 V-2 | dark grey |
| OR-NDLA-M16-GR | M16×1.5 | 5 | 22 | PA 66 | UL94 V-2 | light grey |
| OR-NDLA-M20-BLK | M20×1.5 | 6 | 26 | PA 66 | UL94 V-2 | black |
| OR-NDLA-M20-DGR | M20×1.5 | 6 | 26 | PA 66 | UL94 V-2 | dark grey |
| OR-NDLA-M20-GR | M20×1.5 | 6 | 26 | PA 66 | UL94 V-2 | light grey |
| OR-NDLA-M25-BLK | M25×1.5 | 6 | 32 | PA 66 | UL94 V-2 | black |
| OR-NDLA-M25-DGR | M25×1.5 | 6 | 32 | PA 66 | UL94 V-2 | dark grey |
| OR-NDLA-M25-GR | M25×1.5 | 6 | 32 | PA 66 | UL94 V-2 | light grey |
| OR-NDLA-M32-BLK | M32×1.5 | 7 | 41 | PA 66 | UL94 V-2 | black |
| OR-NDLA-M32-DGR | M32×1.5 | 7 | 41 | PA 66 | UL94 V-2 | dark grey |
| OR-NDLA-M32-GR | M32×1.5 | 7 | 41 | PA 66 | UL94 V-2 | light grey |
| OR-NDLA-M40-BLK | M40×1.5 | 7 | 50 | PA 66 | UL94 V-2 | black |
| OR-NDLA-M40-DGR | M40×1.5 | 7 | 50 | PA 66 | UL94 V-2 | dark grey |
| OR-NDLA-M40-GR | M40×1.5 | 7 | 50 | PA 66 | UL94 V-2 | light grey |
| OR-NDLA-M50-BLK | M50×1.5 | 8 | 60 | PA 66 | UL94 V-2 | black |
| OR-NDLA-M50-DGR | M50×1.5 | 8 | 60 | PA 66 | UL94 V-2 | dark grey |
| OR-NDLA-M50-GR | M50×1.5 | 8 | 60 | PA 66 | UL94 V-2 | light grey |
| OR-NDLA-M63-BLK | M63×1.5 | 8 | 75 | PA 66 | UL94 V-2 | black |

| Symbol | Metric thread | H | Wrench size | Material | Flammability | Color |
|-----------------|---------------|------|-------------|----------|--------------|------------|
| | | [mm] | [mm] | | | |
| OR-NDLA-M63-DGR | M63×1.5 | 8 | 75 | PA 66 | UL94 V-2 | dark grey |
| OR-NDLA-M63-GR | M63×1.5 | 8 | 75 | PA 66 | UL94 V-2 | light grey |