


OR-NDLA-PG - Cable Gland Nuts with PG thread

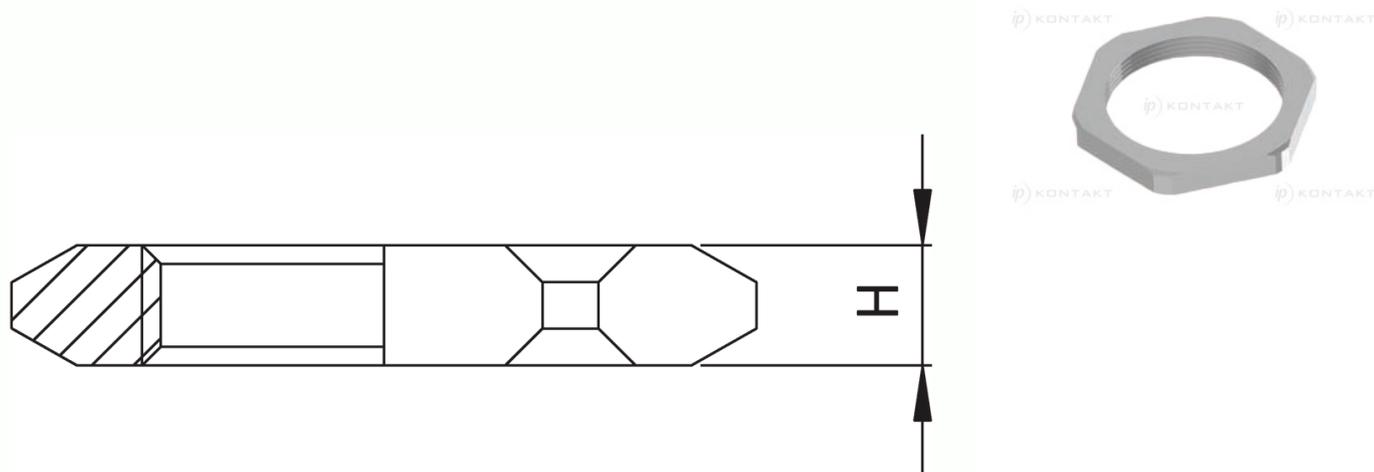

Details:

- **Material: PA 66 V2**
- Colour: grey (RAL 7001), Light grey (RAL 7035), black (RAL 9005)
- Thread: PG (DIN 40430)
- Working temperature: -30°C to +80°C (150°C short-term)
- UV resistance
- Halogen free

Symbol	PG thread	H	Wrench size	Material	Flammability	Color
		[mm]	[mm]			
OR-NDLA-PG7-DGR		5	19	PA 66	UL94 V-2	dark grey
OR-NDLA-PG7-GR		5	19	PA 66	UL94 V-2	light grey
OR-NDLA-PG7-BLK		5	19	PA 66	UL94 V-2	black
OR-NDLA-PG9A-DGR		5	19	PA 66	UL94 V-2	dark grey
OR-NDLA-PG9A-GR		5	19	PA 66	UL94 V-2	light grey
OR-NDLA-PG9A-BLK		5	19	PA 66	UL94 V-2	black
OR-NDLA-PG9-DGR		5	22	PA 66	UL94 V-2	dark grey
OR-NDLA-PG9-GR		5	22	PA 66	UL94 V-2	light grey
OR-NDLA-PG9-BLK		5	22	PA 66	UL94 V-2	black
OR-NDLA-PG11-DGR		5	24	PA 66	UL94 V-2	dark grey
OR-NDLA-PG11-GR		5	24	PA 66	UL94 V-2	light grey
OR-NDLA-PG11-BLK		5	24	PA 66	UL94 V-2	black
OR-NDLA-PG13.5-DGR		6	27	PA 66	UL94 V-2	dark grey
OR-NDLA-PG13.5-GR		6	27	PA 66	UL94 V-2	light grey
OR-NDLA-PG13.5-BLK		6	27	PA 66	UL94 V-2	black
OR-NDLA-PG16-DGR		6	30	PA 66	UL94 V-2	dark grey
OR-NDLA-PG16-GR		6	30	PA 66	UL94 V-2	light grey
OR-NDLA-PG16-BLK		6	30	PA 66	UL94 V-2	black
OR-NDLA-PG21-DGR		7	36	PA 66	UL94 V-2	dark grey
OR-NDLA-PG21-GR		7	36	PA 66	UL94 V-2	light grey
OR-NDLA-PG21-BLK		7	36	PA 66	UL94 V-2	black
OR-NDLA-PG29-DGR		7	46	PA 66	UL94 V-2	dark grey

Symbol	PG thread	H	Wrench size	Material	Flammability	Color
		[mm]	[mm]			
OR-NDLA-PG29-GR		7	46	PA 66	UL94 V-2	light grey
OR-NDLA-PG29-BLK		7	46	PA 66	UL94 V-2	black
OR-NDLA-PG36-DGR		8	60	PA 66	UL94 V-2	dark grey
OR-NDLA-PG36-GR		8	60	PA 66	UL94 V-2	light grey
OR-NDLA-PG36-BLK		8	60	PA 66	UL94 V-2	black
OR-NDLA-PG42-DGR		8	65	PA 66	UL94 V-2	dark grey
OR-NDLA-PG42-GR		8	65	PA 66	UL94 V-2	light grey
OR-NDLA-PG42-BLK		8	65	PA 66	UL94 V-2	black
OR-NDLA-PG48-DGR		8	70	PA 66	UL94 V-2	dark grey
OR-NDLA-PG48-GR		8	70	PA 66	UL94 V-2	light grey
OR-NDLA-PG48-BLK		8	70	PA 66	UL94 V-2	black