


OR-ZOD - Blind stops

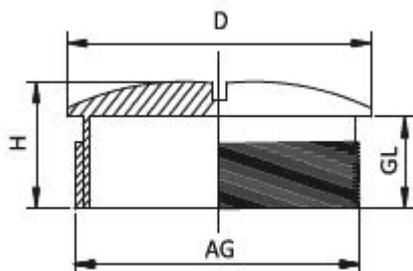

Details:

- **Screw plug material: Polyamide PA6 UL94 V-2**
- **Sealing ring: NBR (on special order)**
- **Colour:**
 - **Grey: RAL 7001**
 - **Light grey: RAL 7035**
 - **Czarny: RAL 9005**
- Connection thread: Metric (EN 60423)/PG (DIN 40430)
- Certificates: ROHS,CE,PT,TUV
- Protection class: IP54 / IP68 (with o-ring)
- Temperature range: -20°C to +100°C. Short term: -30°C to +150°C
- For unused threaded holes
- UV resistance
- Halogen free

Symbol	Metric thread	PG thread	H	Thread length GL	D	Material	Flammability	Color
			[mm]	[mm]	[mm]			
OR-ZOD-M12x1.5-GR	M12x1.5	-	8.5	6	15	PA 6	UL94 V-2	grey
OR-ZOD-M12x1.5-LGR	M12x1.5	-	8.5	6	15	PA 6	UL94 V-2	light grey
OR-ZOD-M12x1.5-BLK	M12x1.5	-	8.5	6	15	PA 6	UL94 V-2	black
OR-ZOD-M16x1.5-GR	M16x1.5	-	10	7	20	PA 6	UL94 V-2	grey
OR-ZOD-M16x1.5-LGR	M16x1.5	-	10	7	20	PA 6	UL94 V-2	light grey
OR-ZOD-M16x1.5-BLK	M16x1.5	-	10	7	20	PA 6	UL94 V-2	black
OR-ZOD-M20x1.5-GR	M20x1.5	-	10	7	24	PA 6	UL94 V-2	grey
OR-ZOD-M20x1.5-LGR	M20x1.5	-	10	7	24	PA 6	UL94 V-2	light grey
OR-ZOD-M20x1.5-BLK	M20x1.5	-	10	7	24	PA 6	UL94 V-2	black
OR-ZOD-M25x1.5-GR	M25x1.5	-	14	10	30	PA 6	UL94 V-2	grey
OR-ZOD-M25x1.5-LGR	M25x1.5	-	14	10	30	PA 6	UL94 V-2	light grey
OR-ZOD-M25x1.5-BLK	M25x1.5	-	14	10	30	PA 6	UL94 V-2	black
OR-ZOD-M32x1.5-GR	M32x1.5	-	14	10	37	PA 6	UL94 V-2	grey
OR-ZOD-M32x1.5-LGR	M32x1.5	-	14	10	37	PA 6	UL94 V-2	light grey
OR-ZOD-M32x1.5-BLK	M32x1.5	-	14	10	37	PA 6	UL94 V-2	black
OR-ZOD-M40x1.5-GR	M40x1.5	-	15	10	48	PA 6	UL94 V-2	grey
OR-ZOD-M40x1.5-LGR	M40x1.5	-	15	10	48	PA 6	UL94 V-2	light grey
OR-ZOD-M40x1.5-BLK	M40x1.5	-	15	10	48	PA 6	UL94 V-2	black
OR-ZOD-PG7-GR	-	PG7	8	6	15	PA 6	UL94 V-2	grey
OR-ZOD-PG7-LGR	-	PG7	8	6	15	PA 6	UL94 V-2	light grey
OR-ZOD-PG7-BLK	-	PG7	8	6	15	PA 6	UL94 V-2	black
OR-ZOD-PG9-GR	-	PG9	8.2	6	19	PA 6	UL94 V-2	grey

Symbol	Metric thread	PG thread	H	Thread length GL	D	Material	Flammability	Color
			[mm]	[mm]	[mm]			
OR-ZOD-PG9-LGR	-	PG9	8.2	6	19	PA 6	UL94 V-2	light grey
OR-ZOD-PG9-BLK	-	PG9	8.2	6	19	PA 6	UL94 V-2	black
OR-ZOD-PG11-GR	-	PG11	8.5	6	22	PA 6	UL94 V-2	grey
OR-ZOD-PG11-LGR	-	PG11	8.5	6	22	PA 6	UL94 V-2	light grey
OR-ZOD-PG11-BLK	-	PG11	8.5	6	22	PA 6	UL94 V-2	black
OR-ZOD-PG13.5-GR	-	PG13.5	8.5	6	25	PA 6	UL94 V-2	grey
OR-ZOD-PG13.5-LGR	-	PG13.5	8.5	6	25	PA 6	UL94 V-2	light grey
OR-ZOD-PG13.5-BLK	-	PG13.5	8.5	6	25	PA 6	UL94 V-2	black
OR-ZOD-PG16-GR	-	PG16	8.5	6	27	PA 6	UL94 V-2	grey
OR-ZOD-PG16-LGR	-	PG16	8.5	6	27	PA 6	UL94 V-2	light grey
OR-ZOD-PG16-BLK	-	PG16	8.5	6	27	PA 6	UL94 V-2	black
OR-ZOD-PG21-GR	-	PG21	12	8	33	PA 6	UL94 V-2	grey
OR-ZOD-PG21-LGR	-	PG21	12	8	33	PA 6	UL94 V-2	light grey
OR-ZOD-PG21-BLK	-	PG21	12	8	33	PA 6	UL94 V-2	black
OR-ZOD-PG29-GR	-	PG29	11.3	8	44	PA 6	UL94 V-2	grey
OR-ZOD-PG29-LGR	-	PG29	11.3	8	44	PA 6	UL94 V-2	light grey
OR-ZOD-PG29-BLK	-	PG29	11.3	8	44	PA 6	UL94 V-2	black
OR-ZOD-PG36-GR	-	PG36	14.3	10	55	PA 6	UL94 V-2	grey
OR-ZOD-PG36-LGR	-	PG36	14.3	10	55	PA 6	UL94 V-2	light grey
OR-ZOD-PG36-BLK	-	PG36	14.3	10	55	PA 6	UL94 V-2	black