


## PGM - Push Grommet Hole Plug M Series

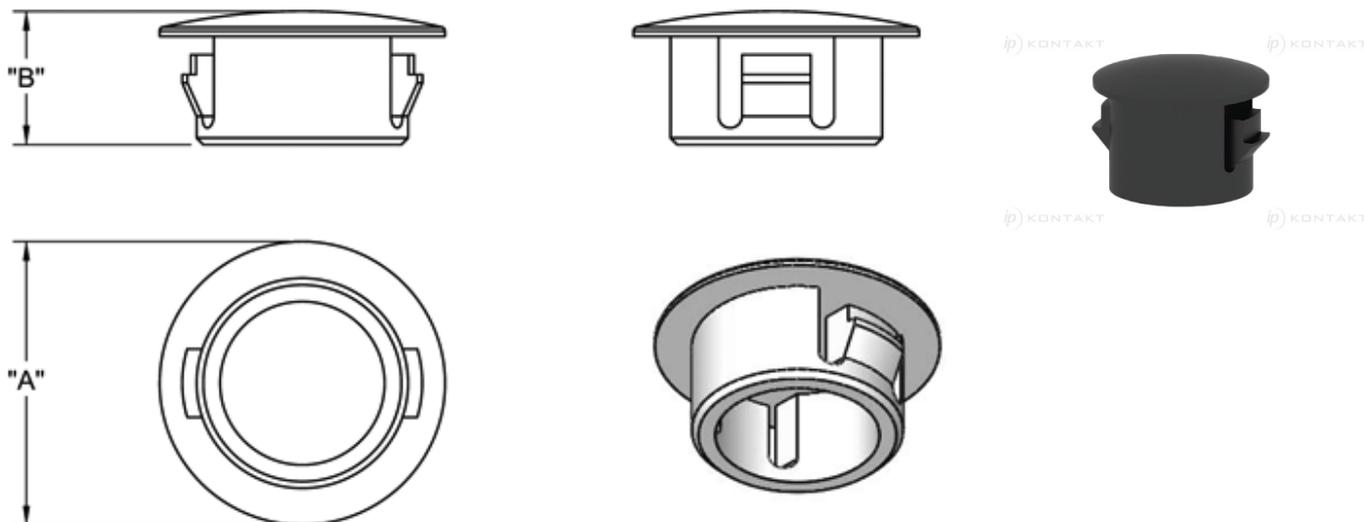

### Details:

- **Material:** UL94 V2 Nylon 6/6, RMS-01\*
- **Color:** black or white
- **Standard Pack:** see table

Symbol	Mounting hole diameter range	Panel thickness range	Ext. diameter A	Height B	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]				
O-PGM-064-059-016-BLK	4.8	1.6 max.	6.4	5.9	1000	PA 66	UL94 V-2	black
O-PGM-064-059-016-WH	4.8	1.6 max.	6.4	5.9	1000	PA 66	UL94 V-2	white
PGM-4	4.8	1.7 max.	6	5.2	1000	PA 66	UL94 V-2	black
O-PGM-080-080-016-BLK	6.4	1.6 max.	8	8	1000	PA 66	UL94 V-2	black
O-PGM-080-080-016-WH	6.4	1.6 max.	8	8	1000	PA 66	UL94 V-2	white
PGM-6	6.4	1.7 max.	7.6	5.6	1000	PA 66	UL94 V-2	black
PGM-7	7.1	1.6 max.	11	7	1000	PA 66	UL94 V-2	black
PGM-8	7.8	1.6 max.	9.5	6	1000	PA 66	UL94 V-2	black
O-PGM-095-080-016-BLK	8	1.6 max.	9.5	8	1000	PA 66	UL94 V-2	black
O-PGM-095-080-016-WH	8	1.6 max.	9.5	8	1000	PA 66	UL94 V-2	white
O-PGM-120-100-032-BLK	9.5	3.2 max.	12	10	1000	PA 66	UL94 V-2	black
O-PGM-120-100-032-WH	9.5	3.2 max.	12	10	1000	PA 66	UL94 V-2	white
PGM-9	9.6	1.2 max.	13	6.5	1000	PA 66	UL94 V-2	black
PGM-10	9.8	1.4 max.	13	6	1000	PA 66	UL94 V-2	black
O-PGM-135-103-032-BLK	11.1	3.2 max.	13.5	10.3	1000	PA 66	UL94 V-2	black
O-PGM-135-103-032-WH	11.1	3.2 max.	13.5	10.3	1000	PA 66	UL94 V-2	white
PGM-3	11.9	1.6 max.	13.5	6.4	1000	PA 66	UL94 V-2	black
PGM-5	12.7	1.6 max.	14.3	6.4	1000	PA 66	UL94 V-2	black
O-PGM-146-103-032-BLK	12.7	3.2 max.	14.6	10.3	1000	PA 66	UL94 V-2	black
O-PGM-146-103-032-WH	12.7	3.2 max.	14.6	10.3	1000	PA 66	UL94 V-2	white
O-PGM-147-143-064-BLK	12.7	6.4 max.	14.7	14.3	1000	PA 66	UL94 V-2	black
O-PGM-147-143-064-WH	12.7	6.4 max.	14.7	14.3	1000	PA 66	UL94 V-2	white
PGM-13	12.9	2.1 max.	17	8	1000	PA 66	UL94 V-2	black
PGM-11	13.5	1.6 max.	15.1	6.4	500	PA 66	UL94 V-2	black
O-PGM-167-103-032-BLK	14.3	3.2 max.	16.7	10.3	1000	PA 66	UL94 V-2	black
O-PGM-167-103-032-WH	14.3	3.2 max.	16.7	10.3	1000	PA 66	UL94 V-2	white
PGM-12	15.9	1.6 max.	18.2	6.4	500	PA 66	UL94 V-2	black

Symbol	Mounting hole diameter range	Panel thickness range	Ext. diameter A	Height B	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
O-PGM-182-103-032-BLK	15.9	3.2 max.	18.2	10.3	1000	PA 66	UL94 V-2	black
O-PGM-182-103-032-WH	15.9	3.2 max.	18.2	10.3	1000	PA 66	UL94 V-2	white
O-PGM-182-143-064-BLK	15.9	6.4 max.	18.2	14.3	1000	PA 66	UL94 V-2	black
PGM-16	16	2.0 max.	20	8	500	PA 66	UL94 V-2	black
O-PGM-185-103-025-BLK	16	2.5 max.	18.5	10.3	1000	PA 66	UL94 V-2	black
PGM-28	17.5	3.2 max.	20	10.3	1000	PA 66	UL94 V-2	black
O-PGM-200-103-032-WH	17.5	3.2 max.	20	10.3	1000	PA 66	UL94 V-2	white
PGM-19	19	3.2 max.	23.5	10.5	500	PA 66	UL94 V-2	black
O-PGM-232-103-032-BLK	19	3.2 max.	23.2	10.3	1000	PA 66	UL94 V-2	black
O-PGM-232-103-032-WH	19	3.2 max.	23.2	10.3	1000	PA 66	UL94 V-2	white
PGM-14	19.1	1.6 max.	21.4	6.4	500	PA 66	UL94 V-2	black
O-PGM-234-143-064-BLK	19.1	6.4 max.	23.4	14.3	1000	PA 66	UL94 V-2	black
O-PGM-234-143-064-WH	19.1	6.4 max.	23.4	14.3	1000	PA 66	UL94 V-2	white
PGM-15	19.8	1.6 max.	22.6	6.4	500	PA 66	UL94 V-2	black
O-PGM-226-103-025-BLK	20	2.5 max.	22.6	10.3	1000	PA 66	UL94 V-2	black
O-PGM-226-103-025-WH	20	2.5 max.	22.6	10.3	1000	PA 66	UL94 V-2	white
O-PGM-226-103-032-BLK	20.6	3.2 max.	22.6	10.3	1000	PA 66	UL94 V-2	black
O-PGM-226-103-032-WH	20.6	3.2 max.	22.6	10.3	1000	PA 66	UL94 V-2	white
PGM-22	22	3.0 max.	26	9.6	500	PA 66	UL94 V-2	black
PGM-17	22.2	1.6 max.	24.6	6.4	500	PA 66	UL94 V-2	black
O-PGM-258-115-032-WH	22.2	3.2 max.	25.8	11.5	1000	PA 66	UL94 V-2	white
PGM-29	22.2	3.2 max.	28.6	11.5	200	PA 66	UL94 V-2	black
O-PGM-258-143-064-BLK	22.2	6.4 max.	25.8	14.3	1000	PA 66	UL94 V-2	black
O-PGM-258-143-064-WH	22.2	6.4 max.	25.8	14.3	1000	PA 66	UL94 V-2	white
O-PGM-298-115-025-BLK	25	2.5 max.	29.8	11.5	1000	PA 66	UL94 V-2	black
O-PGM-298-115-025-WH	25	2.5 max.	29.8	11.5	1000	PA 66	UL94 V-2	white
O-PGM-305-115-032-BLK	25.4	3.2 max.	30.5	11.5	1000	PA 66	UL94 V-2	black
O-PGM-305-115-032-WH	25.4	3.2 max.	30.5	11.5	1000	PA 66	UL94 V-2	white
PGM-25	25.5	3.2 max.	28	12.7	200	PA 66	UL94 V-2	black
PGM-32	27.8	3.2 max.	31	11.5	1000	PA 66	UL94 V-2	black
O-PGM-310-115-032-WH	27.8	3.2 max.	31	11.5	1000	PA 66	UL94 V-2	white
O-PGM-309-143-064-BLK	27.8 - 28.6	6.4 max.	30.9	14.3	1000	PA 66	UL94 V-2	black
O-PGM-333-115-032-BLK	30	3.2 max.	33.3	11.5	1000	PA 66	UL94 V-2	black
O-PGM-333-115-032-WH	30	3.2 max.	33.3	11.5	1000	PA 66	UL94 V-2	white
O-PGM-333-143-064-BLK	30.1	6.4 max.	33.3	14.3	600	PA 66	UL94 V-2	black
O-PGM-333-143-064-WH	30.1	6.4 max.	33.3	14.3	600	PA 66	UL94 V-2	white
PGM-30	30.6	3.2 max.	34	13	200	PA 66	UL94 V-2	black
O-PGM-349-143-064-BLK	31.7	6.4 max.	34.9	14.3	1000	PA 66	UL94 V-2	black
O-PGM-353-115-025-BLK	32	2.5 max.	35.3	11.5	1000	PA 66	UL94 V-2	black
PGM-18	32	3.2 max.	34.9	11.5	1000	PA 66	UL94 V-2	black
O-PGM-349-115-032-WH	32	3.2 max.	34.9	11.5	1000	PA 66	UL94 V-2	white
O-PGM-381-143-064-BLK	34.9	6.4 max.	38.1	14.3	1000	PA 66	UL94 V-2	black
O-PGM-381-143-064-WH	34.9	6.4 max.	38.1	14.3	1000	PA 66	UL94 V-2	white
PGM-20	35	3.2 max.	38	11.5	1000	PA 66	UL94 V-2	black
O-PGM-380-115-032-WH	35	3.2 max.	38	11.5	1000	PA 66	UL94 V-2	white
PGM-31	38	3.2 max.	42.7	11.5	1000	PA 66	UL94 V-2	black
O-PGM-427-115-032-WH	38	3.2 max.	42.7	11.5	1000	PA 66	UL94 V-2	white
O-PGM-424-143-064-BLK	38.1	6.4 max.	42.4	14.3	1000	PA 66	UL94 V-2	black
O-PGM-424-143-064-WH	38.1	6.4 max.	42.4	14.3	1000	PA 66	UL94 V-2	white
O-PGM-484-143-064-BLK	44.5	6.4 max.	48.4	14.3	1000	PA 66	UL94 V-2	black
O-PGM-484-143-064-WH	44.5	6.4 max.	48.4	14.3	1000	PA 66	UL94 V-2	white
PGM-21	45	3.2 max.	48.4	11.5	500	PA 66	UL94 V-2	black
O-PGM-484-115-032-WH	45	3.2 max.	48.4	11.5	500	PA 66	UL94 V-2	white
PGM-23	50.8	3.2 max.	55.1	11.9	100	PA 66	UL94 V-2	black

Symbol	Mounting hole diameter range	Panel thickness range	Ext. diameter A	Height B	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
O-PGM-551-143-064-BLK	50.8	6.4 max.	55.1	14.3	1000	PA 66	UL94 V-2	black
O-PGM-551-143-064-WH	50.8	6.4 max.	55.1	14.3	1000	PA 66	UL94 V-2	white
O-PGM-550-115-032-BLK	51	3.2 max.	55	11.5	500	PA 66	UL94 V-2	black
O-PGM-550-115-032-WH	51	3.2 max.	55	11.5	500	PA 66	UL94 V-2	white