


## PGSB-A - Open Bushing A Series

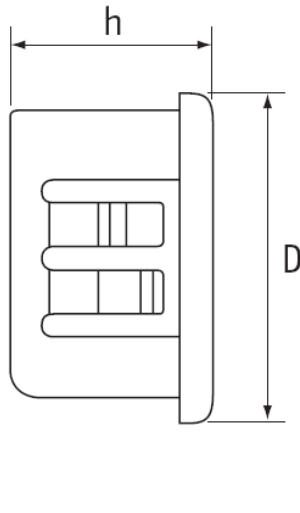

### Details:

- **Material: UL94 V2 Nylon 6/6, RMS-01\***
- **Material: Nylon 6/6, UL 94 V-0, RMS-19\* - on special order only, please add "-V0" to part no.**
- **Color: black; white on special order only**
- **Standard pack: see table**

Symbol	Mounting hole diameter	Panel thickness range	D	d <sub>1</sub>	h	Standard pack	Notes	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]				
PGSB-0609A	9.5	1.7 max.	11.4	6.6	6.5	1000	UL #E320906	PA 66	UL94 V-2	black
PGSB-1A	9.5	3.2 max.	10.7	6.7	9.9	1000	UL #E320906	PA 66	UL94 V-2	black
PGSB-2A	11.1	3.2 max.	12.7	7.9	10.3	1000	UL #E320906	PA 66	UL94 V-2	black
PGSB-1013A	13	3.5 max.	14.9	9	10.5	500	UL #E320906	PA 66	UL94 V-2	black
PGSB-3A	14.3	3.2 max.	16.3	9.9	10.3	500	UL #E320906	PA 66	UL94 V-2	black
PGSB-900A	15.9	3.2 max.	17.5	11.5	10.3	500	-	PA 66	UL94 V-2	black
PGSB-1316A	16	3.5 max.	18	10.5	10.5	500	UL #E320906	PA 66	UL94 V-2	black
PGSB-1216A	16.5	3.3 max.	18.6	12.3	10	500	UL #E320906	PA 66	UL94 V-2	black
PGSB-901A	19	3.2 max.	20.2	13.9	10.3	500	-	PA 66	UL94 V-2	black
PGSB-1519A	19	3.3 max.	20.6	14.5	11	500	UL #E320906	PA 66	UL94 V-2	black
PGSB-1822A	22	3.5 max.	24.8	17.3	11.5	200	UL #E320906	PA 66	UL94 V-2	black
PGSB-902A	22.2	3.2 max.	23.4	17.7	10.3	500	-	PA 66	UL94 V-2	black
PGSB-9A	25	3.0 max.	26.4	20.4	10.3	200	UL #E320906	PA 66	UL94 V-2	black
PGSB-4A	25.4	3.2 max.	26.6	20.6	10.3	200	UL #E320906	PA 66	UL94 V-2	black
PGSB-5A	27.8	3.2 max.	29.4	22.2	10.3	200	UL #E320906	PA 66	UL94 V-2	black
PGSB-6A	31.8	3.2 max.	34.1	26.6	10.3	200	UL #E320906	PA 66	UL94 V-2	black
PGSB-7A	34.9	3.2 max.	37.3	29.7	10.3	200	UL #E320906	PA 66	UL94 V-2	black
PGSB-8A	38.1	3.2 max.	40.1	31.7	10.7	200	UL #E320906	PA 66	UL94 V-2	black