


PGSD - Snap Bushing

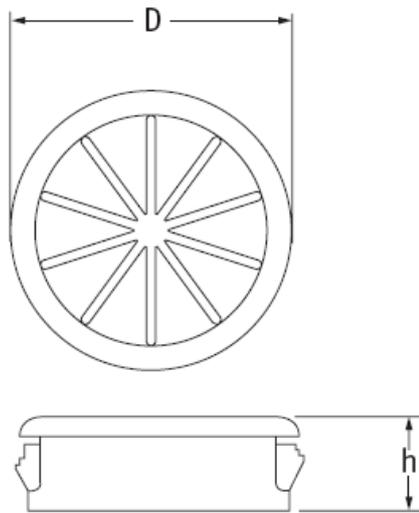

Details:

- **Material: UL94 V2 Nylon 6/6, RMS-01***
- **Material: Nylon 6/6, UL 94 V-0, RMS-19* - on special order only, please add "-V0" to part no.**
- **Color: black; white on special order only**
- **Standard pack: see table**

Symbol	Mounting hole diameter	Panel thickness range	Max. cable bundle diameter	Ext. diameter D	Height h	Material	Flammability	Color	Notes	Standard pack
	[mm]	[mm]	[mm]	[mm]	[mm]					[szt./pcs]
PGSD-1	12.7	1.6 max.	15.2	7.9	6.4	PA 66	UL94 V-2	black	UL #E320906	500
PGSD-5	12.7	3.2 max.	15.2	7.9	9.8	PA 66	UL94 V-2	black	UL #E320906	500
PGSD-O-847	12.7	6.4 max.	7.6	15.2	13.8	PA 66	UL94 V-2	black	-	1000
PGSD-2	15.9	1.6 max.	18.5	11.1	6.4	PA 66	UL94 V-2	black	UL #E320906	500
PGSD-6	15.9	3.2 max.	18.5	11.1	10.3	PA 66	UL94 V-2	black	UL #E320906	500
PGSD-O-848	15.9	6.4 max.	11.1	18.3	14	PA 66	UL94 V-2	black	-	1000
PGSD-O-849	19	6.4 max.	12.7	21.4	14	PA 66	UL94 V-2	black	-	1000
PGSD-3	19.1	1.6 max.	21.4	12.7	6.4	PA 66	UL94 V-2	black	UL #E320906	200
PGSD-7	19.1	3.2 max.	21.4	12.7	9.9	PA 66	UL94 V-2	black	UL #E320906	200
PGSD-O-536	20.6	3.2 max.	12.7	22.6	9.9	PA 66	UL94 V-2	black	-	1000
PGSD-4	22.2	1.6 max.	23.8	14.2	6.4	PA 66	UL94 V-2	black	UL #E320906	200
PGSD-8	22.2	3.2 max.	23.8	14.2	11.5	PA 66	UL94 V-2	black	UL #E320906	200
PGSD-O-850	22.2	6.4 max.	14.3	23.8	14	PA 66	UL94 V-2	black	-	1000
PGSD-9	25.4	3.2 max.	27	19.1	11.5	PA 66	UL94 V-2	black	UL #E320906	200
PGSD-O-539	27.8	3.2 max.	20.6	29.3	11.5	PA 66	UL94 V-2	black	-	1000
PGSD-O-852	27.8	6.4 max.	20.6	29.4	14	PA 66	UL94 V-2	black	-	1000
PGSD-10	34.9	3.2 max.	37.8	25.4	11.5	PA 66	UL94 V-2	black	UL #E320906	100
PGSD-O-853	34.9	6.4 max.	25.4	37.8	14.3	PA 66	UL94 V-2	black	-	500
PGSD-11	38.1	3.2 max.	40.9	27	11.4	PA 66	UL94 V-2	black	UL #E320906	100
PGSD-O-854	38.1	6.4 max.	26.9	40.9	14.3	PA 66	UL94 V-2	black	-	500