




PPR/PPR-T - Push Rivet/Push Rivet Tool

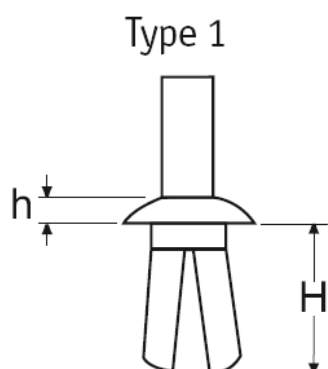

Details:

- **Material:** UL94 V2 Nylon 6/6, RMS-01*
- **Color:** Natural, Black
- **Standard Pack:** 1000/Bag

Symbol	Mounting hole diameter	Panel thickness range	H	h	Head diameter	Type	Standard pack	Rivet hand tool	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]		[szt./pcs]				
O-PR-30-13	3	1.0 - 4.0	5.7	1.3	5	1	250	O-PPR-T110	PA 66	UL94 V-2	natural
O-PR-30-13-BLK	3	1.0 - 4.0	5.7	1.3	5	1	250	O-PPR-T110	PA 66	UL94 V-2	black
BM-PR-33-13	3.3	0.5 - 3.5	5	1.3	4.8	1	250	-	PA 66	UL94 V-2	natural
BM-PR-33-13-BLK	3.3	0.5 - 3.5	5	1.3	4.8	1	250	-	PA 66	UL94 V-2	black
O-PR-35-13	3.5	1.0 - 5.0	6.8	1.3	6	1	250	O-PPR-T120	PA 66	UL94 V-2	natural
O-PR-35-13-BLK	3.5	1.0 - 5.0	6.8	1.3	6	1	250	O-PPR-T120	PA 66	UL94 V-2	black
O-PR-36-20	3.6	2.0 - 5.5	7	2	7.7	1	250	-	PA 66	UL94 V-2	natural
O-PR-36-20-BLK	3.6	2.0 - 5.5	7	2	7.7	1	250	-	PA 66	UL94 V-2	black
O-PR-40-15	4	1.5 - 6.0	7.9	1.5	6.5	1	250	O-PPR-T130	PA 66	UL94 V-2	natural
O-PR-40-15-BLK	4	1.5 - 6.0	7.9	1.5	6.5	1	250	O-PPR-T130	PA 66	UL94 V-2	black
O-PR-40-15-4-BLK	4	4.0 - 6.5	8	1.5	6.5	1	250	-	PA 66	UL94 V-2	black
BM-PR-40-15	4	4.0 - 6.5	8	1.5	7.5	1	250	-	PA 66	UL94 V-2	natural
BM-PR-40-15-BLK	4	4.0 - 6.5	8	1.5	7.5	1	250	-	PA 66	UL94 V-2	black
BM-PR-41-15	4.1	0.6 - 4.5	6	1.5	6	1	250	-	PA 66	UL94 V-2	natural
BM-PR-41-15-BLK	4.1	0.6 - 4.5	6	1.5	6	1	250	-	PA 66	UL94 V-2	black
O-PR-44-17	4.4	1.0 - 3.5	5	1.7	6	1	250	-	PA 66	UL94 V-2	natural
O-PR-48-25	4.8	1.6 - 4.7	7.4	2.5	8.7	1	250	-	PA 66	UL94 V-2	natural
O-PR-48-25-BLK	4.8	1.6 - 4.7	7.4	2.5	8.7	1	250	-	PA 66	UL94 V-2	black
PPR-5	4.8	1.0 - 9.5	10.7	1.6	7.1	2	1000	PPR-T1	PA 66	UL94 V-2	natural
PPR-5B	4.8	1.0 - 9.5	10.7	1.6	7.1	2	1000	PPR-T1	PA 66	UL94 V-2	black
PPR-2	4.8	4.0 - 7.1	9.7	1.5	10.9	1	1000	PPR-T1	PA 66	UL94 V-2	natural
PPR-2B	4.8	4.0 - 7.1	9.7	1.5	10.9	1	1000	PPR-T1	PA 66	UL94 V-2	black
O-PR-48-12	4.8	4.0 - 8.7	11	1.2	7.1	1	250	O-PPR-T008	PA 66	UL94 V-2	natural
O-PR-48-12-BLK	4.8	4.0 - 8.7	11	1.2	7.1	1	250	O-PPR-T008	PA 66	UL94 V-2	black
O-PR-50-20-1-BLK	5	1.5 - 5.0	7.4	2	7.1	1	250	PPR-T1	PA 66	UL94 V-2	black
PPR-93-7	5	1.5 - 5.0	7.4	2	7.1	1	250	PPR-T1	PA 66	UL94 V-2	natural

Symbol	Mounting hole diameter	Panel thickness range	H	h	Head diameter	Type	Standard pack	Rivet hand tool	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]		[szt./pcs]				
-	5	1.5 - 5.0	7.4	2	7.1	1	250	-	PA 66	UL94 V-2	black
O-PR-50-20	5	1.5 - 5.0	7.4	2	7.1	1	250	-	PA 66	UL94 V-2	natural
O-PR-50-18	5	1.5 - 7.0	9.2	1.8	8.5	1	250	O-PPR-T140	PA 66	UL94 V-2	natural
O-PR-50-18-BLK	5	1.5 - 7.0	9.2	1.8	8.5	1	250	O-PPR-T140	PA 66	UL94 V-2	black
O-PR-50-20-3-BLK	5	3.0 - 7.0	11	2	9.7	1	250	-	PA 66	UL94 V-2	black
PPR-1	5.5	2.4 - 4.0	11.4	2	9.4	1	1000	PPR-T1	PA 66	UL94 V-2	natural
PPR-1B	5.5	2.4 - 4.0	11.4	2	9.4	1	1000	PPR-T1	PA 66	UL94 V-2	black
O-PR-60-22	6	2.0 - 8.0	10.5	2.2	10	1	250	O-PPR-T150	PA 66	UL94 V-2	natural
O-PR-60-22-BLK	6	2.0 - 8.0	10.5	2.2	10	1	250	O-PPR-T150	PA 66	UL94 V-2	black
O-PR-60-20	6	3.0 - 7.0	10	2	11	1	250	O-PPR-T024	PA 66	UL94 V-2	natural
O-PR-60-20-BLK	6	3.0 - 7.0	10	2	11	1	250	O-PPR-T024	PA 66	UL94 V-2	black
PPR-9	6.4	1.5 - 6.4	9.3	4.7	11.1	3	1000	PPR-T4	PA 66	UL94 V-2	natural
PPR-9B	6.4	1.5 - 6.4	9.3	4.7	11.1	3	1000	PPR-T4	PA 66	UL94 V-2	black
O-PR-64-20	6.4	4.0 - 9.5	12	2	11	1	250	-	PA 66	UL94 V-2	natural
O-PR-64-20-BLK	6.4	4.0 - 9.5	12	2	11	1	250	-	PA 66	UL94 V-2	black
PPR-4	6.4	7.1 - 12.7	15.8	2	11.9	1	1000	PPR-T4	PA 66	UL94 V-2	natural
PPR-4B	6.4	7.1 - 12.7	15.8	2	11.9	1	1000	PPR-T4	PA 66	UL94 V-2	black
O-PR-70-26	7	2.5 - 9.0	11.8	2.6	12	1	250	O-PPR-T160	PA 66	UL94 V-2	natural
O-PR-70-26-BLK	7	2.5 - 9.0	11.8	2.6	12	1	250	O-PPR-T160	PA 66	UL94 V-2	black
O-PR-71-25	7.1	4.0 - 12.0	17.5	2.5	17	1	250	O-PPR-T018	PA 66	UL94 V-2	natural
O-PR-71-25-BLK	7.1	4.0 - 12.0	17.5	2.5	17	1	250	O-PPR-T018	PA 66	UL94 V-2	black
O-PR-80-30	8	3.0 - 10.0	13	3	13.5	1	250	O-PPR-T170	PA 66	UL94 V-2	natural
O-PR-80-30-BLK	8	3.0 - 10.0	13	3	13.5	1	250	O-PPR-T170	PA 66	UL94 V-2	black