


PSE -

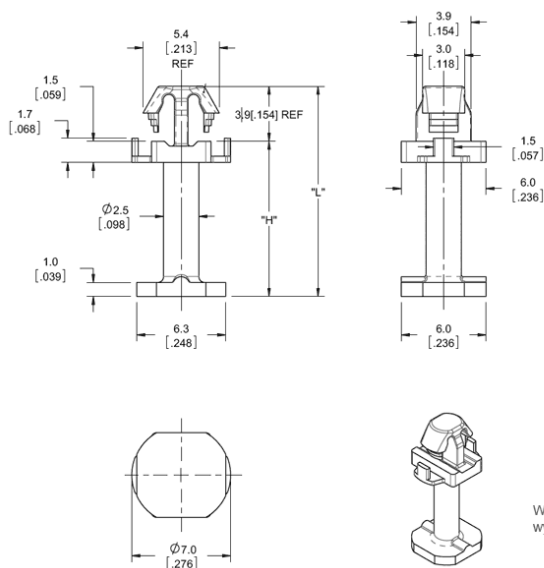

W nawiasach kwadratowych
wymiary w calach

Details:

- **Material: UL94 V-2 Nylon 6/6, RMS-01***
- **Material: UL94 V-0 Nylon 6/6, RMS-19***
- **Color: Natural**
- Top Hole: Snap-Lock Ø 4.0-4.2 mm
- Panel Thickness: 0.8-1.6 mm
- **Standard Pack: 1000/Bag**

Symbol	Height H	L	Mounting hole diameter range	Top panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
PSE-4M-01	4	7.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-2	natural
PSE-4M-19	4	7.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-0	natural
PSE-6M-01	6	9.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-2	natural
PSE-6M-19	6	9.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-0	natural
PSE-7M-01	7	10.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-2	natural
PSE-7M-19	7	10.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-0	natural
PSE-8M-01	8	11.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-2	natural
PSE-8M-19	8	11.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-0	natural
PSE-10M-01	10	13.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-2	natural
PSE-10M-19	10	13.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-0	natural
PSE-11M-01	11	14.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-2	natural
PSE-11M-19	11	14.9	4.0 - 4.2	0.8 - 1.6	PA 66	UL94 V-0	natural